



EVERLIGHT ELECTRONICS CO.,LTD.

PART NO. : 67-21UYC/S400-A6/TR8

Device Number : DSE-671-139 REV. 1.2

TOP LEDs

ECN : Page: 1/7

Features :

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Ideal for backlight and light pipe application.
- Inter reflector.
- Low (2mA) current operation.
- Wide viewing angle.
- Computable with automatic placement equipment.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Available on tape and reel (8mm Tape).


Description :

- The 67-21 series is available in soft-orange, green, blue and yellow, Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector, this feature makes the SMT TOP LED ideal for light pipe application, The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications :

- Automotive: backlight in dashboards and switches
- Telecommunication: indicator and backlight in telephone and fax.
- Indicator and backlight for audio and video equipment.
- Indicator and backlight in office and family equipment.
- Flat backlight for LCD's, switches and symbols.
- Light pipe application.
- General use.

Package Dimension :

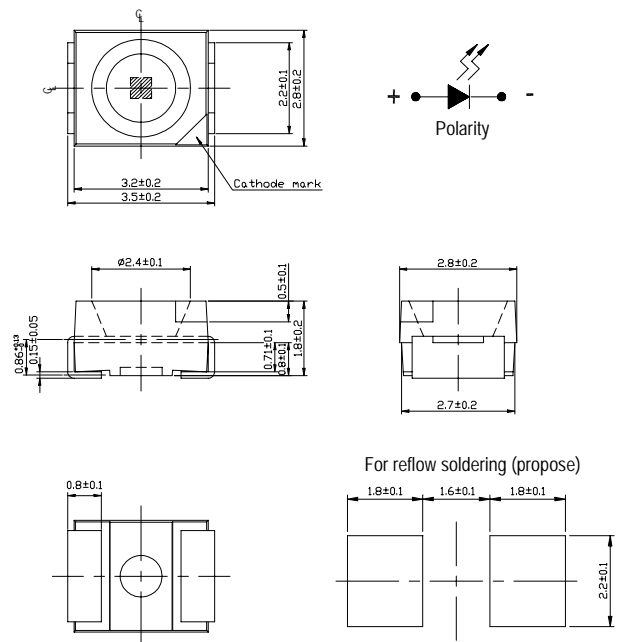

Notes:

Tolerances Unless Dimension $\pm 0.1\text{mm}$
Angle $\pm 0.5^\circ$
Unit = mm

Part NO.	Chip		Lens Color
	Material	Emitted Color	
67-21UYC/S400-A6/TR8	AlGaInP	Super Yellow	Water Clear

B990778 990552

Office: NO. 25, Lane 76, Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL: 886-2-2267-2000, 2267-9936

FAX: 886-2-2267-6244, 2267-6189, 2267-6306

[http: //www.everlight.com](http://www.everlight.com)




EVERLIGHT ELECTRONICS CO.,LTD.

PART NO. : 67-21UYC/S400-A6/TR8
TOP LEDs


Device Number : DSE-671-139 REV. 1.2

ECN : Page: 2/7

Package Dimension :

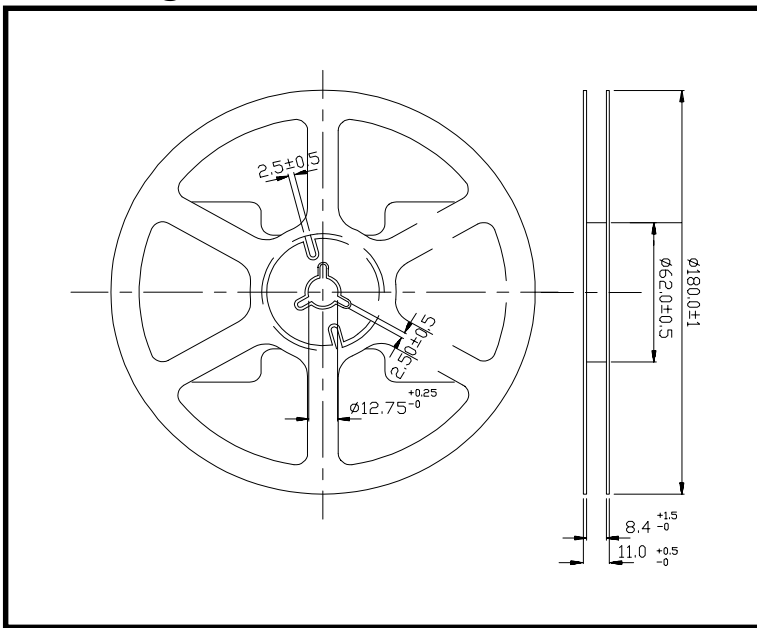

Loaded quantity per reel 2000 pcs/reel :

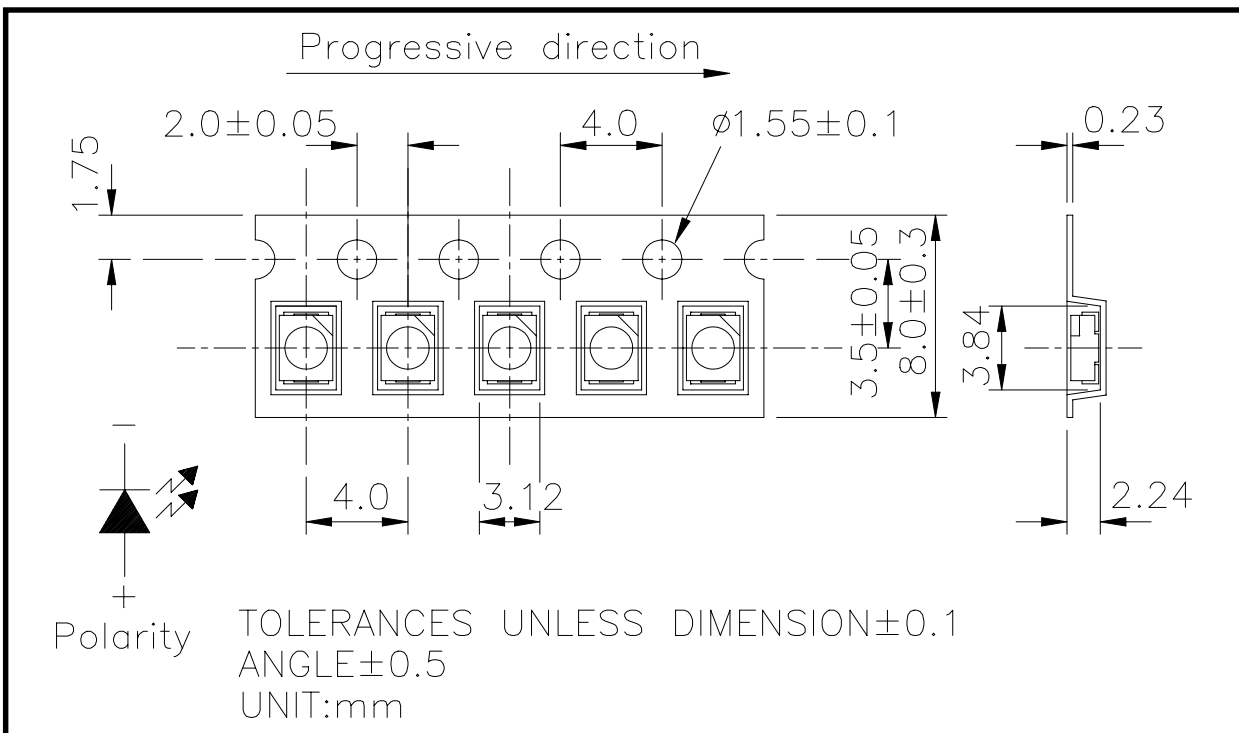



EVERLIGHT ELECTRONICS CO.,LTD.

PART NO. : 67-21UYC/S400-A6/TR8

Device Number : DSE-671-139 REV. 1.2

TOP LEDs

ECN : Page: 3/7

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Reverse Voltage	V _R	5	V
Forward Current	I _F	50	mA
Operating Temperature	T _{opr}	-40 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Soldering Temperature	T _{sol}	260 (for 5 second)	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	P _d	120	mW
Peak Forward Current(Duty 1/10 @ 1KHz)	I _{F(Peak)}	200	mA

Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous intensity	I _v	-----	7.5	-----	mcd	I _F =2mA
		100	168	-----	mcd	I _F =20mA
Viewing Angle	2 θ 1/2	-----	120	-----	deg	I _F =20mA
Peak Wavelength	λ _p	-----	591	-----	nm	I _F =20mA
Dominant Wavelength	λ _d	-----	589	-----	nm	I _F =20mA
Spectrum Radiation Bandwidth	△ λ	-----	15	-----	nm	I _F =20mA
Forward Voltage	V _F	-----	2.0	2.4	V	I _F =20mA
Reverse Current	I _R	-----	-----	10	μ A	V _R =5V



EVERLIGHT ELECTRONICS CO.,LTD.





PART NO. : 67-21UYC/S400-A6/TR8

Device Number : DSE-671-139 REV. 1.2



TOP LEDs

ECN : Page: 4/7

Typical Electro-Optical Characteristic Curves

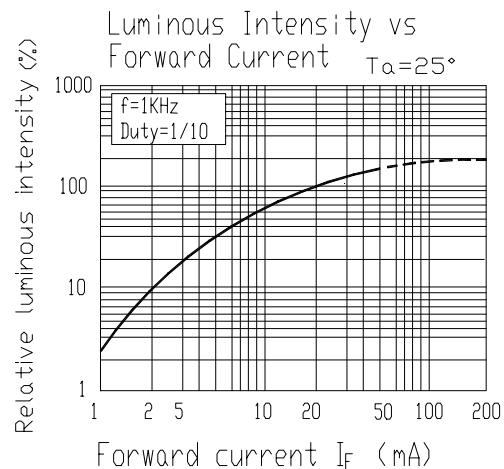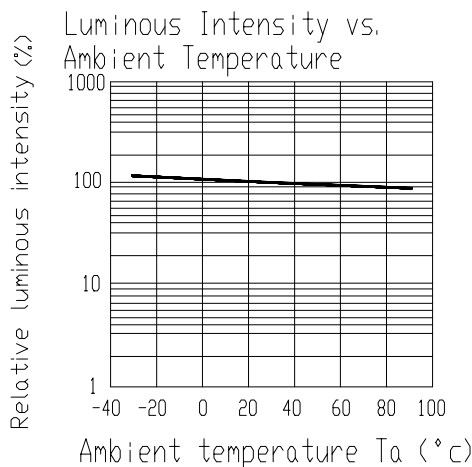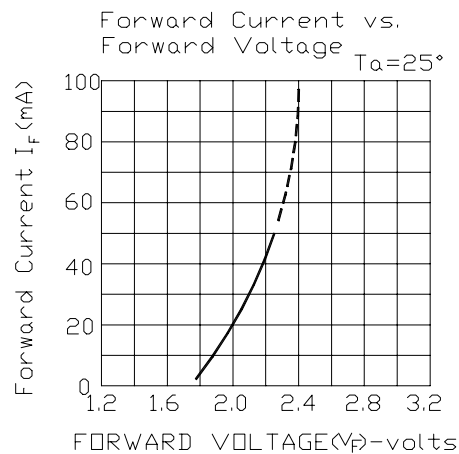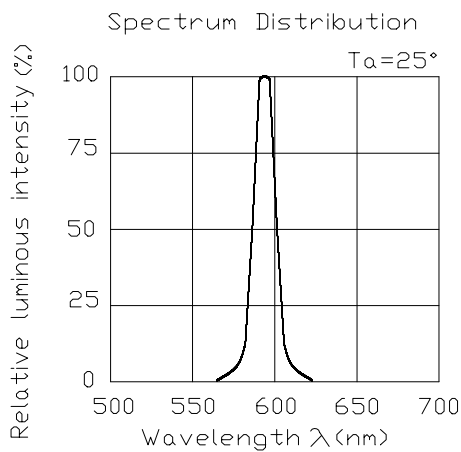

Forward Current Derating Curve

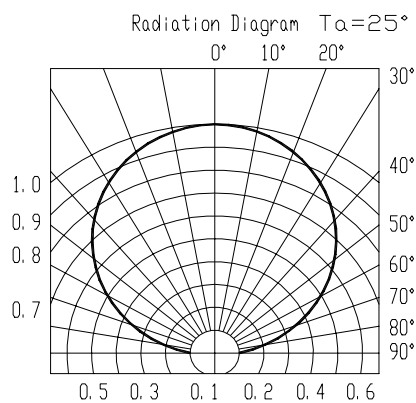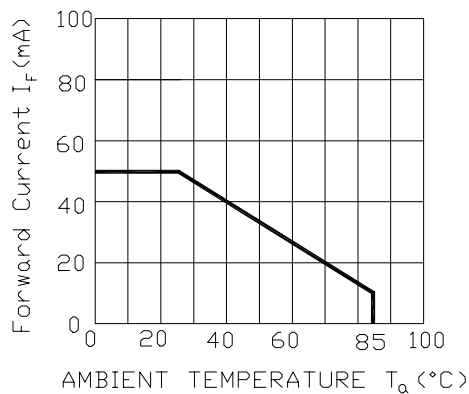



EVERLIGHT ELECTRONICS CO.,LTD.

PART NO. : 67-21UYC/S400-A6/TR8

Device Number : DSE-671-139 REV. 1.2

TOP LEDs

ECN : Page: 5/7

Reliability Test Items And Conditions

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	I _F = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1

Products are evaluated according to the above standard reliability criteria.



EVERLIGHT ELECTRONICS CO.,LTD.

PART NO. : 67-21UYC/S400-A6/TR8


Device Number : DSE-671-139 REV. 1.2

TOP LEDs

ECN : Page: 6/7

■ Soldering heat reliability (DIP)

Please refer to the following figure :

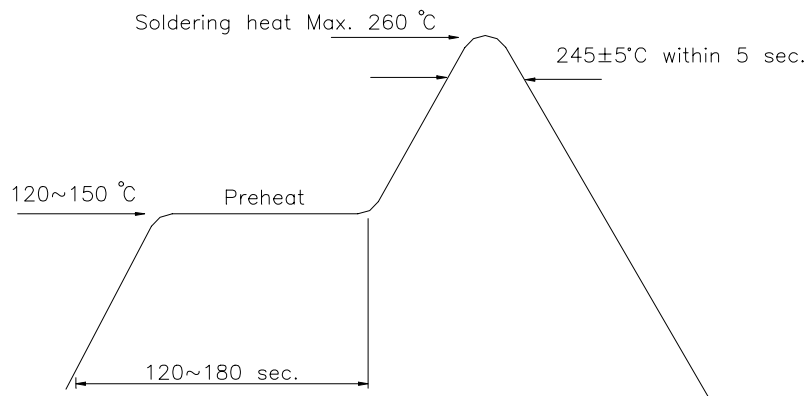


■ Soldering Iron

Basic spec is ≤ 5 sec when 245°C . If temperature is higher, time should be shorter ($+10^{\circ}\text{C} \rightarrow -1\text{sec}$). Power dissipation of Iron should be smaller than 15 W , and temperature should be controllable. Surface temperature of the device should be under 230°C .

■ Rework

1. Customer must finish rework within 5 sec under 245°C .
2. Copper foil can not be touched by the head of iron.
3. Twin-head type is preferred.

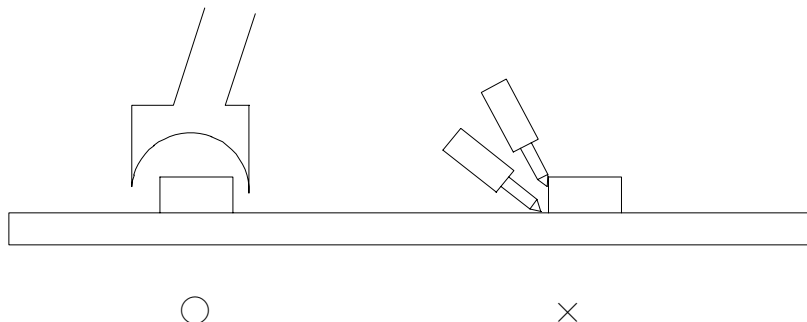



EVERLIGHT ELECTRONICS CO.,LTD.

PART NO. : 67-21UYC/S400-A6/TR8

Device Number : DSE-671-139 REV. 1.2

TOP LEDs

ECN : Page: 7/7

■ Reflow Temp. / Time :

