



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDS-321-012 REV: 1.0

0.3" Single Digit Displays

MODEL NO : ELS-321SURWA/S530-A2 ECN : Page: 1/5

■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

■ Applications:

- Audio equipment
- Instrument panels
- Digital read out display

■ Description :

- The ELS-321series is a large 7.62mm (0.3")high seven segment display design for viewing distances up to 7 meters.
- These displays provide excellent reliability in bright ambient light .
- These device is made with white segments and gray surface.

PART NO	CHIP		C.C. or C.A.
	Material	Emitted Color	
ELS-321SURWA/S530-A2	AlGaInP	Hyper Red	C.C.

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936

FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>



Device Number : DDS-321-012

REV: 1.0


0.3" Single Digit Displays

MODEL NO : ELS-321SURWA/S530-A2

ECN : _____

Page: 2/5

■ Package Dimension:

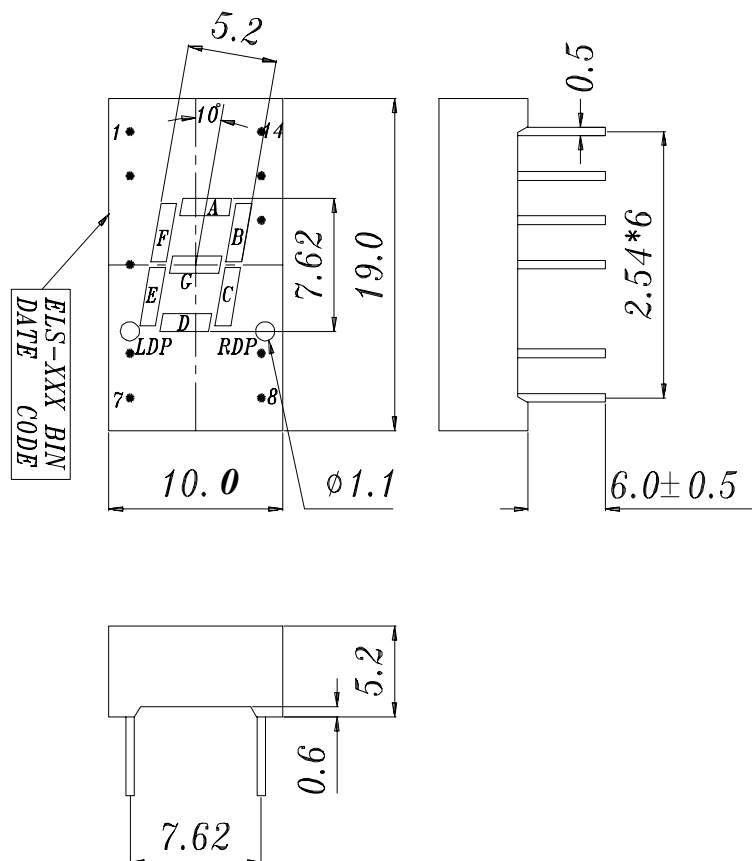

COMMON CATHODE

1 *ANODE* *F*

2 *ANODE* *G*

3 NO PIN

4 COMMON CATHODE

5 NO PIN


6 *ANODE* *E*7 *ANODE* *D*8 *ANODE* *C*9 *ANODE* *RDP*

10 NO PIN

11 NO PIN

12 COMMON CATHODE

13 ANODE B

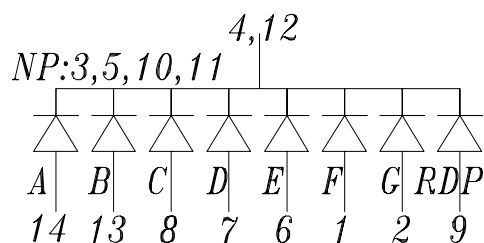14 *ANODE* A

■ NOTES:

1.All dimensions are millimeters, tolerance is 0.25mm unless otherwise noted.

2.Above specification may be changed without notice.

Supplier will reserve authority on material change for above specification.



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDS-321-012 REV: 1.0

0.3" Single Digit Displays

MODEL NO : ELS-321SURWA/S530-A2 ECN : Page: 3/5

■ Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	25	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA

■ Electronic optical characteristics :

Parameter		Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Per segment	Iv	0.45	1.6		mcd	If=2mA
			4.00	10.6	----	mcd	If=10mA
	Per decimal point		0.28	0.45		mcd	If=2mA
			1.05	5.6	----	mcd	If=10mA
Peak Wavelength		λ p	----	632	----	nm	If=20mA
Dominant Wavelength		λ d	----	624	----	nm	If=20mA
Spectrum Radiation Bandwidth		$\triangle \lambda$	----	20	----	nm	If=20mA
Forward Voltage		Vf	----	2.0	2.4	V	If=20mA
Reverse Current		Ir	----	----	10	μ A	Vr=5V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDS-321-012 REV: 1.0

0.3" Single Digit Displays

MODEL NO : ELS-321SURWA/S530-A2 ECN : _____ Page: 4/5

■ Reliability test item and condition:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1

--



0.3" Single Digit Displays

MODEL NO: ELS-321SURWA/S530-A2 ECN : Page: 5/5

Typical Electro-Optical Characteristic Curves:

