

1.5 Amp. Surface Mounted Glass Passivated Fast Recovery Rectifier


<p>Dimensions in mm.</p> <p>CASE: SMB/DO-214AA</p>	<p>Voltage 50 to 1000 V</p> <p>Current 1.5 A</p> <p>HYPERECTIFIER®</p> <ul style="list-style-type: none"> • Glass passivated junction • High current capability • The plastic material carries U/L 94 V-0 • Low profile package • Easy pick and place • High temperature soldering 260 °C 10 sec <p>MECHANICAL DATA Terminals: Solder plated, solderable per IEC 68-2-20. Standard Packaging: 8 mm. tape (EIA-RS-481). Weight: 0.093 g.</p>
--	--

Maximum Ratings and Electrical Characteristics at 25 °C


		FRS2A	FRS2B	FRS2D	FRS2G	FRS2J	FRS2K	FRS2M
Marking Code		G1	G2	G3	G4	G5	G6	G7
V _{RRM}	Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000
V _{RMS}	Maximum RMS Voltage	35	70	140	280	420	560	700
V _{DC}	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000
I _{F(AV)}	Forward current at T _L = 100 °C	1.5 A						
I _{FSM}	8.3 ms. peak forward surge current (Jedec Method)	50 A						
V _F	Maximum Instantaneous Forward Voltage at 1.5 A	1.3 V						
I _R	Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 125 °C	5 μA 200 μA						
t _{rr}	Maximum Reverse Recovery Time (0.5/1/0.25A)	150 ns				250 ns	300 ns	
C _j	Typical Junction Capacitance (1MHz; -4V)	35 pF						
R _{th (j-l)} R _{th (j-a)}	Typical Thermal Resistance (5x5 mm ² x 130 μ Copper Area)	20 °C/W 60 °C/W						
T _j - T _{stg}	Operating Junction and Storage Temperature Range	-55 to + 150 °C						

Rating And Characteristic Curves


FORWARD CURRENT DERATING CURVE

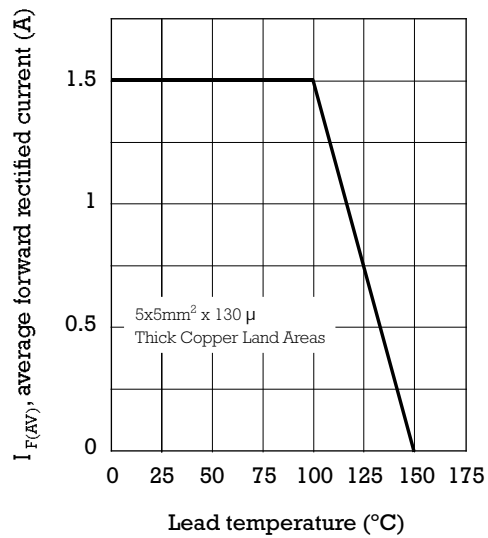


TYPICAL FORWARD CHARACTERISTIC

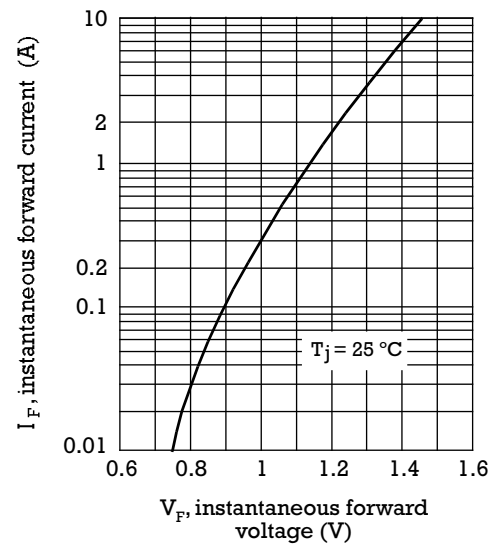

MAXIMUM NON REPETITIVE
PEAK FORWARD SURGE CURRENT

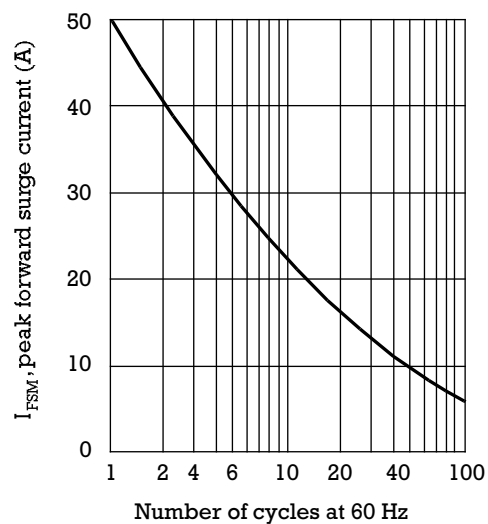

TYPICAL REVERSE CHARACTERISTIC

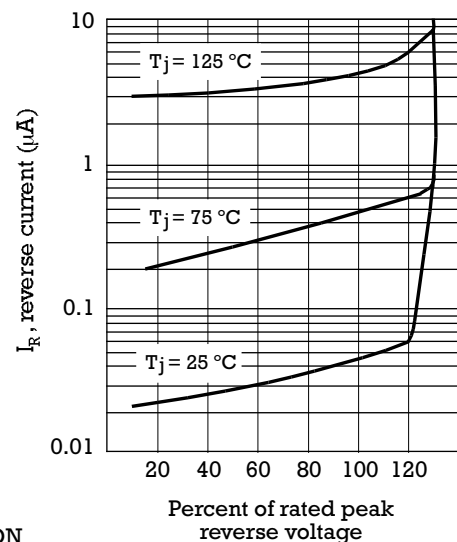

TYPICAL JUNCTION
CAPACITANCE

