


## 1.0 Amp Glass Passivated Sintered Rectifiers




# 1.0 Amp Glass Passivated Sintered Rectifiers

GPZ10A . . . 10Q Series


Forward Current Derating Curve

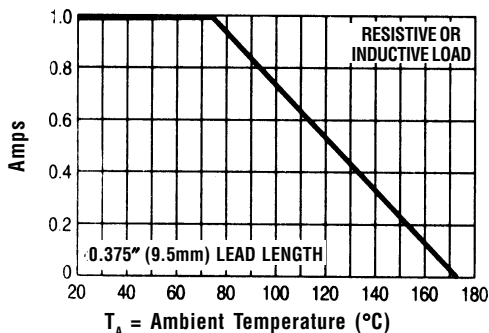


Die Dimension (mils)

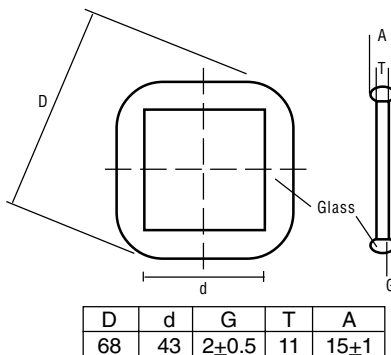


Non-Repetitive Peak Forward Surge Current

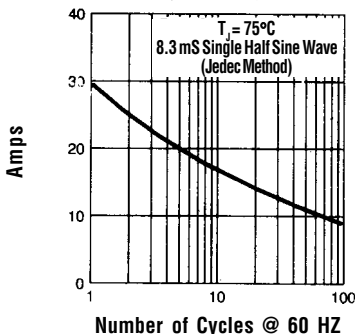


Typical Junction Capacitance

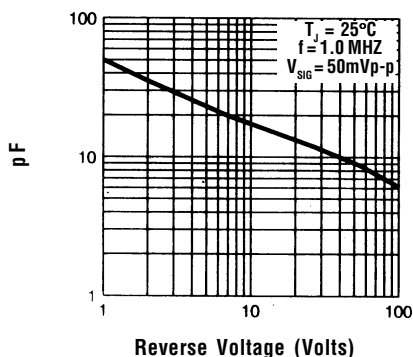

Typical Instantaneous Forward Characteristics

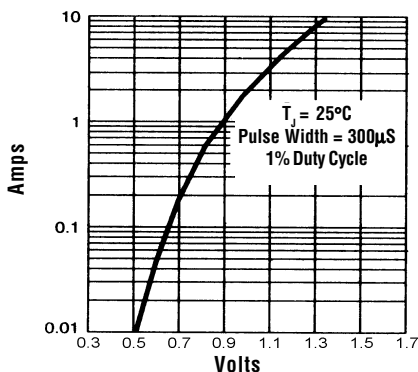

Typical Reverse Characteristics

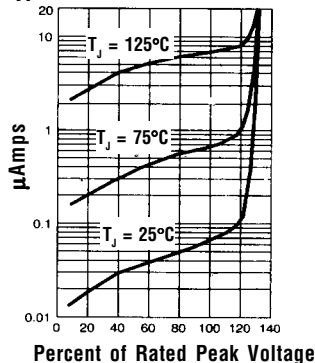

Ratings at 25 Deg. C ambient temperature unless otherwise specified.

Single Phase Half Wave, 60 HZ Resistive or Inductive Load.

For Capacitive Load, Derate Current by 20%.

- NOTES:**
1. Measured @ 1 MHz and applied reverse voltage of 4.0V.
  2. Thermal Resistance from Junction to Ambient at 3/8" Lead Length, P.C. Board Mounted.
  3. Reverse Recovery Condition  $I_F = 0.5\text{A}$ ,  $I_R = 1.0\text{A}$ ,  $I_{RR} = 0.25\text{A}$ .