






**Description****Mechanical Dimensions****TO 3P****Features**


- **LOW FORWARD VOLTAGE**
- **HIGH SURGE CAPABILITY**

- **SUPERFAST RECOVERY TIME**
- **MEETS UL SPECIFICATION 94V-0**


Electrical Characteristics @ 25°C.	VF30C05 . . . 60 Series								Units
Maximum Ratings	05	10	15	20	30	40	50	60	
Peak Repetitive Reverse Voltage... V_{RRM}	50	100	150	200	300	400	500	600	Volts
Working Peak Reverse Voltage... V_{RWM}	50	100	150	200	300	400	500	600	Volts
DC Blocking Voltage... V_{DC}	50	100	150	200	300	400	500	600	Volts
RMS Reverse Voltage... $V_{R(rms)}$	35	70	105	140	210	280	350	420	Volts
Average Forward Rectified Current... $I_{F(av)}$ $T_C = 150^\circ\text{C}$ @ Rated V_{DC}	15	Amps
	30	Amps
Repetitive Peak Forward Surge Current... I_{FM} @ Rated V_{DC} , Square Wave, 20 KHZ, $T_C = 150^\circ\text{C}$	30	Amps
Non-Repetitive Peak Forward Surge Current... I_{FSM} @ Rated Load Cond., 1/2 Wave, Single Phase, 60HZ	300	Amps
Forward Voltage... V_F @ $I_F = 15$ Amps, PW = 300 μ s $T_C = 150^\circ\text{C}$ $T_C = 25^\circ\text{C}$	< 1.0 >	< 1.1 >	< 1.3 >	< 1.4 >	< 1.4 >	< 1.6 >	< 1.6 >	< 1.6 >	Volts Volts
DC Reverse Current... I_R @ Rated DC Blocking Voltage $T_C = 150^\circ\text{C}$ $T_C = 25^\circ\text{C}$	< 250 >	< 500 >	< 10 >	< 5.0 >	< 5.0 >	< 10 >	< 10 >	< 10 >	μ Amps μ Amps
Reverse Recovery Time... t_{RR} $I_F = 1.0$ Amp, di/dt = 50 Amps/ μ S	< 50 >	< 75 >	< 75 >	< 75 >	< 75 >	< 75 >	< 75 >	< 75 >	nS
Operating & Storage Temperature Range... T_J , T_{STRG}	-65 to 175	$^\circ\text{C}$

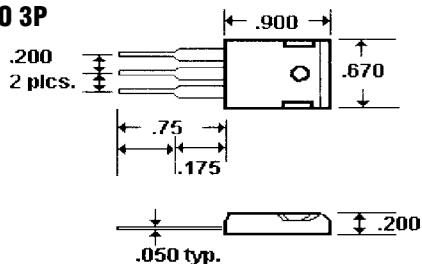


Forward Current Derating Curve

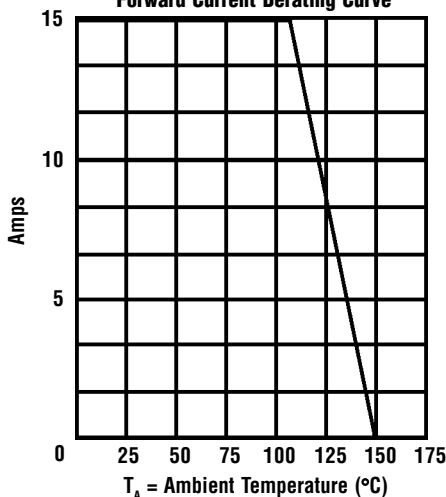


Non-Repetitive
Peak Forward Surge Current

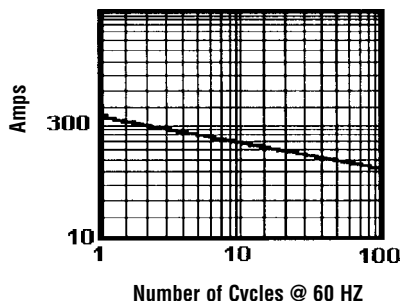



Typical Reverse Characteristics

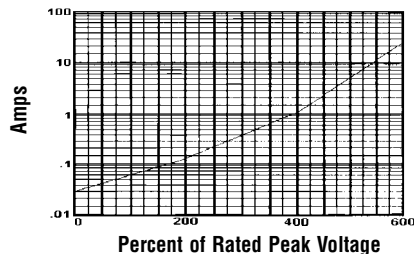

Typical Junction Capacitance

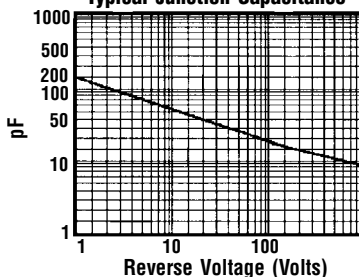


Typical Instantaneous
Forward Characteristics

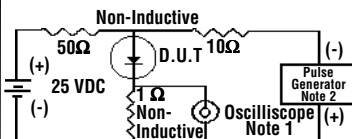

Notes:

1. Rise Time = 7 nS Max.
Impedance = 1 megohm, 22 pF
2. Rise Time = 10 nS Max.
Source Impedance = 50 Ohms

Reverse Recovery
Characteristics



Time Base Set @ 50/100nS/cm

Ratings at
25 Deg. C ambient
temperature
unless otherwise
specified.

Single Phase Half
Wave, 60 HZ
Resistive or
Inductive Load.

For Capacitive
Load, Derate
Current by 20%.