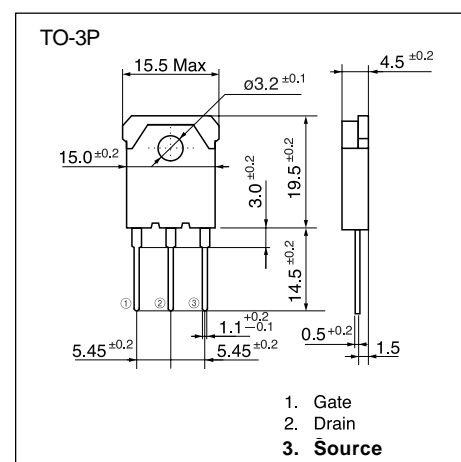


**N-CHANNEL SILICON POWER MOS-FET****■ Features**


High speed switching  
 Low on-resistance  
 No secondary breakdown  
 Low driving power  
 Avalanche-proof

**■ Applications**

Switching regulators  
 UPS (Uninterruptible Power Supply)  
 DC-DC converters

**■ Maximum ratings and characteristic Absolute maximum ratings****● (T<sub>c</sub>=25°C unless otherwise specified)**

Item	Symbol	Rating	Unit
Drain-source voltage	V <sub>DS</sub>	60	V
Continuous drain current	I <sub>D</sub>	±80	A
Pulsed drain current	I <sub>D(puls)</sub>	±320	A
Gate-source voltage	V <sub>GS</sub>	±30	V
Maximum Avalanche Energy	E <sub>AV</sub> *1	972.3	mJ
Max. power dissipation	P <sub>D</sub>	125	W
Operating and storage temperature range	T <sub>ch</sub> T <sub>stg</sub>	+150 -55 to +150	°C

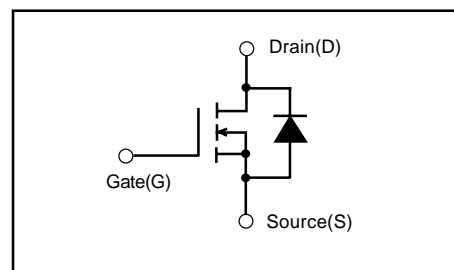\*1 L=0.203mH, V<sub>cc</sub>=24V**■ Equivalent circuit schematic****● Electrical characteristics (T<sub>c</sub> =25°C unless otherwise specified)**

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	BV <sub>DSS</sub>	I <sub>D</sub> =1mA V <sub>GS</sub> =0V	60			V
Gate threshold voltage	V <sub>GS(th)</sub>	I <sub>D</sub> =10mA V <sub>DS</sub> =V <sub>GS</sub>	2.5	3.0	3.5	V
Zero gate voltage drain current	I <sub>DSS</sub>	V <sub>DS</sub> =60V V <sub>GS</sub> =0V		10	500	μA
		T <sub>ch</sub> =125°C		0.2	1.0	mA
Gate-source leakage current	I <sub>GSS</sub>	V <sub>GS</sub> =±30V V <sub>DS</sub> =0V		10	100	nA
Drain-source on-state resistance	R <sub>DS(on)</sub>	I <sub>D</sub> =40A V <sub>GS</sub> =10V		9.5	12	mΩ
Forward transconductance	g <sub>fs</sub>	I <sub>D</sub> =40A V <sub>DS</sub> =25V	20	40		S
Input capacitance	C <sub>iss</sub>	V <sub>DS</sub> =25V		3100	4650	pF
Output capacitance	C <sub>oss</sub>	V <sub>GS</sub> =0V		1300	1950	pF
Reverse transfer capacitance	C <sub>rss</sub>	f=1MHz		350	530	pF
Turn-on time t <sub>on</sub>	td(on)	V <sub>CC</sub> =30V I <sub>D</sub> =80A		20	30	ns
	t <sub>r</sub>	V <sub>GS</sub> =10V		85	120	ns
Turn-off time t <sub>off</sub>	td(off)	R <sub>GS</sub> =10 Ω		88	130	ns
	t <sub>f</sub>			65	120	ns
Avalanche capability	I <sub>AV</sub>	L=100 μH T <sub>ch</sub> =25°C	80			A
Diode forward on-voltage	V <sub>SD</sub>	I <sub>F</sub> =50A V <sub>GS</sub> =0V T <sub>ch</sub> =25°C		1.0	1.5	V
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> =50A V <sub>GS</sub> =0V		70		ns
Reverse recovery charge	Q <sub>rr</sub>	-di/dt=100A/μs T <sub>ch</sub> =25°C		0.13		μC

**● Thermal characteristics**

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R <sub>th(ch-c)</sub>	channel to case			1.0	°C/W
	R <sub>th(ch-a)</sub>	channel to ambient			35.0	°C/W

■ Characteristics

