

FAST RECOVERY DIODE

Features

- High speed switching
- High reliability

Applications

- High speed switching

Maximum ratings and characteristics


- Absolute maximum ratings

Item	Symbol	Conditions	Rating		Unit
			-02	-04	
Repetitive peak reverse voltage	V_{RRM}		200	400	V
Non-repetitive peak reverse voltage	V_{RSM}		200	400	V
Average forward current	$I_{F(AV)}$	Resistive load ($T_a=40^{\circ}\text{C}$)	1.2		A
Surge current	I_{FSM}	Sine wave 10ms	40		A
Operating junction temperature	T_j		-40 to +140		$^{\circ}\text{C}$
Storage temperature	T_{stg}		-40 to +140		$^{\circ}\text{C}$


- Electrical characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_{FM}	$I_{FM}=1.2\text{A}$	0.95	V
Reverse current	I_{RRM}	$V_R=V_{RRM}$	10	μA
Reverse recovery time	t_{rr}	$I_F=0.1\text{A}$, $I_R=0.1\text{A}$	0.4	μs

Outline drawings, mm

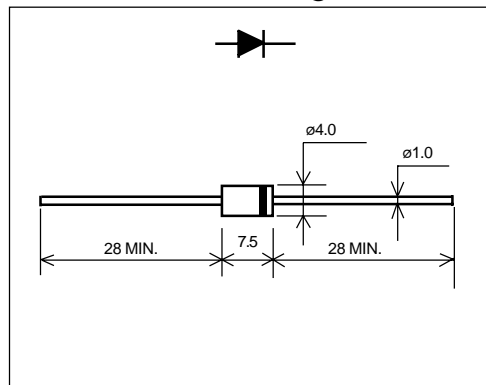

Marking

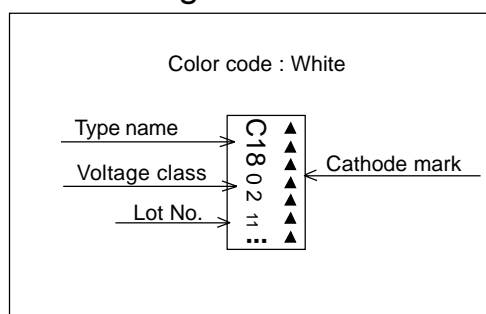

■ Characteristics

