


RKBPC35005 Thru RKBPC3510



35 AMP FAST RECOVERY BRIDGE RECTIFIER

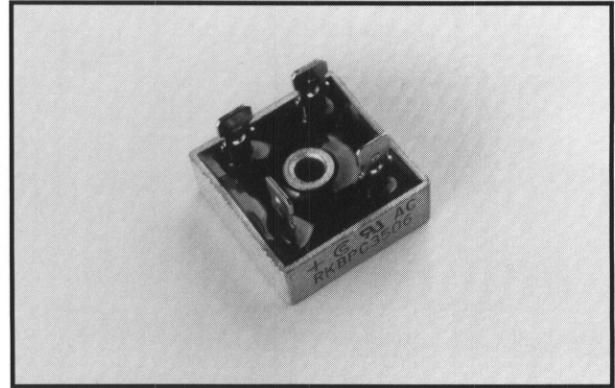

FEATURES

- Rating to 1000V PRV
- High efficiency
- 400 Amperes surge capability
- Electrically isolated metal case for maximum heat dissipation
- UL recognized: File #E106441


Mechanical Data

- Case: Metal
- Mounting: through hole for #8 screw
- Weight: 1.1 ounce, 31.6 grams

Maximum Ratings & Characteristics

- Ratings at 25° C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load
- For capacitive load, derate current by 20%

Outline Drawing

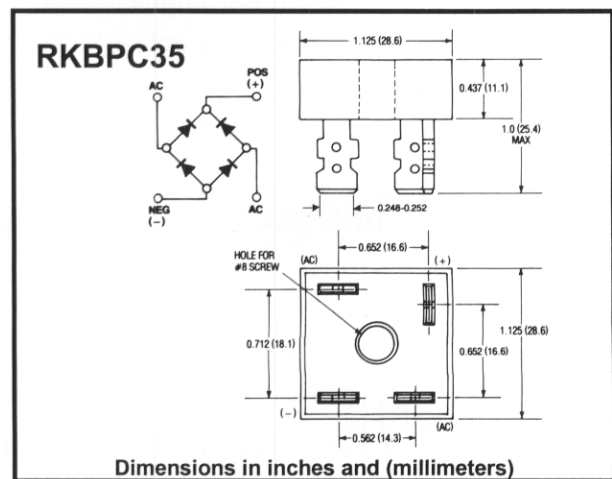

		RKBPC 35005	RKBPC 3501	RKBPC 3502	RKBPC 3504	RKBPC 3506	RKBPC 3508	RKBPC 3510	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Output Current @ T _C = 55°C	I _(AV)	35.0							A
Peak Forward Surge Current 8.3 ms Single Half-Sine-Wave Superimposed On Rated Load	I _{FSM}	400							A
Maximum DC Forward Voltage Drop per Element At 17.5A DC	V _F	1.3							V
Maximum Reverse Current At Rated DC Blocking Voltage per Element @ T _A = 25°C @ T _A = 100°C	I _R	10 1							μA mA
Maximum Recovery Time (Note 1)	t _{rr}	200				300	500		nS
I ² t Rating for Fusing (t < 8.3ms)	I ² t	664							A ² S
Typical Thermal Resistance (Note 2)	R _{THJA}	2.5							°C/W
Operating Temperature Range	T _J	-55 to +125							°C
Storage Temperature Range	T _{STG}	-55 to +150							°C

- Note: 1. Reverse recovery test conditions: $I_F = 0.5A$, $I_R = -1.0A$, $I_{RR} = -0.25A$
2. Mounted on 11.8 in² X 0.06 in thick (300mm² X 1.5mm thick) copper plate