


TP902C2 (10A)

(200V / 10A)

LOW LOSS SUPER HIGH SPEED RECTIFIER

■ Outline drawings, mm

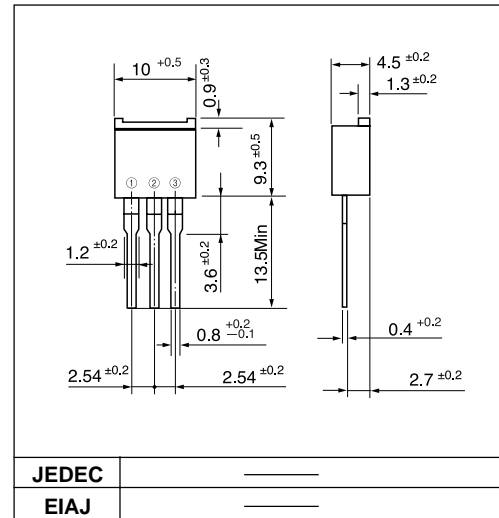

■ Features

- Low V_F
- Super high speed switching
- High reliability by planer design

■ Applications

- High speed power switching


■ Maximum ratings and characteristics

- Absolute maximum ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}		200	V
Average output current	I_O	Square wave, duty=1/2, $T_c=125^{\circ}C$	10*	A
Surge current	I_{FSM}	Sine wave 10ms	50	A
Operating junction temperature	T_j		-40 to +150	$^{\circ}C$
Storage temperature	T_{stg}		-40 to +150	$^{\circ}C$

*Average forward current of centertap full wave connection

■ Connection diagram

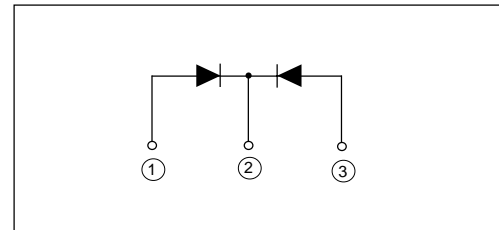


- Electrical characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)


Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_{FM}	$I_{FM}=5.0A$	0.95	V
Reverse current	I_{RRM}	$V_R=V_{RRM}$	100	μA
Reverse recovery time	t_{rr}	$I_F=0.1A$, $I_R=0.2A$, $I_{rec}=0.05A$	35	ns
Thermal resistance	$R_{th(j-c)}$	Junction to case	2.5*	$^{\circ}C/W$

Characteristics


Forward characteristics

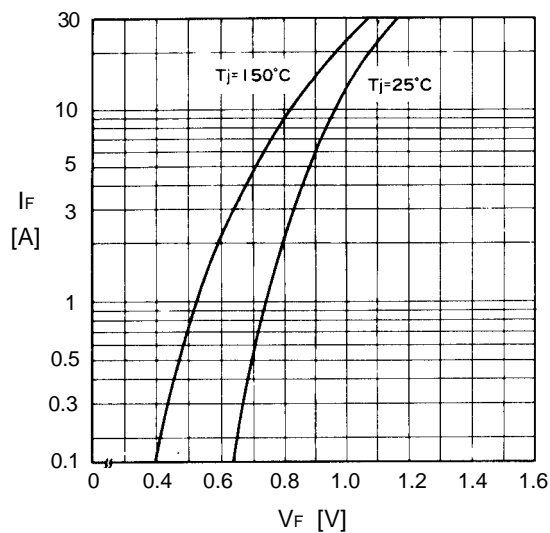


Reverse characteristics

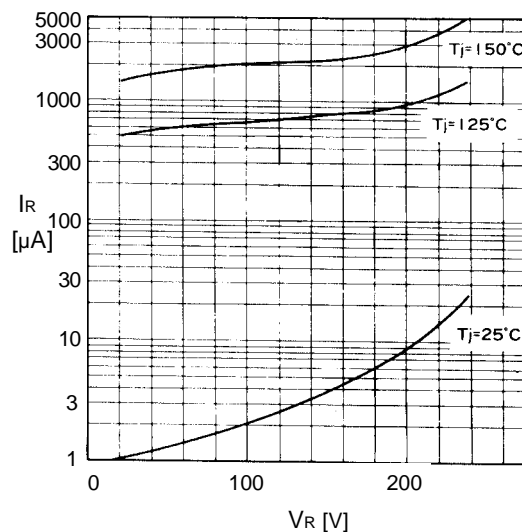


Forward power dissipation

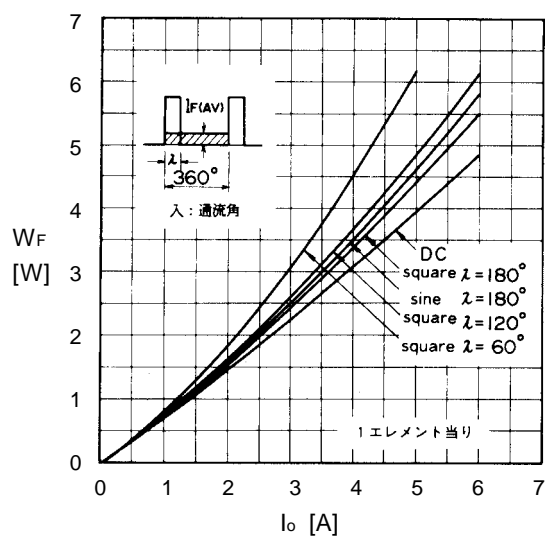

Output current-case temperature

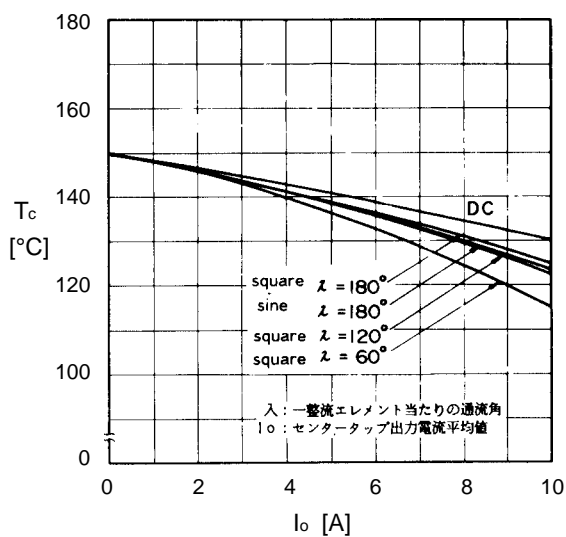

Junction capacitance characteristics

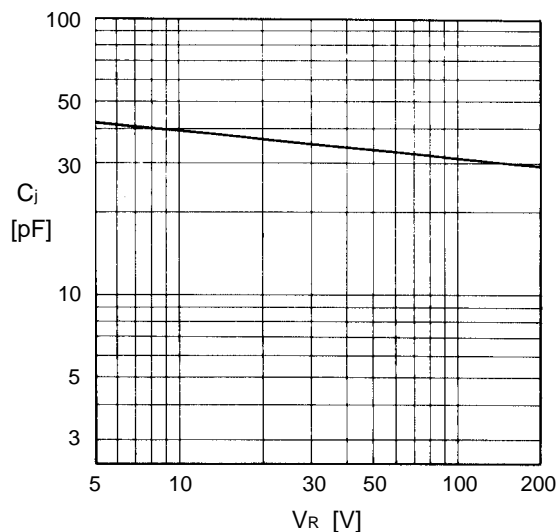

Surge capability

