


POWER RELAY

2 POLE—5 A (MEDIUM LOAD CONTROL)

VB SERIES

■ FEATURES

- UL, CSA, VDE, SEV, SEMKO, FIMKO, IMQ recognized TV-3 rated
- Working class: C
- UL class B (130°C) insulation
- Type of service: continuous duty
- Heavy duty miniature slim type power relay
- High isolation in small package
 - Insulation distance: 8 mm
 - Dielectric strength: 5,000 VAC (between coil and contacts)
 - Surge strength: 10,000 V
- Standard and high sensitivity types available
- Flux free type and plastic sealed type available

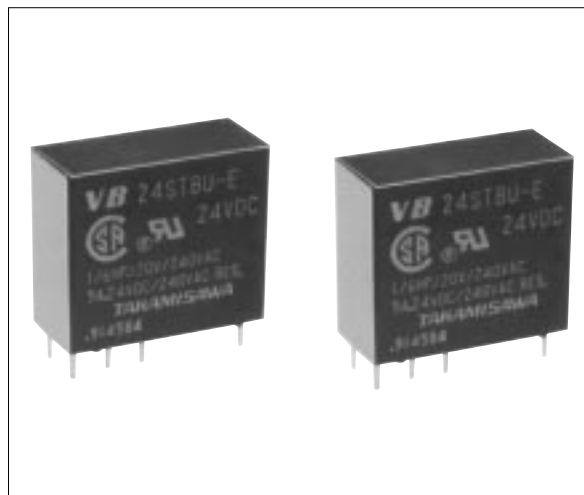

■ ORDERING INFORMATION

[Example] $\frac{VB}{(a)} - \frac{12}{(*)} \frac{S}{(b)} \frac{M}{(c)} \frac{B}{(d)} \frac{U}{(e)} - \frac{5}{(*)} \frac{}{(g)}$

(a)	Series Name	VB: VB Series
(b)	Nominal Voltage	Refer to the COIL DATA CHART
(c)	Coil Type	Nil : Standard type S : High sensitive type (non TV-rating)
(d)	Contact Arrangement	M : 2 form A (DPST-NO) T : 2 form C (DPDT)
(e)	Enclosure	B : Flux free type C : Plastic sealed type (with tape) K : Plastic sealed type
(f)	Standard	Nil : TV-rating U : General (non TV-rating)
(g)	Contact Material	Nil : Silver cadmium oxide (TV-3 rating) 5 : Silver cadmium oxide (non TV-rating) Nil : Gold overlay silver-nickel (non TV-rating) E : Silver-nickel (non TV-rating)

Actual marking omits the hyphen (–) of (*)

■ SAFETY STANDARD AND FILE NUMBERS

UL508, 873 (File No. E56140, E108658)

C 22.2 No. 1, No. 14 (File No. LR35579)

VDE0435, 0630, 0631, 0700, 0860 (File No. 11039-4940-1009)

Please note that UL/CSA ratings may differ from the standard ratings. Please request when the approval markings are required on the cover and/or when a relay recognized by VDE, SEV, SEMKO, FIMKO, IMQ is required.

	Type	Nominal voltage	Contact rating
TV-Rating	VB-() M	3 to 100 VDC	TV-3 120 VAC 1/6HP 120 VAC/240 VAC 5 A 24 VDC/240 VAC resistive 1.9A 250VAC inductive (PF=0.4) Pilot duty C 150
Standard	VB-() () U-() VB-() S () U-()	3 to 100 VDC	1/6HP 120 VAC/240 VAC 5 A 24 VDC/240 VAC resistive 1.9A 250VAC inductive (PF=0.4) Pilot duty C 150

VB SERIES

■ SPECIFICATIONS

Item			TV-3 Rating VB-() M	Standard Type		
				VB-() U-5	VB-() U VB-()-E	
Contact	Arrangement		2 form A (DPST-NO)	2 form A (DPST-NO) or 2 form C (DPDT)		
	Material		Silver-cadmium oxide		Gold overlay silver-nickel (non gold overlay only VB-E)	
	Style		Single			
	Resistance (initial) (at 1 A 6 VDC)		Maximum 200 mΩ		Maximum 100 mΩ	
	Rating (resistive)		5 A 240 VAC/24 VDC			
	Maximum Carrying Current		7 A			
	Maximum Switching Power		1,200 VA, 120 W			
	Maximum Switching Voltage		380 VAC, 150 VDC			
	Maximum Switching Current		5 A			
	Minimum Switching Load *1		100 mA 5 VDC (VB-M, 5, E) 10 mA 5 VDC (VB-)			
	Maximum Inrush Current		51 A 120 VAC (at lamp load)	—		
Coil	Nominal Power (at 20°C)		Standard type: 0.70 to 0.75 W, high sensitivity type: 0.53 W			
	Operate Power (at 20°C)		Standard type: 0.35 to 0.37 W, high sensitivity type: 0.26 W			
	Operating Temperature		Standard type: -40°C to +65°C, high sensitivity type: -40°C to +75°C (no frost)			
Time Value	Operate (at nominal voltage)		Maximum 15 ms			
	Release (at nominal voltage)		Maximum 10 ms			
Insulation	Resistance (at 500 VDC)		Minimum 1,000 MΩ			
	Dielectric Strength	between open contacts	1,000 VAC 1 minute (3000 VAC between adjacent contacts)			
		between coil and contacts*2	5,000 VAC 1 minute			
	Surge Strength*3		10,000 V at(1.2 × 50 μs)			
Life	Mechanical		2 × 10 ⁷ operations minimum			
	Electrical		1 × 10 ⁵ operations minimum at rated load			
			5 × 10 ⁴ operations minimum at motor load (1/8HP 120 VAC)	3 × 10 ⁴ operations minimum at motor load (1/8HP 120 VAC)		
			5 × 10 ⁴ operations minimum at lamp load	—		
Other	Vibration Resistance	Misoperation	10 to 55 Hz (double amplitude of 1.5 mm)			
		Endurance	10 to 55 Hz (double amplitude of 1.5 mm)			
	Shock Resistance	Misoperation	100 m/s ² (11 ± 1 ms)			
		Endurance	1,000 m/s ² (6 ± 1 ms)			
	Weight		Approximately 17 g			

*1 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

*2 IMQ 




*3 IMQ 

COIL DATA CHART





MODEL			Nominal voltage	Coil resistance (10%)	Must operate voltage	Must release voltage	Nominal power
	TV-3 Rating	Standard					
Standard Type	VB- 3M ()	VB- 3 () () U- ()	3 V DC	12.5 Ω	2.1 VDC	0.3 VDC	0.72 W
	VB- 5M ()	VB- 5 () () U- ()	5 V DC	36 Ω	3.5 VDC	0.5 VDC	0.70 W
	VB- 6M ()	VB- 6 () () U- ()	6 V DC	50 Ω	4.2 VDC	0.6 VDC	0.72 W
	VB- 9M ()	VB- 9 () () U- ()	9 V DC	115 Ω	6.3 VDC	0.9 VDC	0.70 W
	VB- 12M ()	VB- 12 () () U- ()	12 V DC	200 Ω	8.4 VDC	1.2 VDC	0.72 W
	VB- 14M ()	VB- 14 () () U- ()	14 V DC	280 Ω	9.8 VDC	1.4 VDC	0.70 W
	VB- 18M ()	VB- 18 () () U- ()	18 V DC	460 Ω	12.6 VDC	1.8 VDC	0.70 W
	VB- 24M ()	VB- 24 () () U- ()	24 V DC	820 Ω	16.8 VDC	2.4 VDC	0.70 W
	VB- 36M ()	VB- 36 () () U- ()	36 V DC	1,850 Ω	25.2 VDC	3.6 VDC	0.70 W
	VB- 48M ()	VB- 48 () () U- ()	48 V DC	3,300 Ω	33.6 VDC	4.8 VDC	0.70 W
	VB- 60M ()	VB- 60 () () U- ()	60 V DC	5,100 Ω	42.0 VDC	6.0 VDC	0.70 W
	VB-100M ()	VB-100 () () U- ()	100 V DC	13,400 Ω	70.0 VDC	10.0 VDC	0.75 W
High Sensitivity Type		VB- 3S () () U- ()	3 V DC	17 Ω	2.1 VDC	0.3 VDC	0.53 W
		VB- 5S () () U- ()	5 V DC	47 Ω	3.5 VDC	0.5 VDC	0.53 W
		VB- 6S () () U- ()	6 V DC	68 Ω	4.2 VDC	0.6 VDC	0.53 W
		VB- 9S () () U- ()	9 V DC	155 Ω	6.3 VDC	0.9 VDC	0.53 W
		VB-12S () () U- ()	12 V DC	270 Ω	8.4 VDC	1.2 VDC	0.53 W
		VB-14S () () U- ()	14 V DC	370 Ω	9.8 VDC	1.4 VDC	0.53 W
		VB-18S () () U- ()	18 V DC	610 Ω	12.6 VDC	1.8 VDC	0.53 W
		VB-24S () () U- ()	24 V DC	1,100 Ω	16.8 VDC	2.4 VDC	0.53 W
		VB-36S () () U- ()	36 V DC	2,450 Ω	25.2 VDC	3.6 VDC	0.53 W
		VB-48S () () U- ()	48 V DC	4,400 Ω	33.6 VDC	4.8 VDC	0.53 W
		VB-60S () () U- ()	60 V DC	6,800 Ω	42.0 VDC	6.0 VDC	0.53 W
		VB-100S () () U- ()	100 V DC	18,860 Ω	70.0 VDC	10.0 VDC	0.53 W

Note: All values in the table are measured at 20 °C.







CHARACTERISTIC DATA

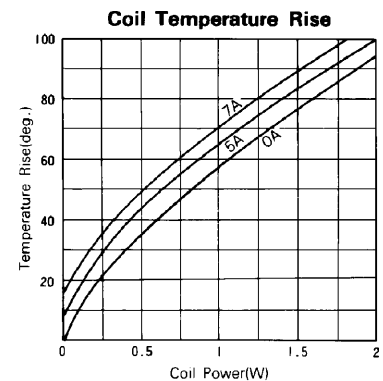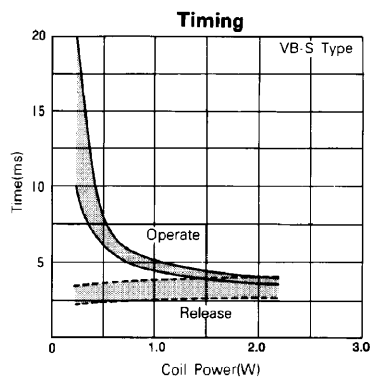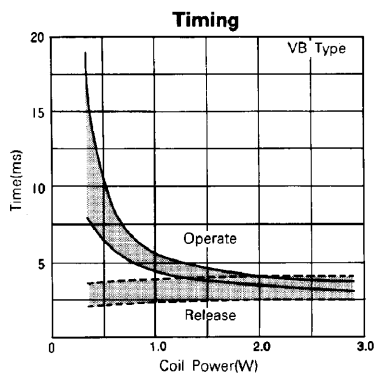

VB SERIES

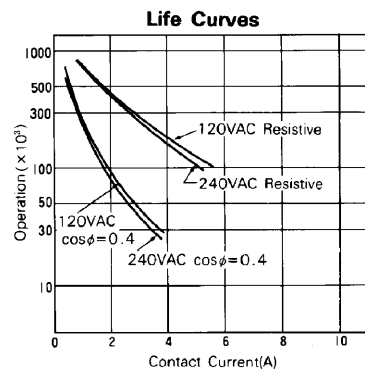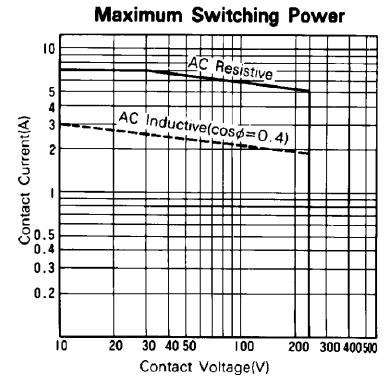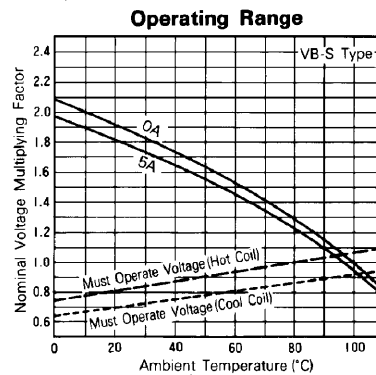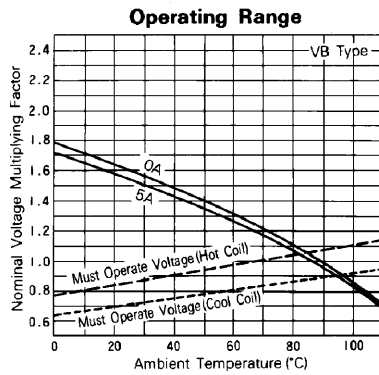

REFERENCE DATA

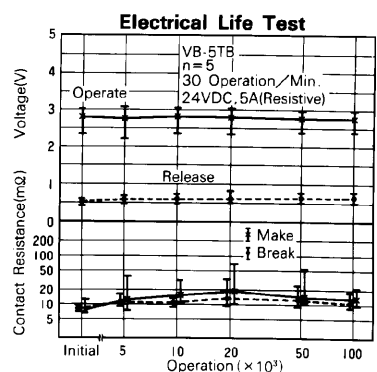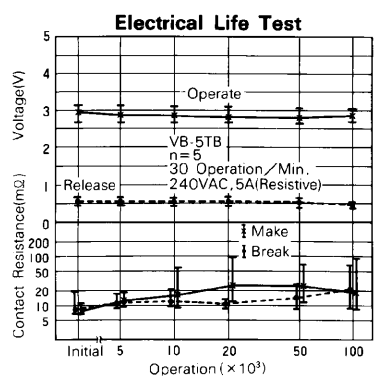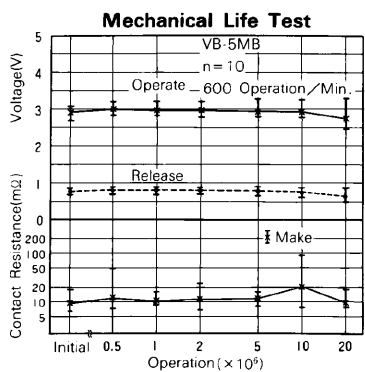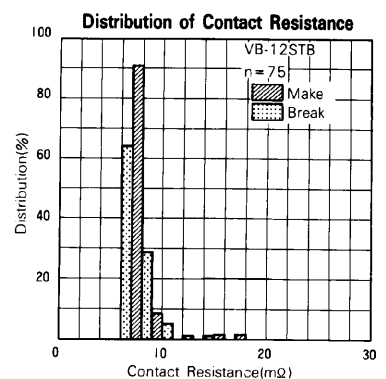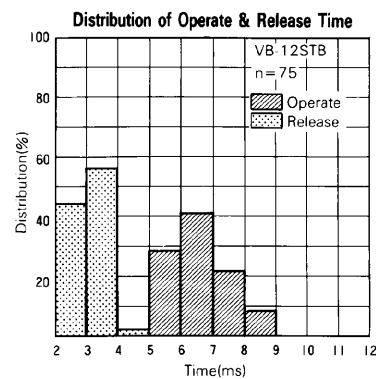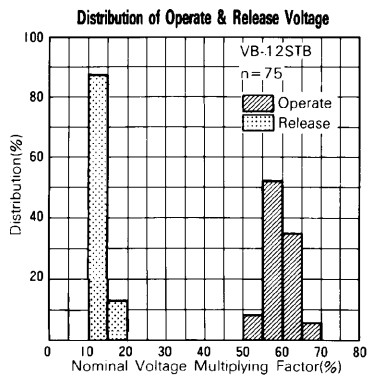


VB SERIES

■ DIMENSIONS


● Dimensions

VB-M type

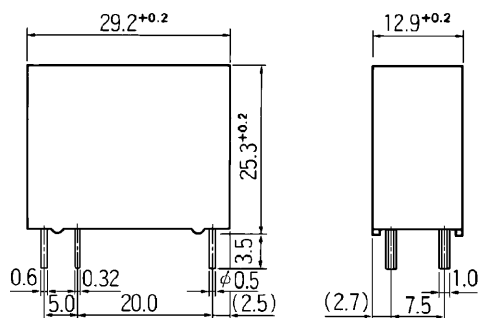

● Schematics


(BOTTOM VIEW)






● PC board mounting

hole layout




(BOTTOM VIEW)






VB type

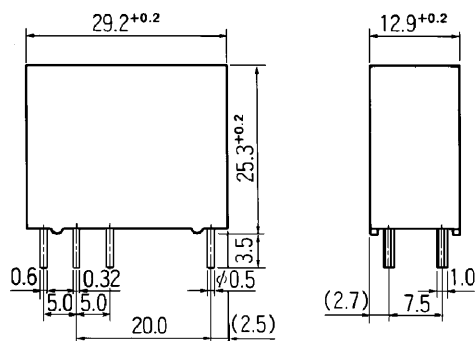

VB-MK type (Plastic sealed type)

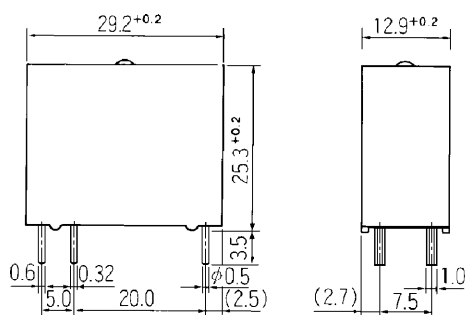


VB-K type (Plastic sealed type)

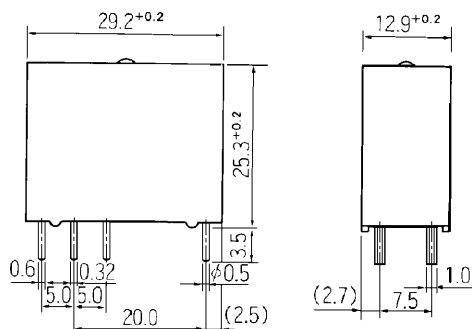


Unit: mm

VB-MC type (Plastic sealed type with tape)

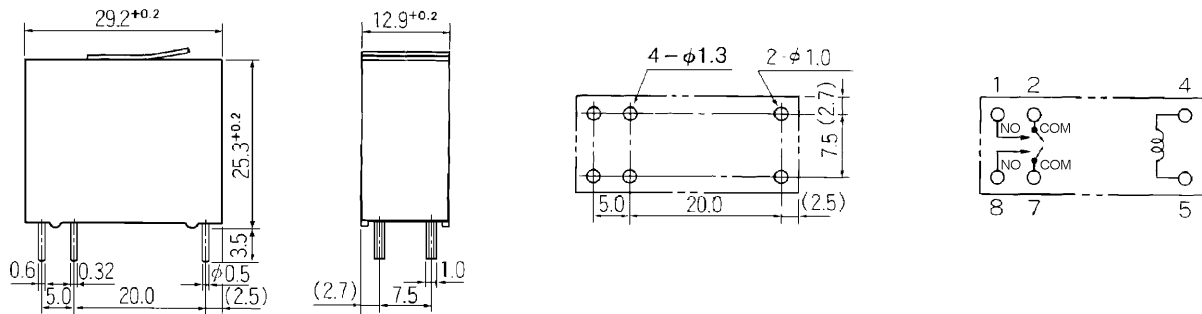

VB-C type (Plastic sealed type with tape)

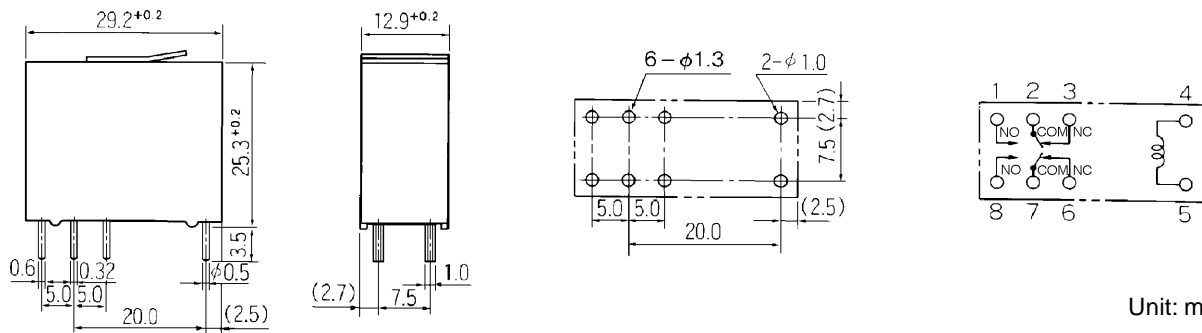

Unit: mm

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: marcom@fcai.fujitsu.com
Web: www.fcai.fujitsu.com

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: www.fceu.fujitsu.com

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#04-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
www.fcal.fujitsu.com

© 2003 Fujitsu Components America, Inc. All company and product names are trademarks or registered trademarks of their respective owners. Rev. 02/18/2003