

UMIL 60

60 Watts, 28 Volts, Class AB

Defcom 225 - 400 MHz

GENERAL DESCRIPTION

The UMIL60 is a double input matched COMMON EMITTER broadband transistor specifically intended for use in the 225-400 MHz frequency band. It may be operated in Class AB or C. Gold metallization and silicon diffused resistors ensure ruggedness and high reliability.

ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25°C 140 Watts


Maximum Voltage and Current

BVces	Collector to Emitter Voltage	60 Volts
BVebo	Emitter to Base Voltage	4.0 Volts
Ic	Collector Current	8.0 A

Maximum Temperatures

Storage Temperature	- 65 to +150°C
Operating Junction Temperature	+150°C

CASE OUTLINE 55HW, Style 2

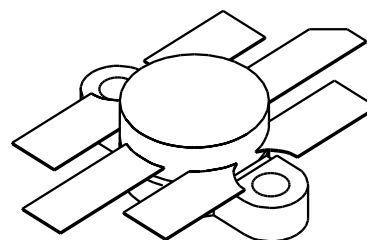

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Output	F = 400 MHz	60			Watts
Pin	Power Input	Vcc = 28 Volts			8	Watts
Pg	Power Gain		8.8	9.0		dB
η_c	Efficiency			60		%
VSWR	Load Mismatch Tolerance				5:1	


BVebo	Emitter to Base Breakdown	Ie = 5 mA	4.0			Volts
BVces	Collector to Emitter Breakdown	Ic = 50 mA	60			Volts
BVceo	Collector to Emitter Breakdown	Ie = 50 mA	33			Volts
Cob	Output Capacitance	Vcb = 28 V, F = 1 MHz			75	pF
hFE	DC - Current Gain	Vce = 5 V, Ic = 2 A	10			
θ_{jc}	Thermal Resistance				.65	°C/W

Issue August 1996

GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHz RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.


GHz Technology Inc. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 Tel. 408 / 986-8031 Fax 408 / 986-8120

DC SAFE OPERATING AREA

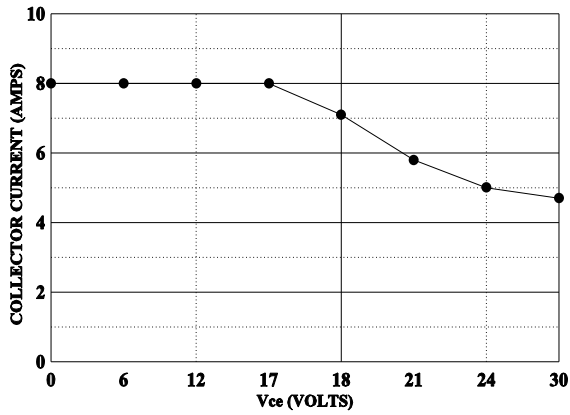


POWER OUTPUT vs POWER INPUT

Vcc= 28V f=400MHz

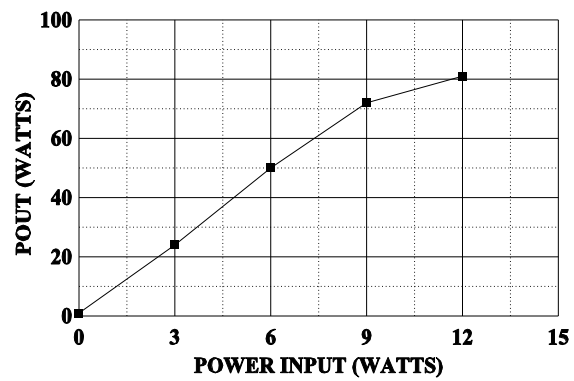

POWER GAIN VS FREQUENCY

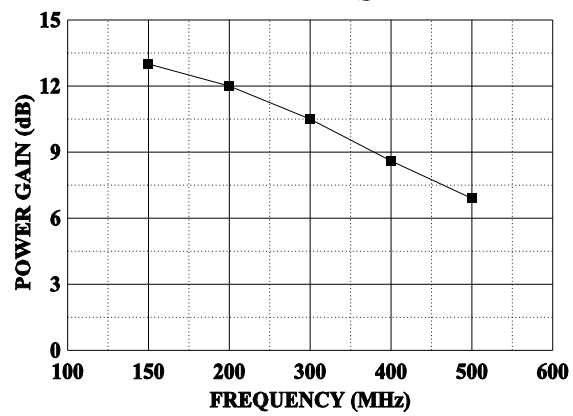

SMITH CHART UMIL60

NORMALIZED IMPEDANCE AND ADMITTANCE COORDINATES

