


MR3 Reflector Lamp Assemblies

Line No.	Part No.	Volts	Amps	M.S.C.P.	Life Hours	Filament Type	Vacuum or Gas	Reflector Finish	Drawing
1	1150-3	5.0	0.115	.150	40,000	CC-6	V	Polished Aluminum	A
2	1088-3	5.0	0.140	.200	18,000	CC-6	V	Polished Aluminum	A


Part number includes lamp, reflector, mounting clip and two 2-56 UNC mounting screws.

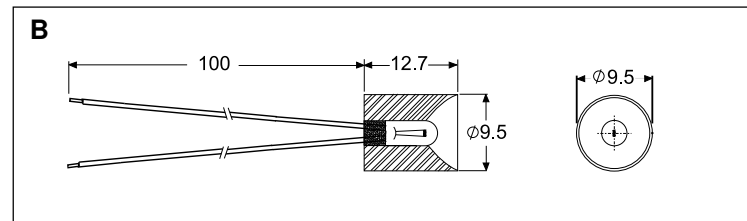

MR3 Reflector Lamp Assemblies

Line No.	Part No.	Volts	Amps	M.S.C.P.	Life Hours	Filament Type	Vacuum or Gas	Reflector Finish	Drawing
3	MR3-4115	5.0	0.115	.150	40,000	CC-6	V	Polished Aluminum	B
4	MR3-1600	5.0	0.060	.050	100,000	CC-6	V	Polished Aluminum	B
5	MR3-1150	5.0	0.115	.150	40,000	CC-6	V	Polished Aluminum	B
6	MR3-1088	5.0	0.140	.200	18,000	CC-6	V	Polished Aluminum	B
7	MR3-1089	5.0	0.150	.350	5,000	CC-6	V	Polished Aluminum	B


These assemblies are also available with Gold Coated Reflector, Ellipsoidal Reflector or Custom Lead Length.

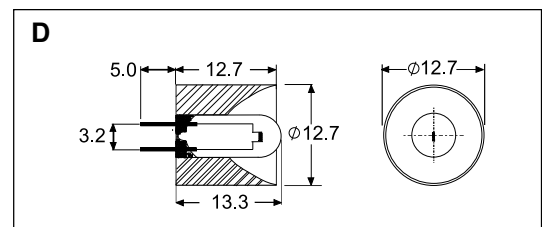

MR4 Reflector Lamp Assemblies

Line No.	Part No.	Volts	Amps	M.S.C.P.	Life Hours	Filament Type	Vacuum or Gas	Reflector Finish	Drawing
13	MR4-187	4.2	1.05	3.98	650	C-6	G	Polished Aluminum	D
14	MR4-188	5.0	1.00	3.34	10,000	C-6	G	Polished Aluminum	D


These assemblies are also available with Gold Coated Reflector, Ellipsoidal Reflector or Custom Lead Length.

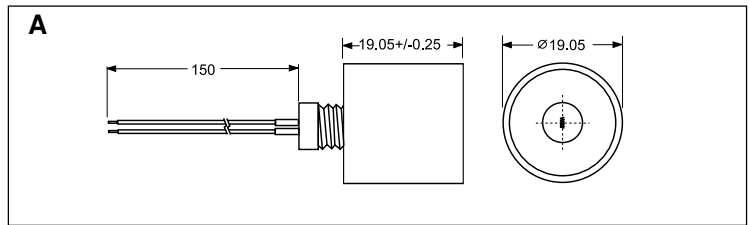

MR6 Reflector Lamp Assemblies

Line No.	Part No.	Volts	Amps	M.S.C.P.	Life Hours	Filament Type	Vacuum or Gas	Reflector Finish	Drawing
1	MR6-187	4.2	1.05	3.98	650	C-6	G	Polished Aluminum	A
2	MR6-188	5.0	1.0	3.34	10,000	C-6	G	Polished Aluminum	A
3	MR6-288	6.0	1.0	7.96	100	C-6	G	Polished Aluminum	A

These assemblies are also available with Gold Coated Reflector, Ellipsoidal Reflector or Custom Lead Length.

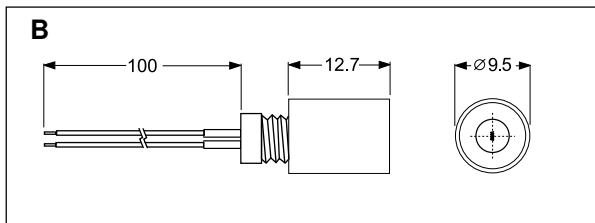

Adjustable Focus Reflector Assemblies

Line No.	Part No.	Reflector Finish	Drawing
4	MR3-K	Polished Aluminum	B
5	MR3G-K	Gold Coated	B

• Threaded lamp holder and reflector allow for easy customization of focal distance.

• Adjustable beam from parallel beam to fully focused.

• Holder will accommodate any lamp with 1.27mm pin spacing.

• Gold Coated Reflector Assembly offers improved infrared output from 0.6 to 4.5 microns.



Custom Reflector Assemblies

Gilway reflector assemblies can be customized to better fit your application. Please contact us with your unique requirements.