


Si PIN photodiode S7797, S5052, S8255, S5573

φ3 mm lens plastic package

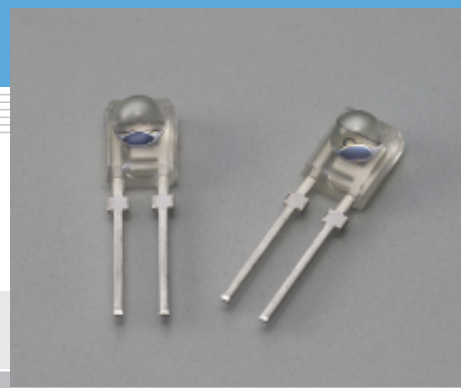

These Si PIN photodiodes are molded into to a clear plastic package with a φ3 mm lens. To meet your application, various types are available with different time response characteristics.

Features

- Clear plastic package with φ3 mm lens
- High-speed response
S7797: 500 MHz Typ. ($V_R=2.5$ V)
S5052: 500 MHz Typ. ($V_R=5$ V)
S8255: 200 MHz Typ. ($V_R=5$ V)
S5573: 80 MHz Typ. ($V_R=5$ V)

Applications

- Laser diode monitor in optical disk drive (high-speed APC)
- Spatial light transmission

General ratings / Absolute maximum ratings

Type No.	Package (mm)	Active area size (mm)	Effective active area (mm ²)	Absolute maximum ratings			
				Reverse voltage V_R Max. (V)	Power dissipation P (mW)	Operating temperature T _{opr} (°C)	Storage temperature T _{stg} (°C)
S7797	Plastic package with lens	φ3.0	7.0	20	50	-25 to +85	-40 to +100
S5052							
S8255							
S5573							


Electrical and optical characteristics (Typ. T_a=25 °C, unless otherwise noted)

Type No.	Spectral response range λ (nm)	Peak sensitivity wavelength λ_p (nm)	Photo sensitivity S (A/W)				Short circuit current Isc 100 lx 2856 K (μ A)	Dark current Id (nA)		Temp. coefficient of Id TCId (times/°C)	Cut-off frequency fc RL=50 Ω -3dB (MHz)	Terminal capacitance Ct f=1 MHz (pF)	NEP (W/Hz ^{1/2})
			λ_p	660 nm	780 nm	830 nm		Typ.	Max.				
S7797	320 to 1000	760	0.52	0.48	0.51	0.48	2.8	0.01 *1	0.3 *1	1.15	500 *1	6 *1	3.4 × 10 ⁻¹⁵ *1
S5052		800	0.46	0.4	0.45	0.45		0.02 *2	0.3 *2		500 *2	4 *2	5.5 × 10 ⁻¹⁵ *2
S8255	320 to 1060	900	0.53	0.4	0.48	0.5	4.0	0.01 *2	1 *2		200 *2	3 *2	3.4 × 10 ⁻¹⁵ *2
S5573							4.5	0.025 *2	1 *2		80 *2		5.3 × 10 ⁻¹⁵ *2

*1: $V_R=2.5$ V


*2: $V_R=5$ V

- Spectral response

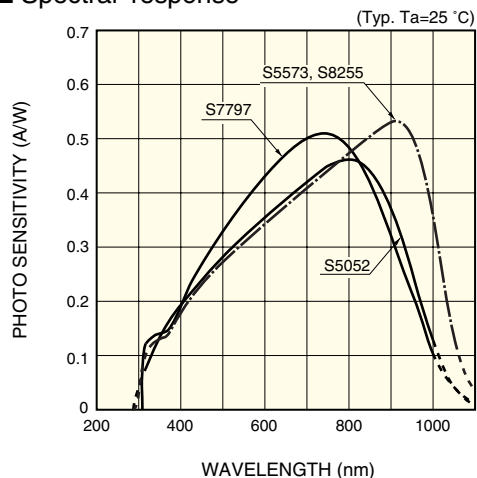


KPINR0176EA

■ Dark current vs. ambient temperature

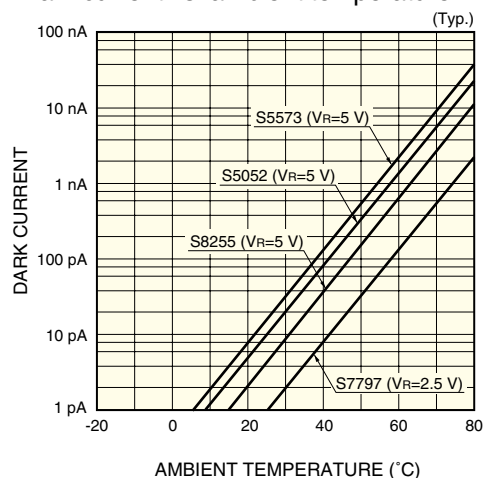


KPINB0178FA

■ Directivity

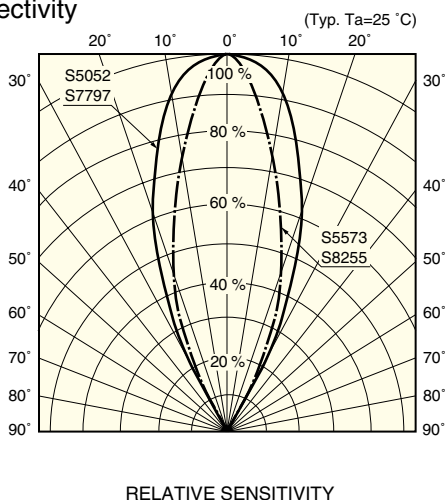


KPINR0180FA

■ Dark current vs. reverse voltage

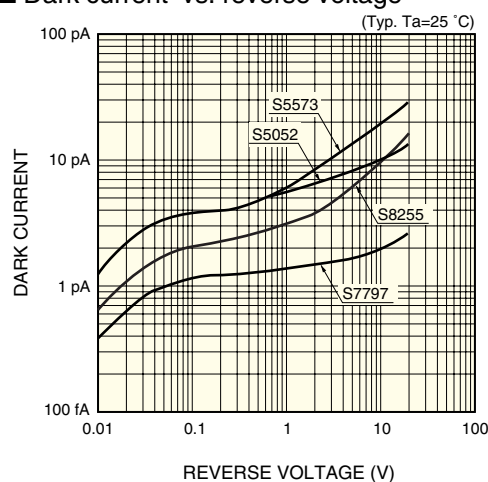

KRINB0177EA


■ Terminal capacitance vs. reverse voltage

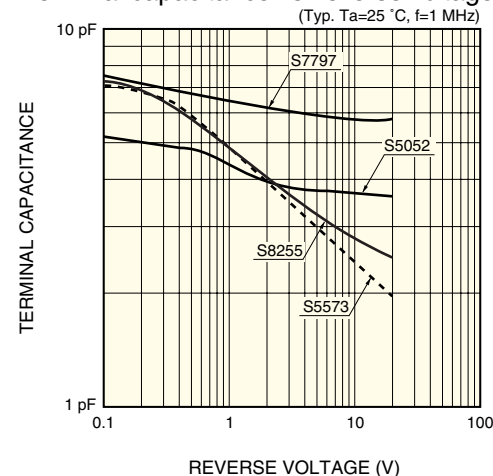

KPINR0179EA

■ Dimensional outline

(unit: mm, tolerance unless otherwise noted: ± 0.1)

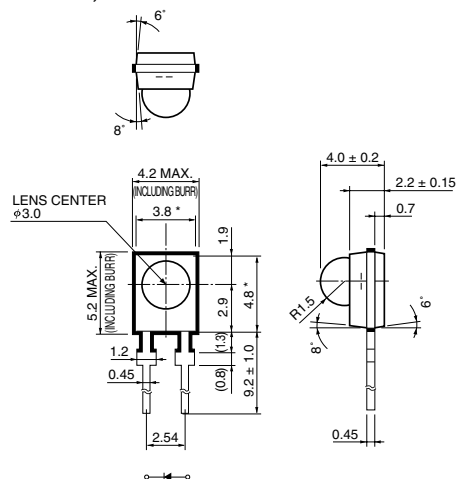

Chip position accuracy with respect to the package dimension marked *

X, Y $\leq \pm 0.2$

$\theta \leq 2^\circ$

KPINA0032EA