



LED SPECIFICATION



ATTENTION

OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES


330MR2C

➤ Features:

- Single color
- High bright output
- Low power consumption
- High reliability and long life

➤ Descriptions:


- Dice material: AlGaInP
- Emitting Color: Super Bright Red
- Device Outline: ϕ 3mm Round Type
- Lens Type: Water Clear

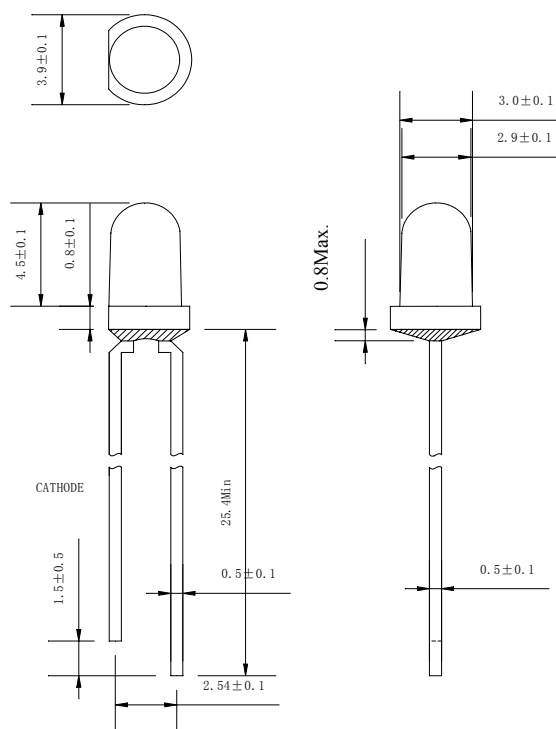

➤ Directivity:

All dimensions are millimeters.

Tolerance is $\pm 0.25 \text{ mm}$ unless otherwise noted.

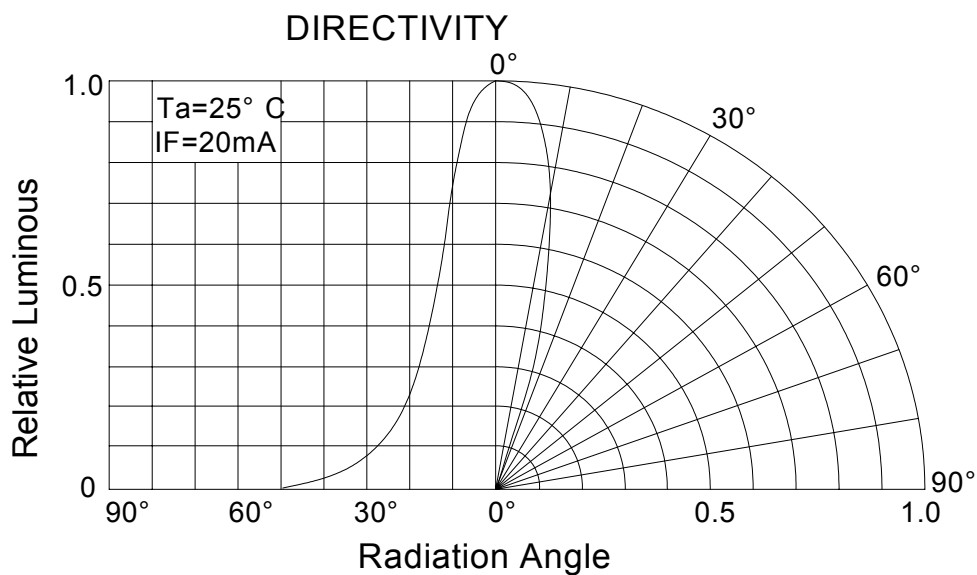



LED SPECIFICATION

330MR2C

➤ Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Test Condition	Values		Unit
			Min.	Max.	
Reverse Voltage	V _R	I _R = 30 μA	5	--	V
Forward Current	I _F	----		30	mA
Power Dissipation	P _d	----		75	mW
Pulse Current	I _{peak}	Duty=0.1mS, 1kHz	----	100	mA
Operating Temperature	T _{opr}	----	-20	+85	°C
Storage Temperature	T _{str}	----	-25	+100	°C

➤ Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Test Condition	Values			Unit
			Min.	Typ.	Max.	
Forward Voltage	V _F	I _F =20mA		2.0	2.5	V
Reverse Current	I _R	V _R =5V	----	----	30	μA
Dominate Wavelength	λ _d	I _F =20mA		624	----	nm
Peak Wavelength	λ _p	I _F =20mA		632	----	nm
Spectral Line half-width	Δλ	I _F =20mA	----	20	----	nm
Luminous Intensity	I _v	I _F =20mA		BIN	----	mcd
Viewing Angle	2θ _{1/2}	I _F =20mA	24.....27.....30	deg.

Luminous Intensity Bins (Ta = 25°C)

Unit:mcd

Bin	S	T	U	V	W
Min	770	1100	1520	2130	3000
Max	1100	1520	2130	3000	4180

➤ Dominate Wavelength Bins Unit:nm

Bin	R2	R3
Min	621	624
Max	624	627

➤ **Typical electrical/optical characteristic curves/光电特性曲线:**

Fig.1 正向电流 Vs. 正向电压

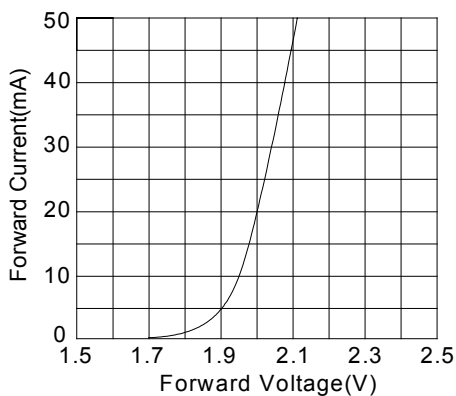


Fig.2 相对亮度 Vs. 正向电流

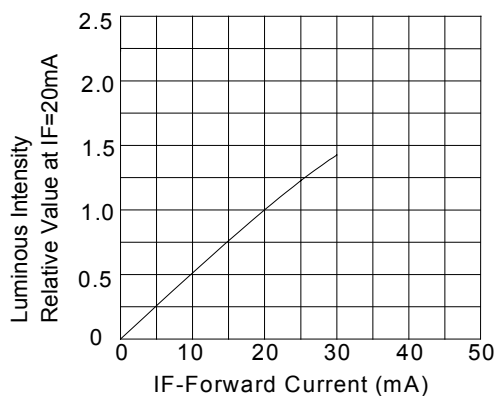


Fig.3 正向电流 Vs. 环境温度

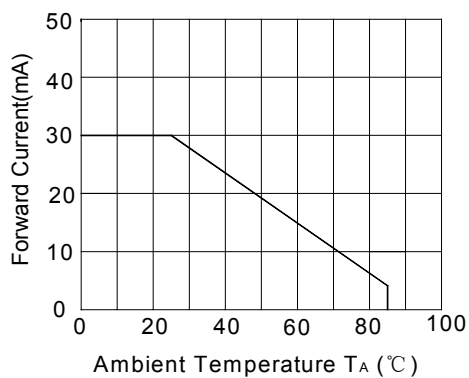


Fig.4 相对亮度 Vs. 环境温度

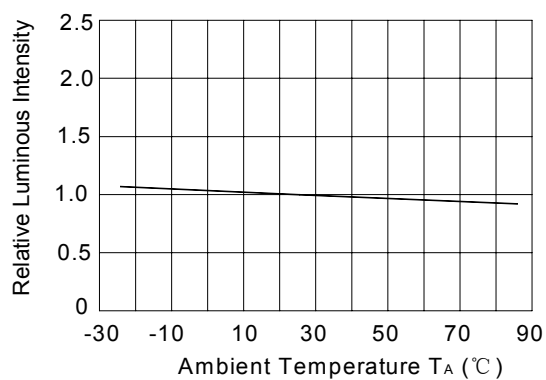


Fig.5 辐射强度 Vs. 波长

