

# 4mm SQUARE THIN TYPE ISOLATOR

**MODEL**   **ESI-4AF** **[ ]** **2.017** **G** **01** - **T**

(1)   (2)   (3)   (4)   (5)   (6)

(1) Series ESI-4AF ; 1.6 +/-0.1mm Height


(2) Rotating Direction (R or L)

(3) Center Frequency

(4) G ; GHz

(5) Control No.

(6) T ; Taping  
Blank ; Bulk

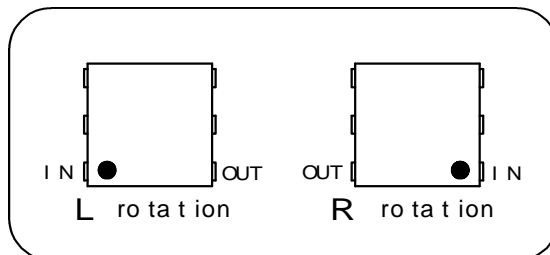


## Specification

Frequency (GHz)	Ins. Loss Max. (dB)	Isolation Min. (dB)	V.S.W.R. Max.	Attenuation		Handling Power Max. (W)	Reflection Power Max. (W)
				at 2f Min. (dB)	at 3f Min. (dB)		
2.010-2.025	0.50	15	1.5	10	15	5.0	1.0

Operating Temperature(deg.C) ; -35 to +85

Impedance ; 50 ohms Typ.

## Shape & Size

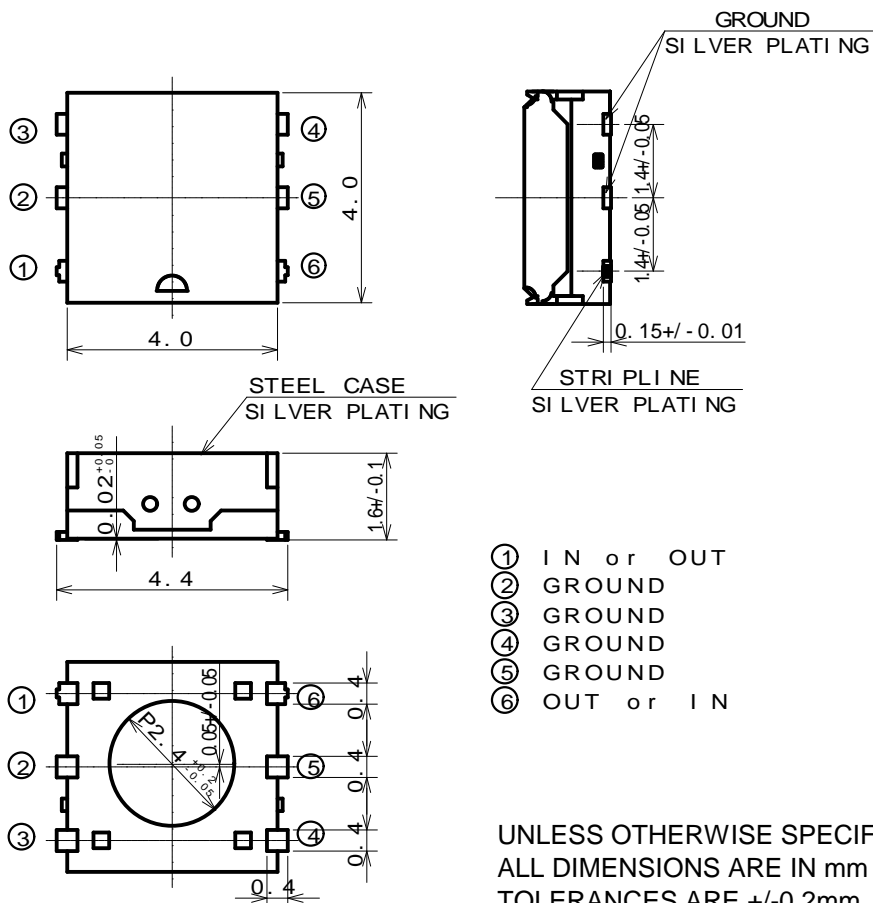

TBE091



Hitachi Metals, Ltd. Tottori Works