


# 5mm SQUARE THIN TYPE ISOLATOR

**MODEL**      **ESI-5** **[ ]** **2.140** **G - T**  
                          (1)        (2)        (3)        (4)        (5)

- (1) 5mm Square Lumped Element Isolator  
(2) Rotating Direction (R or L)  
(3) Center Frequency  
(4) G ; GHz  
(5) T ; Taping  
Blank ; Bulk

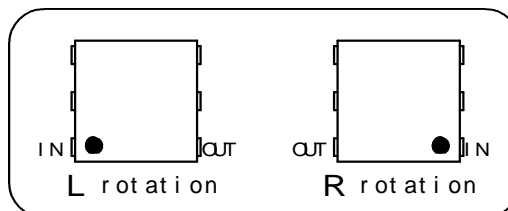


## Specification

Frequency (GHz)	Ins. Loss Max. (dB)	Isolation Min. (dB)	V.S.W.R. Max.	2f Min. (dB)	3f Min. (dB)	Handling Power Max. (W)	Reflection Power Max. (W)
2.110-2.170	0.60	15	1.5	6.0	—	5.0	1.0

Operating Temperature(deg.C) ; -35 to +85  
Impedance ; 50 ohms Typ.

## Shape & Size

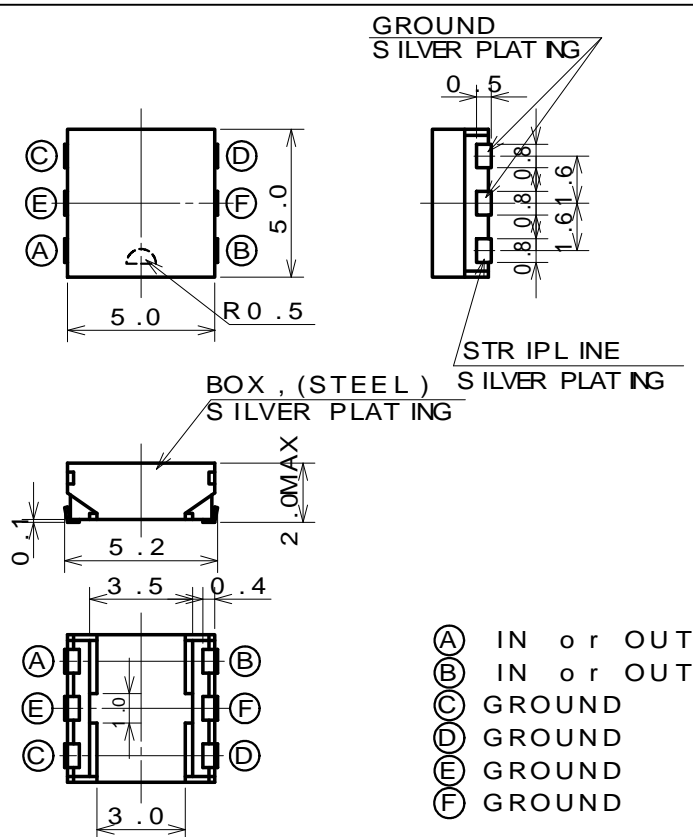

Weight;0.2g

TOLERANCE ;+ / -0 .2mm  
UN IT ; (mm )

TAE796