

P/N	ESLB-P245BA- []	DATE.	'04- 11- 4
DWN.	M.Uchida	DATA-No.	2MT44376

2.4-2.5GHz Band Chip Multilayer Band Pass Filter

ESLB-P245BA-[]

BPF with Balun


Ver.C

CONFIDENTIAL

The contents of this document is the property of Hitachi Metals Ltd. and may not be communicated to any other party in any form without the prior written contents of Hitachi Metals Ltd..


Shape and Size

Unit (mm)

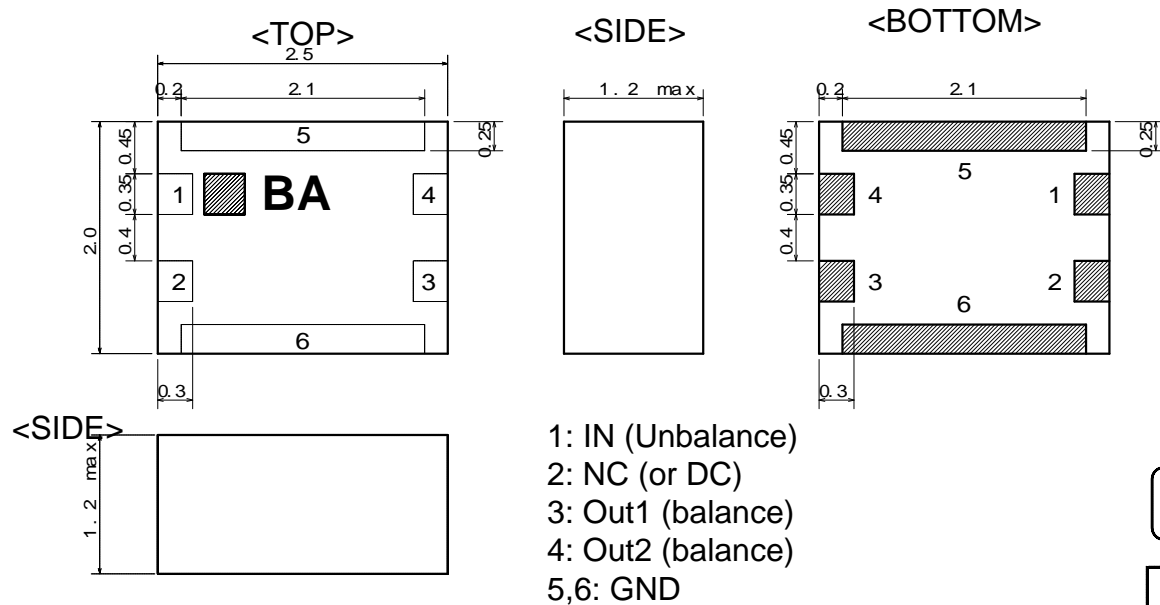

Foot Pattern

Unit (mm)

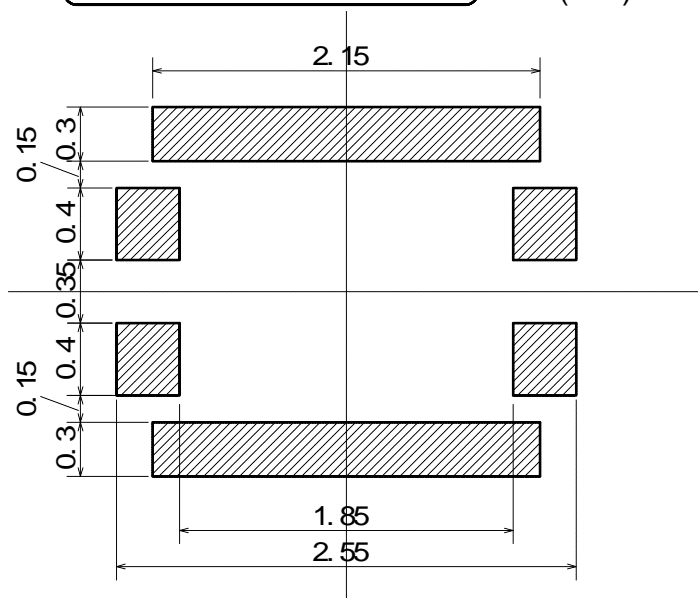






Specification

Parameter	Unit	
Center Frequency(f_0)	MHz	2450
Passband Width	MHz	$f_0 \pm 50$
Insertion Loss	dB	3.5 max
Input Ret.Loss	dB	10 min
Attenuation1 (at 824-960MHz)	dB	50 min
Attenuation2 (at 1710-1990MHz)	dB	35 min
Phase balance	deg.	180 \pm 10
Amplitude balance	dB	1.0 max
Impedance ratio	Ohm	50:50 or 50:100
ESLB-P245BA-1		50:50
ESLB-P245BA-2		50:100

ESLB-P245BA-1 sample DATA

Data-No.2MT44376

(Impedance ratio 50:50)

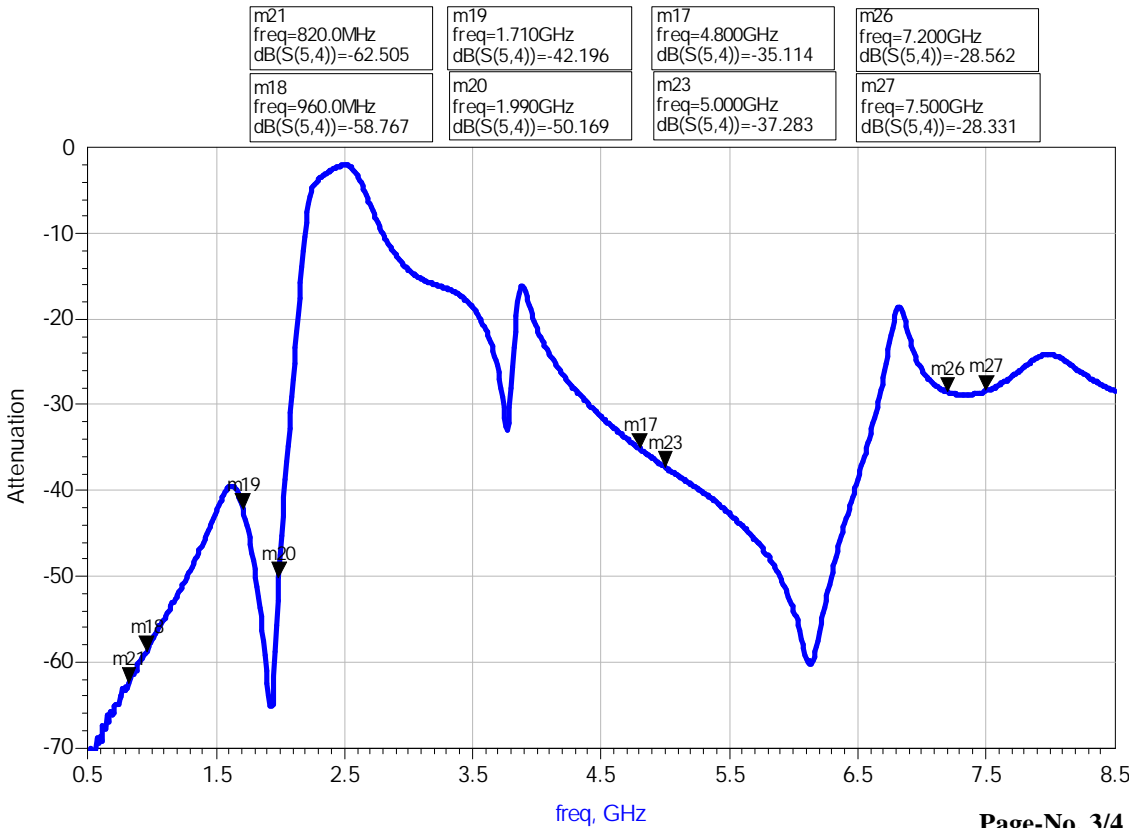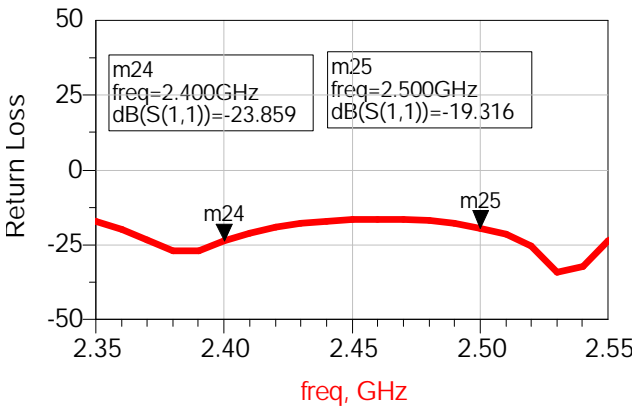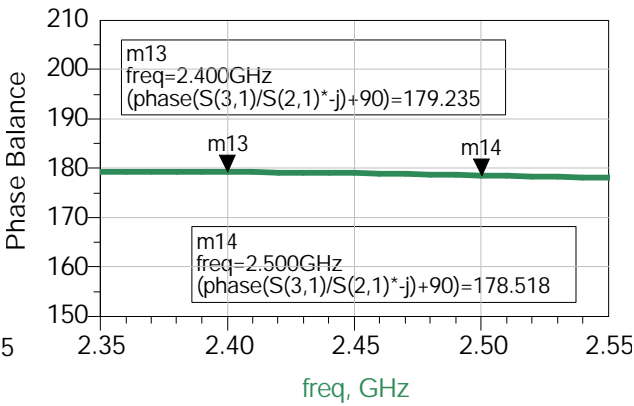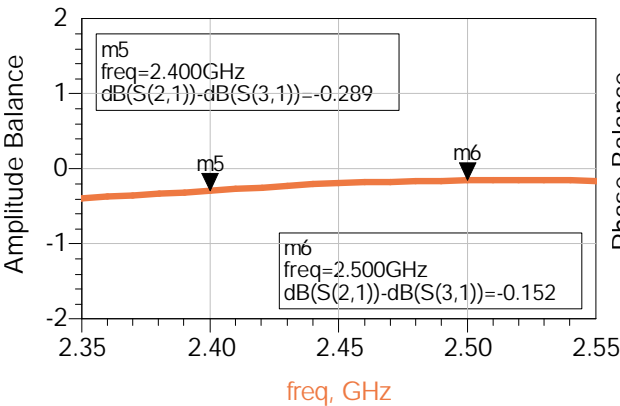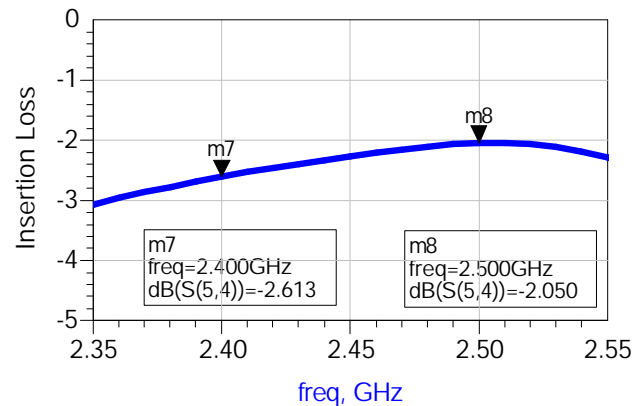

ESLB-P245BA-2 sample DATA

Data-No.2MT44376

(Impedance ratio 50:100)

