

# 3216 Size

## Chip Multilayer Diplexer for CELL/PCS


# FSLF-080ML

All the technical data and information contained  
herein are subject to change without notice.








**LF-FSLF-080ML-0407A**

## Shape & Size

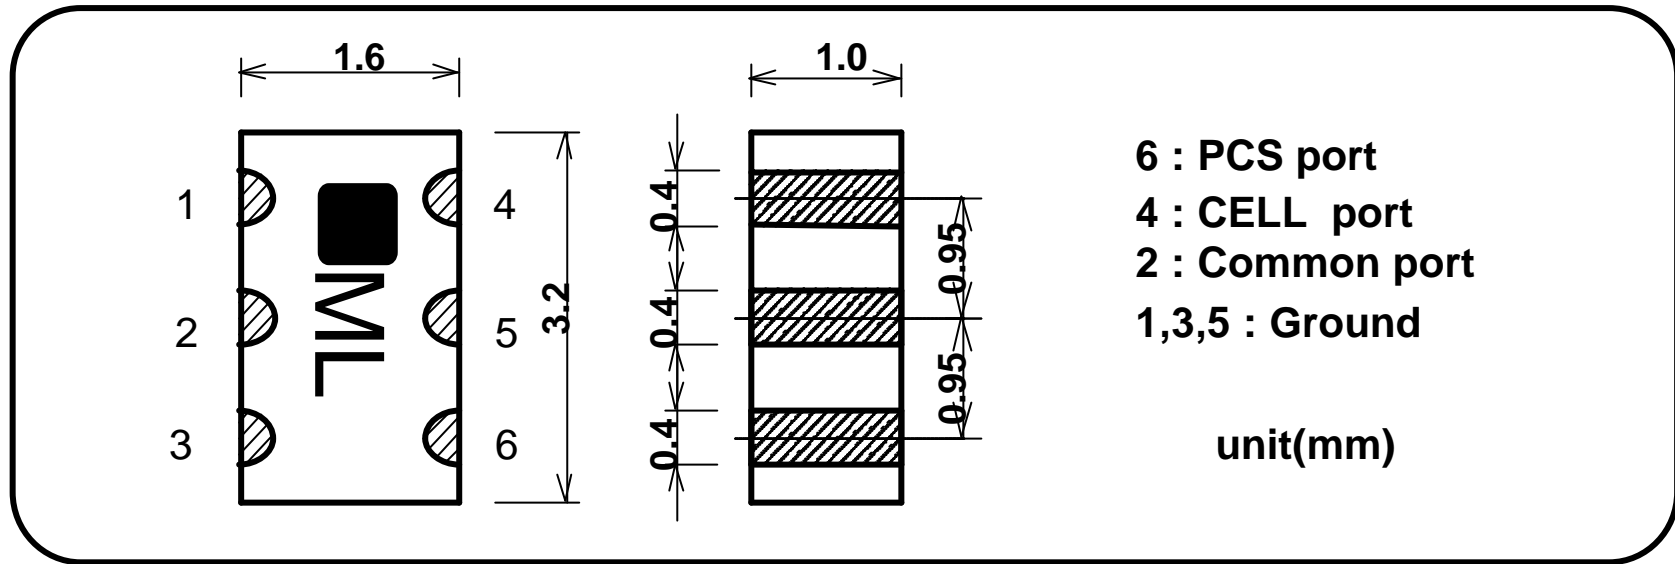

## Specifications


Frequency Range	f1:824-894MHz	Attenuation in f2 AMPS <=>Common	18 dB Min.
	f2:1850-1990MHz		
Insertion Loss in f1 AMPS <=>Common	0.4dB Max.(at +25deg) 0.5dB Max.(at -35to+85deg)	Attenuation in f1 PCS <=>Common	20 dB Min.
Insertion Loss in f2 PCS <=>Common	0.55 dB Max.(at +25deg) 0.65dB Max.(at -35to+85deg)	Power Capacity	3W Max.
		Temperature Range	-35to+85deg
Return Loss (all port)	12 dB Min.		

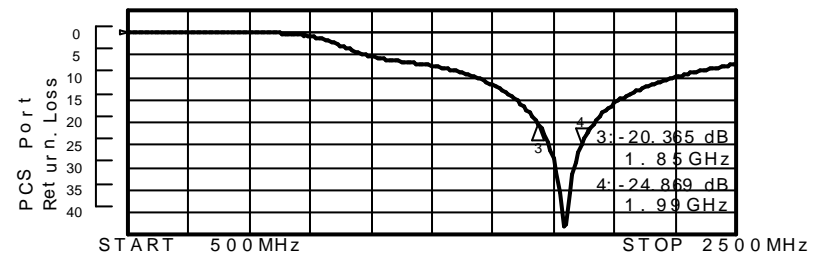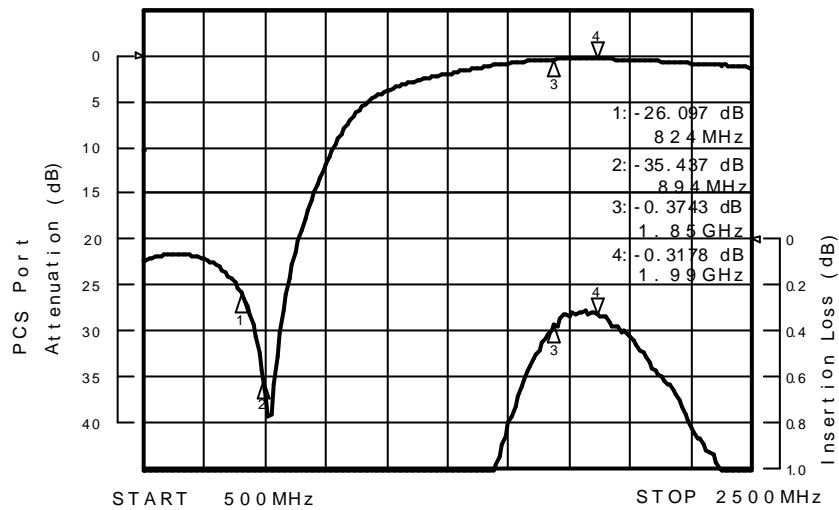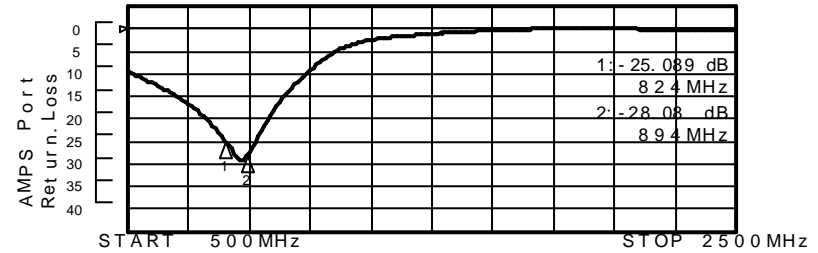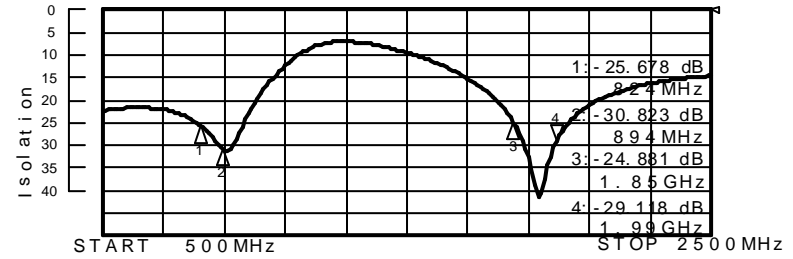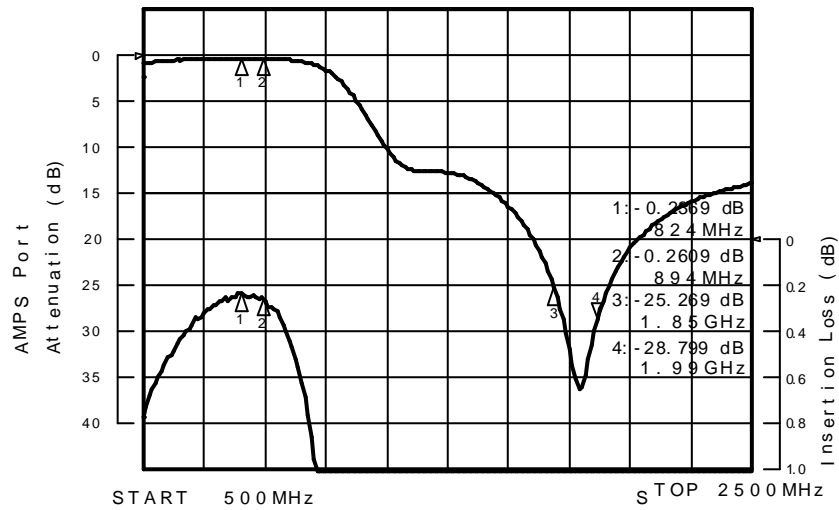

All the technical data and information contained herein are subject to change without notice.

LF-FSLF-080ML-0407A

## Foot Pattern

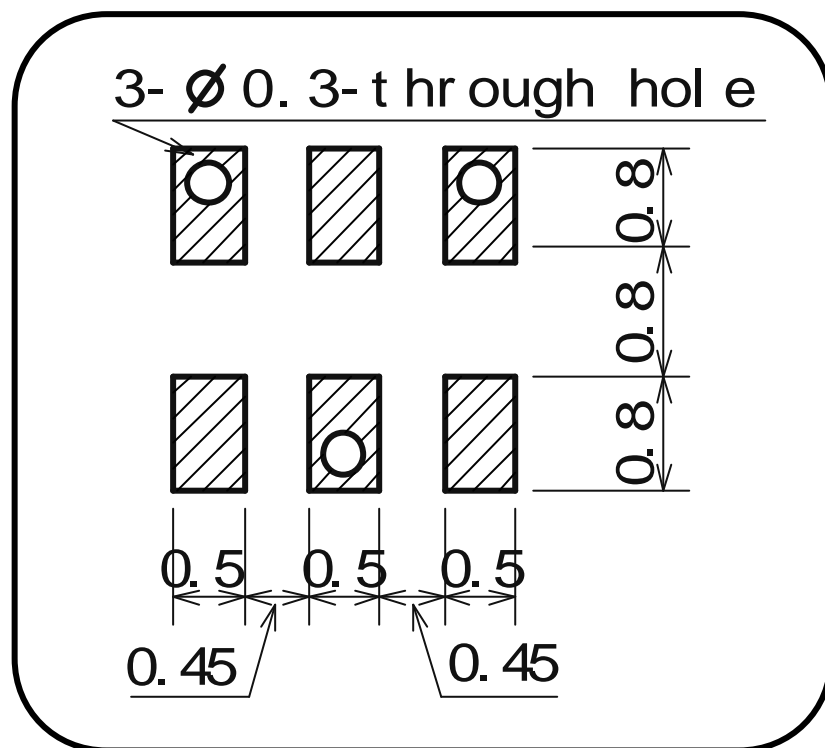

## Foot Pattern Example

