

High Power Differential Line Driver



The EL1503A ADSL Line Driver contains two wideband high-voltage drivers which are ideally suited for both

ADSL and HDSL2 applications. They can supply a 39.2V_{P-P} signal into a 22Ω load while exhibiting very low distortion. The EL1503A also has a number of power saving features. The I_{ADJ} pin can be used to set the maximum supply current and the C₀ and C₁ pins can be used to digitally vary the supply current to one of four modes. These modes include full power, low power, terminate only and power down.

The EL1503A uses current-feedback type amplifiers, which achieve a high slew rate while consuming moderate power. They retain their frequency response over a wide range of externally set gains. The EL1503A operates on ±5V to ±12V supplies and consumes only 12.5mA per amplifier.

The device is supplied in a thermally-enhanced 20-pin SO (0.300"), a thermally-enhanced 16-pin SO (0.150"), and the small footprint (4x5mm) 24-pin LPP packages. Center pins on each side of the 20-pin and 16-pin packages are used as ground connections and heat spreaders. The LPP package has the potential for a low θ_{JA} (<40°C/W) and dissipates heat by means of a thermal pad that is soldered onto the PCB. All package options are specified for operation over the full -40°C to +85°C temperature range.

Features

- High power ADSL driver
- 39.2V_{P-P} differential output drive into 22Ω
- 42.4V_{P-P} differential output drive into 65Ω
- Driver 2nd/3rd harmonics of -66dBc/-72dBc at 2V_{P-P} into 100Ω differential
- Supply current of 12.5mA per amplifier
- Supply current control
- Power saving modes
- Standard surface-mount packages
- Ultra-small LPP package

Applications




- ADSL line drivers
- HDSL2 line drivers
- Video distribution amplifiers

Ordering Information

| PART NUMBER | PACKAGE | TAPE & REEL | PKG. NO. |
|---------------|--------------------|-------------|----------|
| EL1503ACM | 20-Pin SO (0.300") | - | MDP0027 |
| EL1503ACM-T13 | 20-Pin SO (0.300") | 13" | MDP0027 |
| EL1503ACL | 24-Pin LPP | - | MDP0046 |
| EL1503ACL-T7 | 24-Pin LPP | 7" | MDP0046 |
| EL1503ACL-T13 | 24-Pin LPP | 13" | MDP0046 |
| EL1503ACS | 16-Pin SO (0.150") | - | MDP0027 |
| EL1503ACS-T7 | 16-Pin SO (0.150") | 7" | MDP0027 |
| EL1503AC-T13 | 16-Pin SO (0.150") | 13" | MDP0027 |

Get FULL DATASHEET

Pinouts

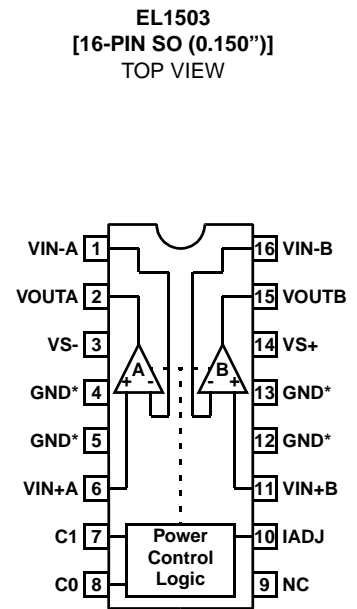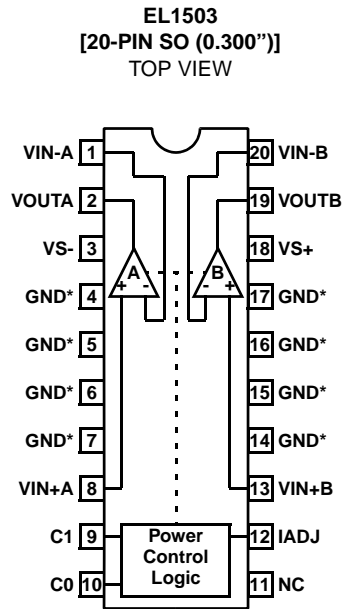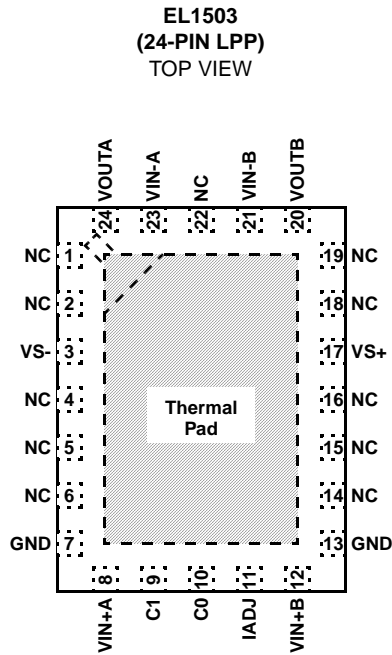

*GND PINS ARE HEAT SPREADERS

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.

Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com