

International  
**IR** Rectifier

## SERIES 45L(R), 150K/ KS(R)

**STANDARD RECOVERY DIODES**

**Stud Version**

### Features

- Alloy diode
- High current carrying capability
- High surge current capabilities
- Stud cathode and stud anode version


150A

### Typical Applications

- Battery charges
- Welders
- Machine tool controls
- High power drives
- Medium traction applications
- Freewheeling diodes

### Major Ratings and Characteristics

Parameters	45L /150K	Units
$I_{F(AV)}$	150	A
@ $T_C$	150	°C
$I_{F(RMS)}$	235	A
$I_{FSM}$ @ 50Hz	3570	A
@ 60Hz	3740	A
$I^2t$ @ 50Hz	64	KA <sup>2</sup> s
@ 60Hz	58	KA <sup>2</sup> s
$V_{RRM}$ range	100 to 600	V
$T_J$	- 40 to 200	°C

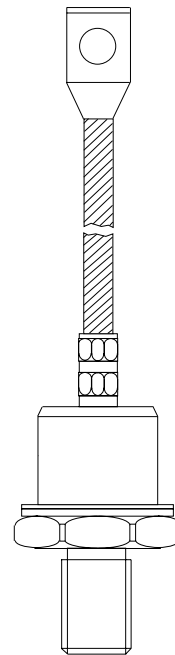

case style  
DO-205AA (DO-8)

## 45L(R), 150K/ KS(R) Series

Bulletin I2037 rev. B 03/03

International  
**IR** Rectifier

### ELECTRICAL SPECIFICATIONS

#### Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage V	$V_{RSM}$ , maximum non-repetitive peak rev. voltage V	$I_{RRM}$ max. @ $T_J = 175^\circ\text{C}$ mA
45L(R) 150K(R) 150KS(R)	10	100	200	35
	20	200	300	
	30	300	400	
	40	400	500	
	60	600	720	

#### Forward Conduction

Parameter	45L /150K	Units	Conditions
$I_{F(AV)}$ Max. average forward current @ Case temperature	150	A	180° conduction, half sine wave
	150	°C	
$I_{F(RMS)}$ Max. RMS forward current	235	A	DC @ 142°C case temperature
$I_{FSM}$ Max. peak, one-cycle forward, non-repetitive surge current	3570	A	t = 10ms No voltage
	3740		t = 8.3ms reapplied
	3000		t = 10ms 100% $V_{RRM}$
	3140		t = 8.3ms reapplied
$I^2t$ Maximum $I^2t$ for fusing	64	KA <sup>2</sup> s	t = 10ms No voltage
	58		t = 8.3ms reapplied
	45		t = 10ms 100% $V_{RRM}$
	41		t = 8.3ms reapplied
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	640	KA <sup>2</sup> √s	t = 0.1 to 10ms, no voltage reapplied
$V_{F(TO)1}$ Low level value of threshold voltage	0.67	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}), T_J = T_J \text{ max.}$
$V_{F(TO)2}$ High level value of threshold voltage	0.83		$(I > \pi \times I_{F(AV)}), T_J = T_J \text{ max.}$
$r_{f1}$ Low level value of forward slope resistance	1.42	mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}), T_J = T_J \text{ max.}$
$r_{f2}$ High level value of forward slope resistance	0.91		$(I > \pi \times I_{F(AV)}), T_J = T_J \text{ max.}$
$V_{FM}$ Max. forward voltage drop	1.33	V	$I_{pk} = 471\text{A}, T_J = 25^\circ\text{C}, t_p = 10\text{ms}$ sinusoidal wave

### Thermal and Mechanical Specifications

Parameter			45L/150K	Units	Conditions
T <sub>J</sub>	Max. junction operating temperature range		-40 to 200	°C	
T <sub>stg</sub>	Max. storage temperature range		-40 to 200		
R <sub>thJC</sub>	Max. thermal resistance, junction to case		0.25	K/W	DC operation
R <sub>thCS</sub>	Max. thermal resistance, case to heatsink		0.10		Mounting surface, smooth, flat and greased
T	Mounting torque 45L	Min.	14.1 (125)	Nm (lbf-in)	Not lubricated threads
		Max.	17.0 (150)		
		Min.	12.2 (108)	Nm (lbf-in)	Lubricated threads
		Max.	15.0 (132)		
	150K 150KS	Min.	11.3 (100)	Nm (lbf-in)	Not lubricated threads
		Max.	14.1 (125)		
		Min.	9.5 (85)	Nm (lbf-in)	Lubricated threads
		Max.	12.5 (110)		
wt	Approximate weight		100 (3.5)	g (oz)	
Case style	45L	DO-205AC (DO-30)			See Outline Table
	150K-A	DO-205AA (DO-8)			
	150KS	B-42			

### $\Delta R_{thJC}$ Conduction

(The following table shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.031	0.023	K/W	$T_J = T_J \text{ max.}$
120°	0.038	0.040		
90°	0.048	0.053		
60°	0.071	0.075		
30°	0.120	0.121		

### Ordering Information Table

Device Code	
	<div style="display: flex; align-items: center; justify-content: center;"> <div style="border: 1px solid black; padding: 2px 5px; margin: 0 5px;">45</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 0 5px;">L</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 0 5px;">R</div> <div style="border: 1px solid black; padding: 2px 5px; margin: 0 5px;">60</div> </div> <div style="display: flex; align-items: center; justify-content: center; margin-top: 5px;"> <div style="border: 1px solid black; border-radius: 50%; padding: 2px 5px; margin: 0 5px;">1</div> <div style="border: 1px solid black; border-radius: 50%; padding: 2px 5px; margin: 0 5px;">2</div> <div style="border: 1px solid black; border-radius: 50%; padding: 2px 5px; margin: 0 5px;">3</div> <div style="border: 1px solid black; border-radius: 50%; padding: 2px 5px; margin: 0 5px;">4</div> </div>
<b>1</b>	- 45 = Standard version
<b>2</b>	- L = Essential Part Number
<b>3</b>	- R = Stud Reverse Polarity (Anode to Stud) None = Stud Normal Polarity (Cathode to Stud)
<b>4</b>	- Voltage code: Code x 10 = $V_{RRM}$ (See Voltage Ratings table)

45L(R), 150K/ KS(R) Series

Bulletin I2037 rev. B 03/03

Ordering Information Table


## Device Code

15	0	K	R	60	A
①	②	③	④	⑤	⑥


- 1** - 15 = Essential Part Number
- 2** - 0 = Standard Device
- 3** - Case Style
  - K = DO205AA (DO-8)
  - KS = B-42
- 4** - R = Stud Reverse Polarity (Anode to Stud)
  - None = Stud Normal Polarity (Cathode to Stud)
- 5** - Voltage code: Code x 10 =  $V_{RRM}$  (See Voltage Ratings table)
- 6** - A = Essential Part Number for 150K (Omitted for 150KS)

NOTE: For Metric Device M12 x 1.75 Contact Factory

Outline Table

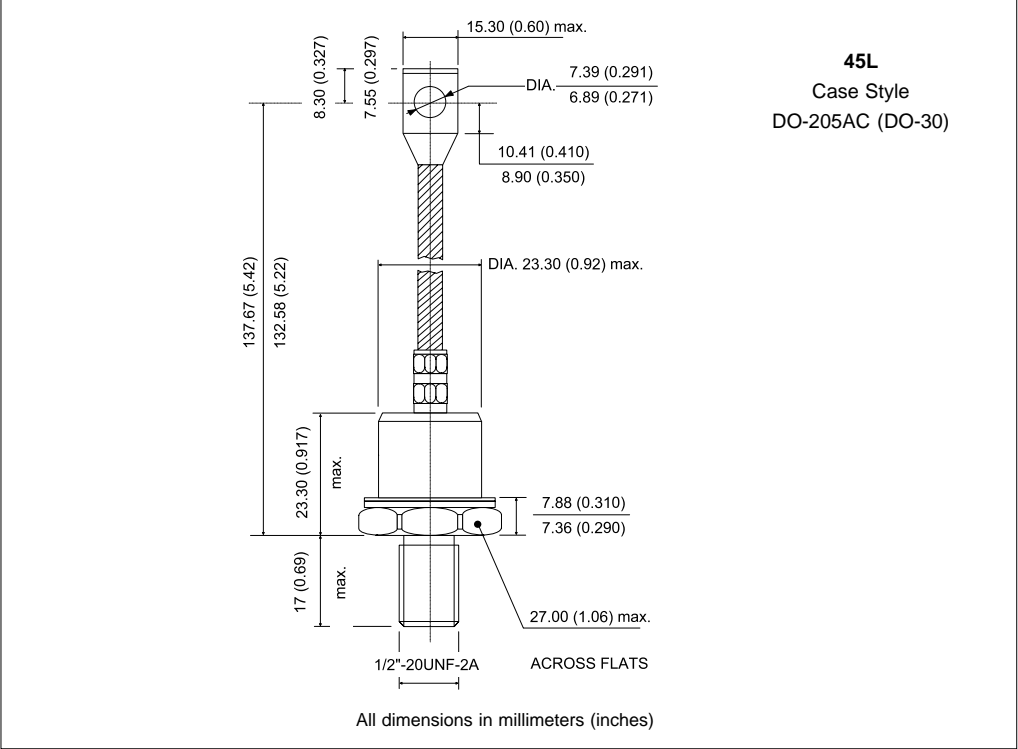

Outline Table

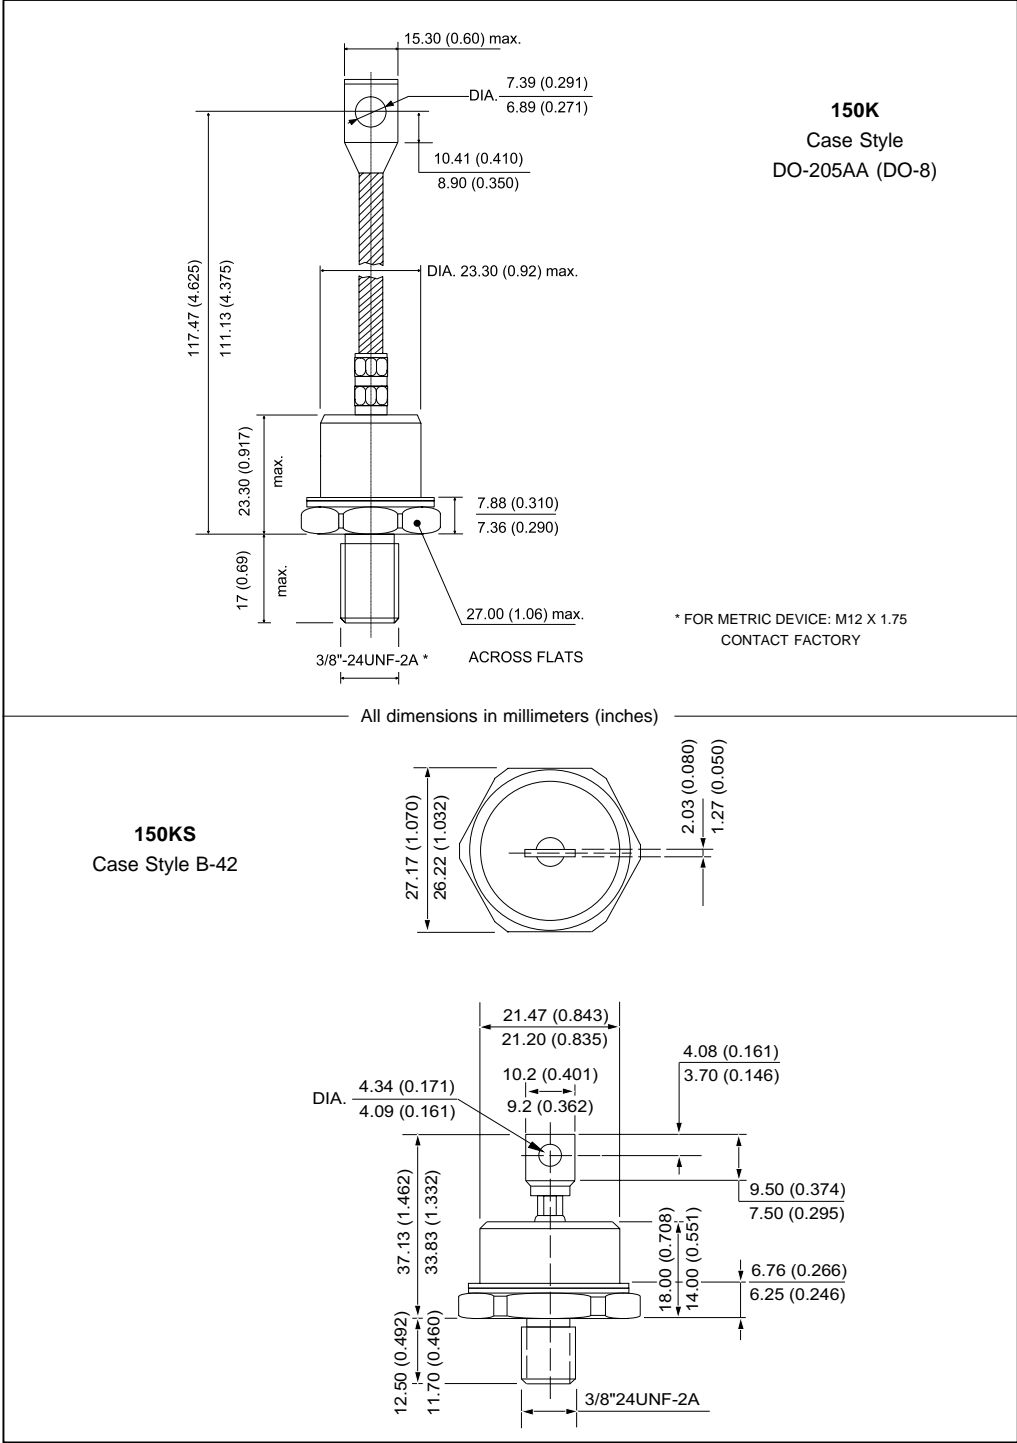

## 45L(R), 150K/ KS(R) Series

Bulletin I2037 rev. B 03/03

International  
IRF Rectifier

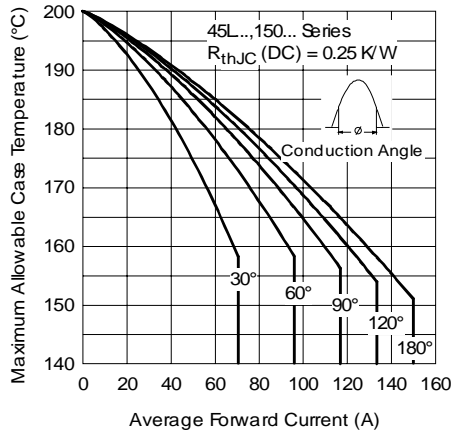


Fig. 1 - Current Ratings Characteristics

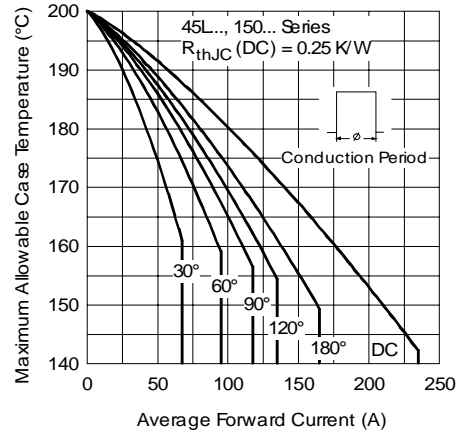


Fig. 2 - Current Ratings Characteristics

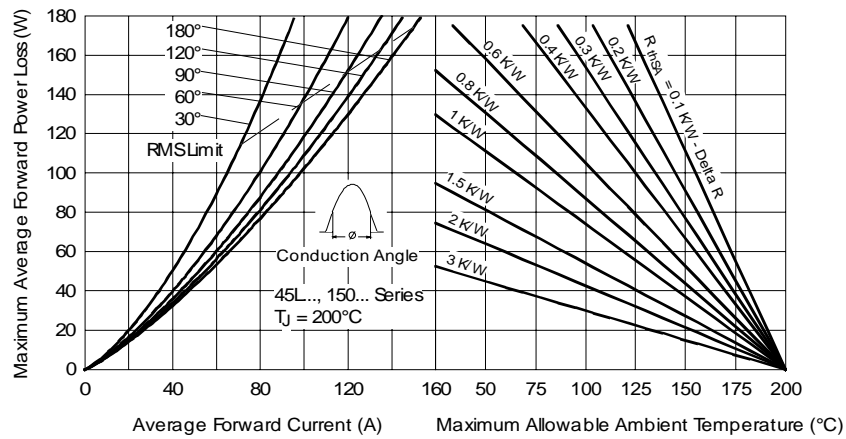


Fig. 3 - Forward Power Loss Characteristics

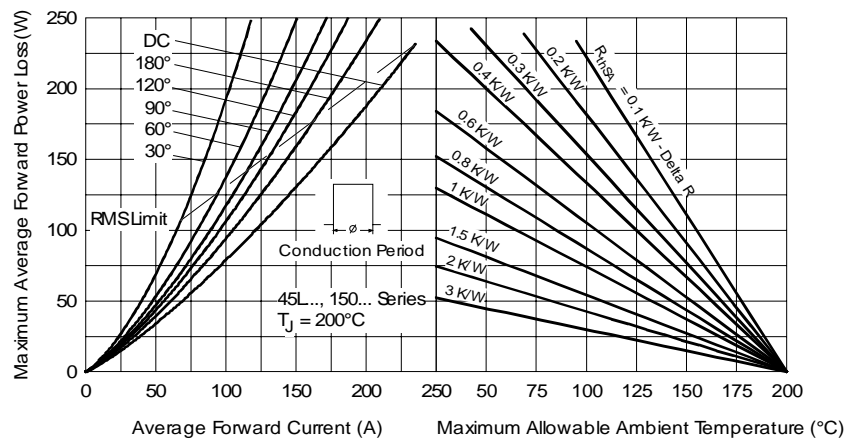


Fig. 4 - Forward Power Loss Characteristics

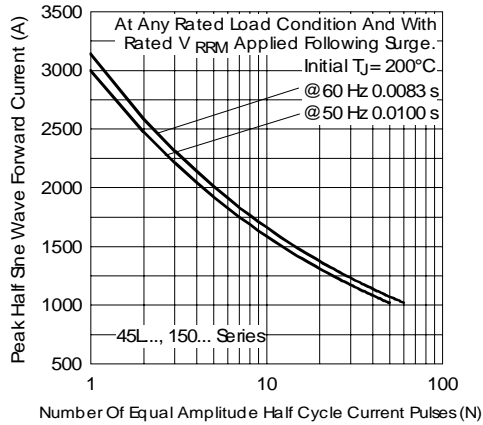


Fig. 5 - Maximum Non-Repetitive Surge Current

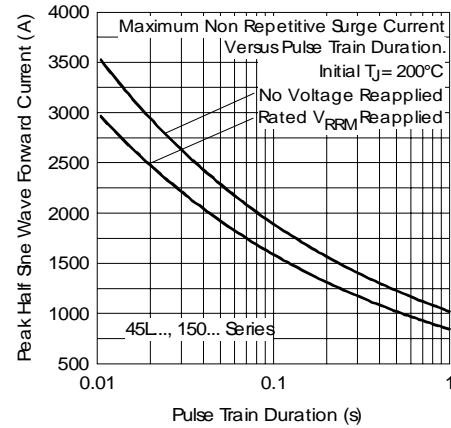


Fig. 6 - Maximum Non-Repetitive Surge Current

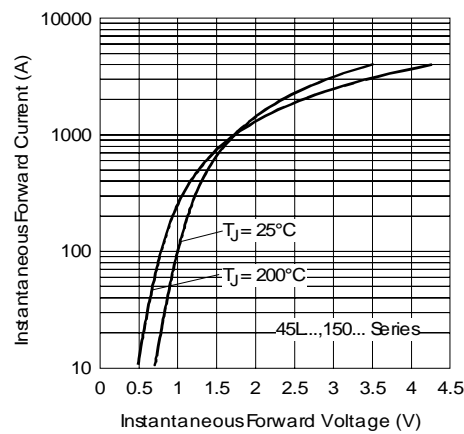


Fig. 7 - Forward Voltage Drop Characteristics

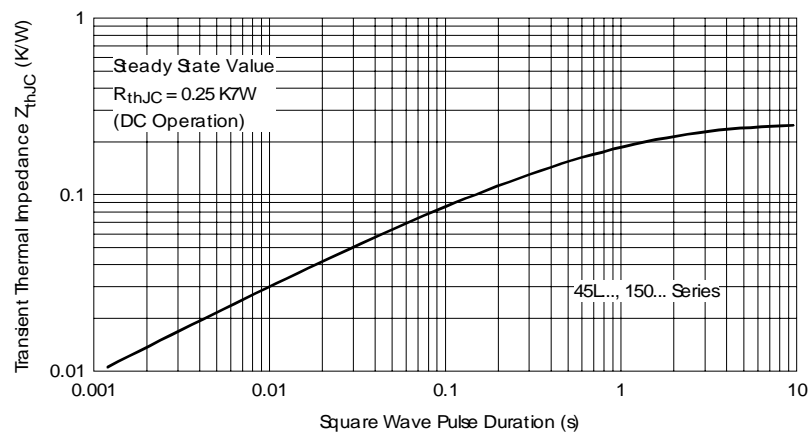


Fig. 8 - Thermal Impedance  $Z_{thJC}$  Characteristic

## **45L(R), 150K/ KS(R) Series**

Bulletin I2037 rev. B 03/03

International  
**IOR** Rectifier

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 03/03