
DISCRETE POWER DIODES and THYRISTORS
DATA BOOK



ST333S SERIES

INVERTER GRADE THYRISTORS

Stud Version

Features

- All diffused design
- Center amplifying gate
- Guaranteed high dv/dt
- Guaranteed high di/dt
- High surge current capability
- Low thermal impedance
- High speed performance


330A

Typical Applications

- Inverters
- Choppers
- Induction heating
- All types of force-commutated converters

Major Ratings and Characteristics

Parameters	ST333S	Units
$I_{T(AV)}$	330	A
@ T_C	75	°C
$I_{T(RMS)}$	518	A
I_{TSM} @ 50Hz	11000	A
@ 60Hz	11520	A
I^2t @ 50Hz	605	KA ² s
@ 60Hz	550	KA ² s
V_{DRM}/V_{RRM}	400 to 800	V
t_q range	10 to 30	μs
T_J	- 40 to 125	°C

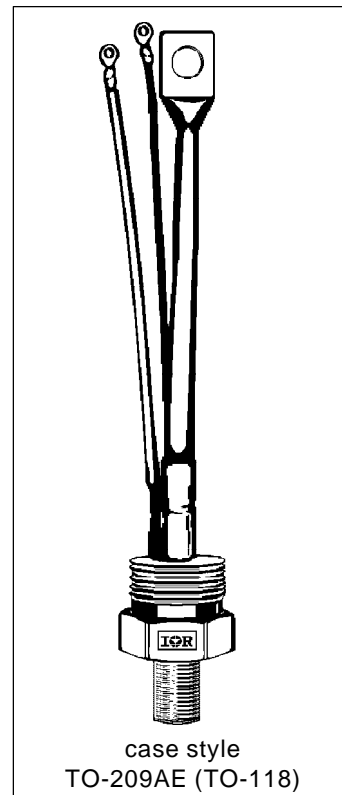




ST333S Series

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{DRM}/V_{RRM} , maximum repetitive peak voltage V	V_{RSM} , maximum non-repetitive peak voltage V	I_{DRM}/I_{RRM} max. @ $T_J = T_J$ max. mA
ST333S	04	400	500	50
	08	800	900	

Current Carrying Capability

Frequency							Units
50Hz	840	600	1280	1040	5430	4350	A
400Hz	650	450	1280	910	2150	1560	
1000Hz	430	230	1090	730	1080	720	
2500Hz	140	60	490	250	400	190	
Recovery voltage Vr	50	50	50	50	50	50	V
Voltage before turn-on Vd	V_{DRM}		V_{DRM}		V_{DRM}		
Rise of on-state current di/dt	50	50	-	-	-	-	A/µs
Case temperature	50	75	50	75	50	75	°C
Equivalent values for RC circuit	10Ω / 0.47µF		10Ω / 0.47µF		10Ω / 0.47µF		

On-state Conduction

Parameter		ST333S	Units	Conditions		
I _{T(AV)}	Max. average on-state current @ Case temperature	330	A	180° conduction, half sine wave		
		75	°C			
I _{T(RMS)}	Max. RMS on-state current	518	A	DC @ 63°C case temperature		
I _{TSM}	Max. peak, one half cycle, non-repetitive surge current	11000		t = 10ms	No voltage	Sinusoidal half wave, Initial T _J = T _J max
		11520		t = 8.3ms	reapplied	
		9250		t = 10ms	100% V _{RRM}	
		9700		t = 8.3ms	reapplied	
I ² t	Maximum I ² t for fusing	605	KA ² s	t = 10ms	No voltage	
		550		t = 8.3ms	reapplied	
		430		t = 10ms	100% V _{RRM}	
		390		t = 8.3ms	reapplied	
I ² √t	Maximum I ² √t for fusing	6050	KA ² √s	t = 0.1 to 10ms, no voltage reapplied		

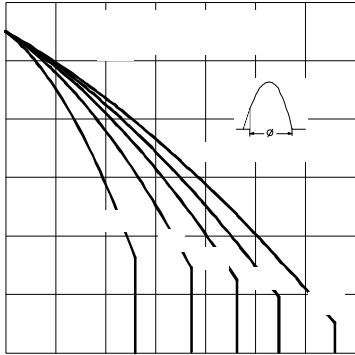


Fig. 1 - Current Ratings Characteristics

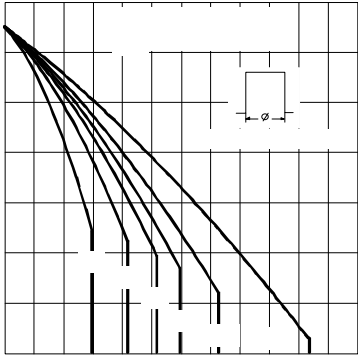


Fig. 2 - Current Ratings Characteristics

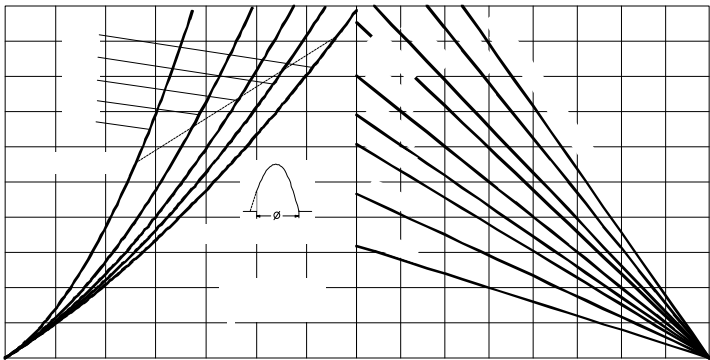


Fig. 3 - On-state Power Loss Characteristics

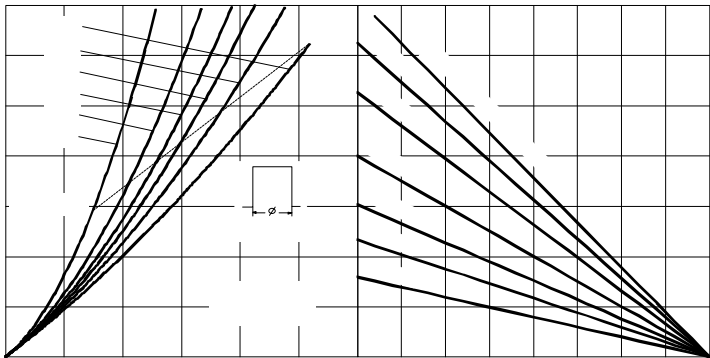


Fig. 4 - On-state Power Loss Characteristics

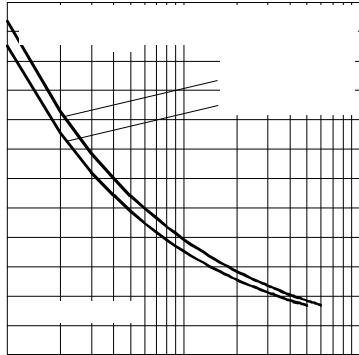


Fig. 5 - Maximum Non-repetitive Surge Current

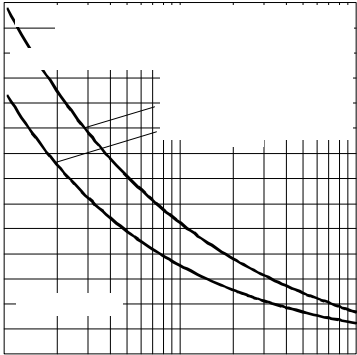


Fig. 6 - Maximum Non-repetitive Surge Current

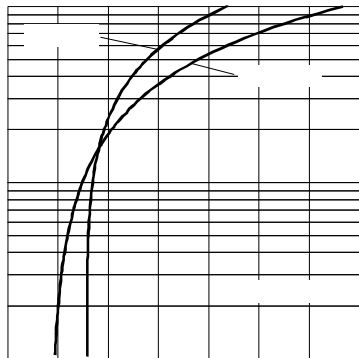


Fig. 7 - On-state Voltage Drop Characteristics

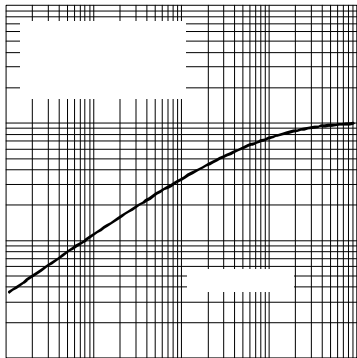


Fig. 8 - Thermal Impedance Z_{thJC} Characteristic

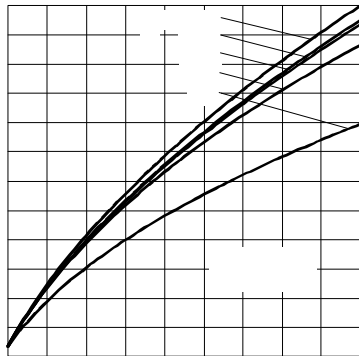


Fig. 9 - Reverse Recovered Charge Characteristics

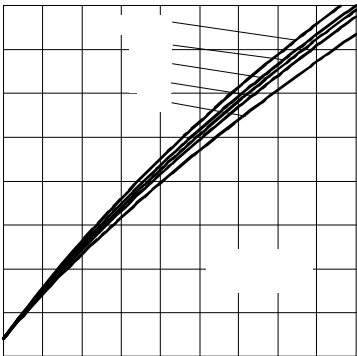


Fig. 10 - Reverse Recovery Current Characteristics

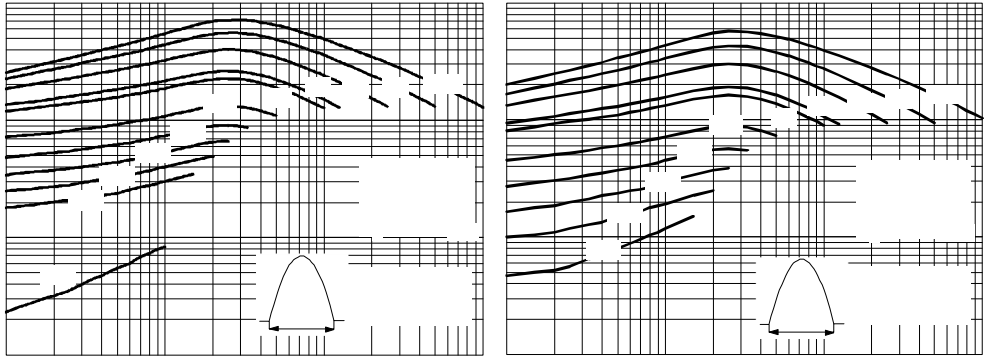


Fig. 11 - Frequency Characteristics

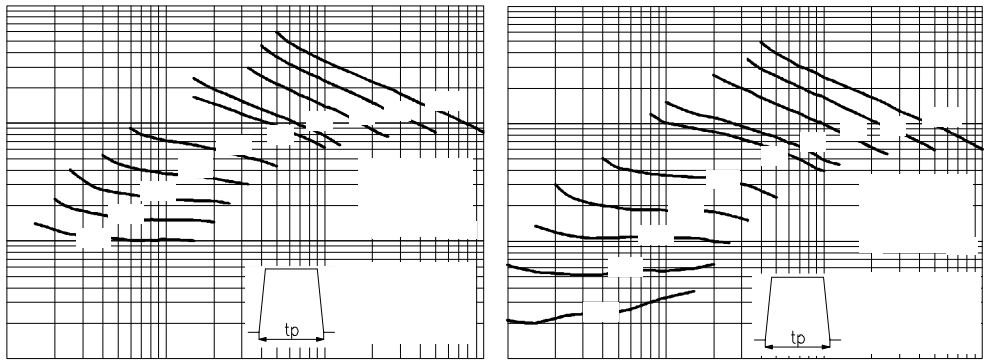


Fig. 12 - Frequency Characteristics

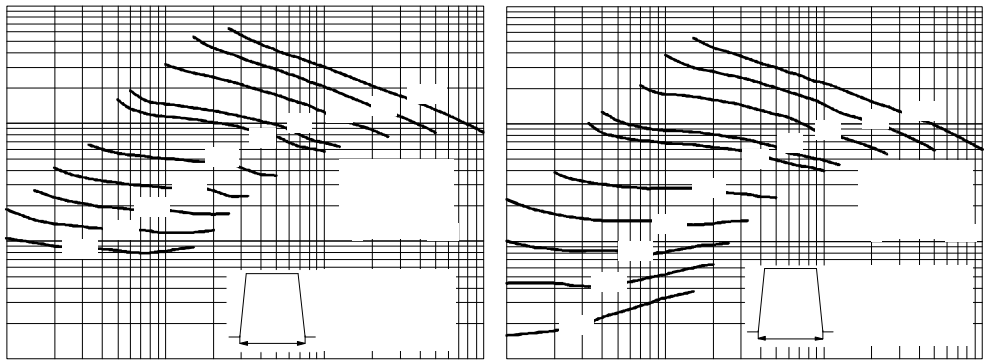


Fig. 13 - Frequency Characteristics

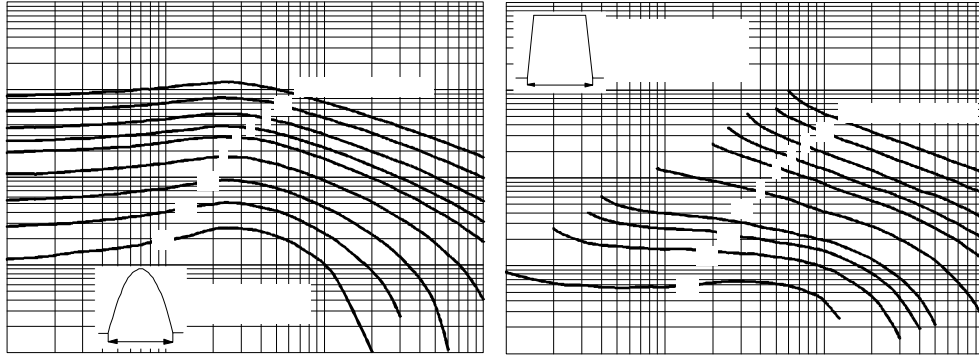


Fig. 14 - Maximum On-state Energy Power Loss Characteristics

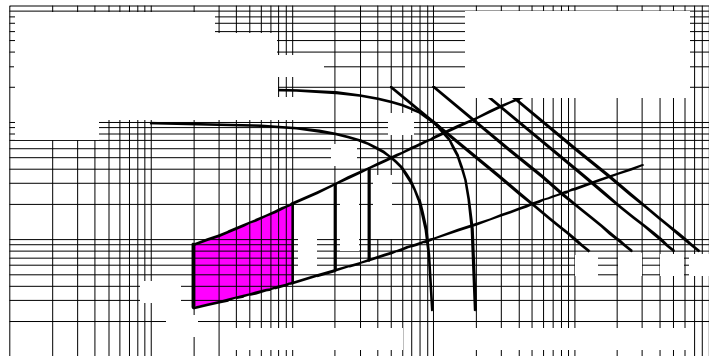


Fig. 15 - Gate Characteristics

On-state Conduction

Parameter	ST333S	Units	Conditions
V_{TM} Max. peak on-state voltage	1.51	V	$I_{TM} = 1040A$, $T_J = T_J \text{ max}$, $t_p = 10ms$ sine wave pulse
$V_{T(To)1}$ Low level value of threshold voltage	0.91		$(16.7\% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, $T_J = T_J \text{ max}$.
$V_{T(To)2}$ High level value of threshold voltage	0.92		$(I > \pi \times I_{T(AV)})$, $T_J = T_J \text{ max}$.
r_{t1} Low level value of forward slope resistance	0.58	m Ω	$(16.7\% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, $T_J = T_J \text{ max}$.
r_{t2} High level value of forward slope resistance	0.58		$(I > \pi \times I_{T(AV)})$, $T_J = T_J \text{ max}$.
I_H Maximum holding current	600	mA	$T_J = 25^\circ C$, $I_T > 30A$
I_L Typical latching current	1000		$T_J = 25^\circ C$, $V_A = 12V$, $R_a = 6\Omega$, $I_G = 1A$

Switching

Parameter	ST333S	Units	Conditions
di/dt Max. non-repetitive rate of rise of turned-on current	1000	A/ μs	$T_J = T_J \text{ max}$, $V_{DRM} = \text{rated } V_{DRM}$ $I_{TM} = 2 \times di/dt$
t_d Typical delay time	1.0	μs	$T_J = 25^\circ C$, $V_{DM} = \text{rated } V_{DRM}$, $I_{TM} = 50A$ DC, $t_p = 1\mu s$ Resistive load, Gate pulse: 10V, 5 Ω source
t_q Max. turn-off time	Min 10 Max 30		$T_J = T_J \text{ max}$, $I_{TM} = 550A$, commutating $di/dt = 40A/\mu s$ $V_R = 50V$, $t_p = 500\mu s$, dv/dt : see table in device code

Blocking

Parameter	ST333S	Units	Conditions
dv/dt Maximum critical rate of rise of off-state voltage	500	V/ μs	$T_J = T_J \text{ max}$. linear to 80% V_{DRM} , higher value available on request
I_{RRM} I_{DRM} Max. peak reverse and off-state leakage current	50	mA	$T_J = T_J \text{ max}$, rated V_{DRM}/V_{RRM} applied

Triggering

Parameter	ST333S	Units	Conditions
P_{GM} Maximum peak gate power	60	W	$T_J = T_J \text{ max}$, $f = 50Hz$, $d\% = 50$
$P_{G(AV)}$ Maximum average gate power	10		
I_{GM} Max. peak positive gate current	10	A	$T_J = T_J \text{ max}$, $t_p \leq 5ms$
$+V_{GM}$ Maximum peak positive gate voltage	20	V	$T_J = T_J \text{ max}$, $t_p \leq 5ms$
$-V_{GM}$ Maximum peak negative gate voltage	5		
I_{GT} Max. DC gate current required to trigger	200	mA	$T_J = 25^\circ C$, $V_A = 12V$, $R_a = 6\Omega$
V_{GT} Max. DC gate voltage required to trigger	3	V	
I_{GD} Max. DC gate current not to trigger	20	mA	$T_J = T_J \text{ max}$, rated V_{DRM} applied
V_{GD} Max. DC gate voltage not to trigger	0.25	V	

ST333S Series

Thermal and Mechanical Specifications

Parameter	ST333S	Units	Conditions
T_J Max. junction operating temperature range	-40 to 125	°C	
T_{stg} Max. storage temperature range	-40 to 150		
R_{thJC} Max. thermal resistance, junction to case	0.10	K/W	DC operation
R_{thCS} Max. thermal resistance, case to heatsink	0.03		Mounting surface, smooth, flat and greased
T Mounting torque, $\pm 10\%$	48.5 (425)	Nm (lbf-in)	Non lubricated threads
wt Approximate weight	535	g	
Case style	TO-209AE (TO-118)		See Outline Table

ΔR_{thJC} Conduction

(The following table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.011	0.008	K/W	$T_J = T_J \text{ max.}$
120°	0.013	0.014		
90°	0.017	0.018		
60°	0.025	0.026		
30°	0.041	0.042		

Ordering Information Table

Device Code

ST	33	3	S	08	P	F	M	0	
1	2	3	4	5	6	7	8	9	10

- 1** - Thyristor
- 2** - Essential part number
- 3** - 3 = Fast turn off
- 4** - S = Compression bonding Stud
- 5** - Voltage code: Code x 100 = V_{RRM} (See Voltage Ratings table)
- 6** - P = Stud base 3/4" 16UNF-2A
M = Stud base metric threads M24 x 1.5
- 7** - Reapplied dv/dt code (for t_q test condition)
- 8** - t_q code
- 9** - 0 = Eyelet terminals (Gate and Aux. Cathode Leads)
1 = Fast-on terminals (Gate and Aux. Cathode Leads)
3 = Threaded top terminal 3/8" 24UNF-2A
- 10** - Critical dv/dt:
None = 500V/μsec (Standard value)
L = 1000V/μsec (Special selection)


dv/dt - t_q combinations available					
dv/dt (V/μs)	20	50	100	200	400
10	CN	DN	EN	--	--
12	CM	DM	EM	FM *	--
15	CL	DL	EL	FL *	HL
18	CP	DP	EP	FP	HP
20	CK	DK	EK	FK	HK
25	--	--	--	FJ	HJ
30	--	--	--	--	HH

*Standard part number.

All other types available only on request.

Outline Table

CERAMIC HOUSING

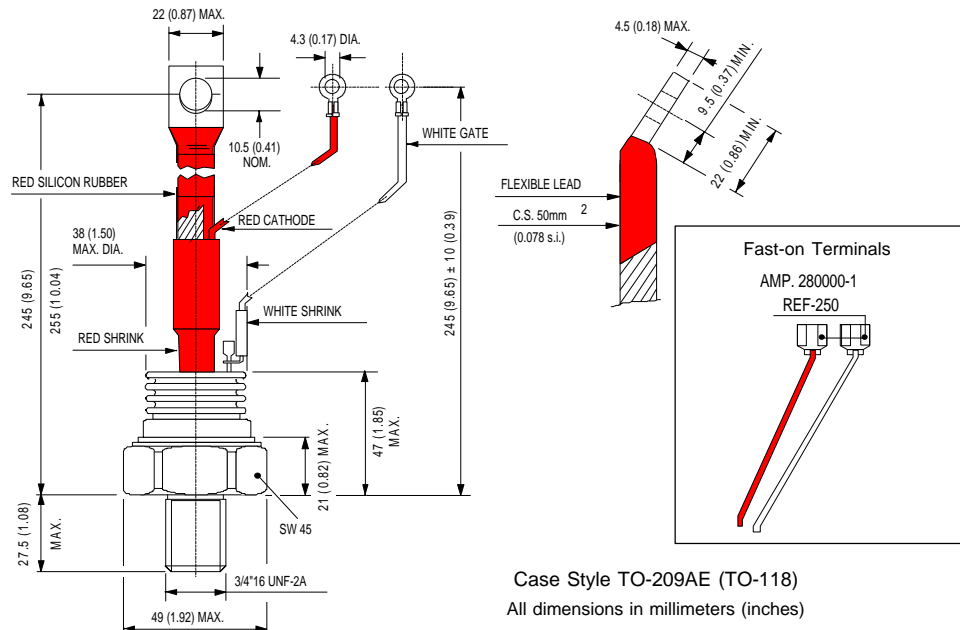


* FOR METRIC DEVICE: M24 X 1.5 - LENGTH SCREW 21 (0.83) MAX.

CERAMIC HOUSING

Case Style TO-209AE (TO-118)
with top thread terminal 3/8"

All dimensions in millimeters (inches)

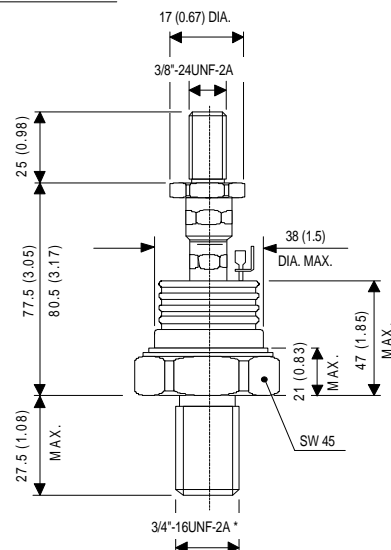

* FOR METRIC DEVICE: M24 x 1.5 - LENGTH SCREW 21 (0.83) MAX.