

# Power Schottky Rectifier


$$I_{FAV} = 2 \times 10 \text{ A}$$

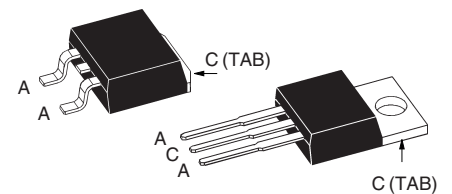
$$V_{RRM} = 25 \text{ V}$$

$$V_F = 0.40 \text{ V}$$

## Preliminary Data

$V_{RSM}$ V	$V_{RRM}$ V	Type
25	25	DSSK 18-0025B
25	25	DSSK 18-0025BS


**TO-263 AB**  
 (...S-Type)

**TO-220 AC**


A = Anode, C = Cathode, TAB = Cathode

Symbol	Conditions	Maximum Ratings	
$I_{FRMS}$		35	A
$I_{FAV}$	$T_C = 140^\circ\text{C}$ ; rectangular, $d = 0.5$	10	A
$I_{FAV}$	$T_C = 140^\circ\text{C}$ ; rectangular, $d = 0.5$ ; per device	20	A
$I_{FSM}$	$T_{VJ} = 45^\circ\text{C}$ ; $t_p = 10 \text{ ms}$ (50 Hz), sine	140	A
$E_{AS}$	$I_{AS} = \text{tbd A}$ ; $L = 180 \mu\text{H}$ ; $T_{VJ} = 25^\circ\text{C}$ ; non repetitive	tbd	mJ
$I_{AR}$	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$ ; repetitive	tbd	A
$(dv/dt)_{cr}$		tbd	V/ $\mu\text{s}$
$T_{VJ}$		-55...+150	$^\circ\text{C}$
$T_{VJM}$		150	$^\circ\text{C}$
$T_{stg}$		-55...+150	$^\circ\text{C}$
$P_{tot}$	$T_C = 25^\circ\text{C}$	75	W
$M_d$	mounting torque	0.4...0.6	Nm
Weight	typical	2	g

## Features

- International standard package
- Very low  $V_F$
- Extremely low switching losses
- Low  $I_{RM}$ -values
- Epoxy meets UL 94V-0

## Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

## Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Symbol	Conditions	Characteristic Values	
		typ.	max.
$I_R$ ①	$T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$ $T_{VJ} = 100^\circ\text{C}$ $V_R = V_{RRM}$	10 40	mA mA
$V_F$	$I_F = 10 \text{ A}$ ; $T_{VJ} = 125^\circ\text{C}$ $I_F = 10 \text{ A}$ ; $T_{VJ} = 25^\circ\text{C}$ $I_F = 20 \text{ A}$ ; $T_{VJ} = 125^\circ\text{C}$	0.37 0.45 0.51	V V V
$R_{thJC}$ $R_{thCH}$	0.5	1.7	K/W K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %  
 Data according to IEC 60747 and per diode unless otherwise specified

Dimensions see Outlines.pdf