



## SOT-89 Encapsulate Three Terminal Voltage Regulator

### CJ78L06 Three-terminal positive voltage regulator

#### FEATURES

Maximum Output current

$I_{OM}$ : 0.1 A

Output voltage


$V_O$ : 6 V

SOT-89

1. OUT

2. GND

3. IN



**ABSOLUTE MAXIMUM RATINGS**( Operating temperature range applies unless otherwise specified )


Parameter	Symbol	Value	Units
Input Voltage	$V_I$	30	V
Operating Junction Temperature Range	$T_{OPR}$	0—+125	
Storage Temperature Range	$T_{STG}$	-55—+150	

#### ELECTRICAL CHARACTERISTICS

( $V_I=12V, I_O=40mA, 0 < T_J < 125^\circ C, C_1=0.33 \mu F, C_O=0.1 \mu F$ , unless otherwise specified )


Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_O$	$T_J=25^\circ C$	5.75	6.0	6.25	V
		8V $V_I$ 20V, $I_O=1mA-40mA$	5.7	6.0	6.3	V
		8.5V $V_I$ $V_{MAX}$ , $I_O=1mA-70mA$	5.7	6.0	6.3	V (note)
Load Regulation	$V_O$	$T_J=25^\circ C$ , $I_O=1mA-100mA$		16	80	mV
		$T_J=25^\circ C$ , $I_O=1mA-70mA$		9	40	mV
Line regulation	$V_O$	8V $V_I$ 20V, $T_J=25^\circ C$		35	175	mV
		9V $V_I$ 20V, $T_J=25^\circ C$		29	125	mV
Quiescent Current	$I_q$	25		3.9	6.0	mA
Quiescent Current Change	$I_q$	9V $V_I$ 20V			1.5	mA
	$I_q$	1mA $I_O$ 40mA			0.1	mA
Output Noise Voltage	$V_N$	10Hz f 100KHz		46		$\mu V$
Ripple Rejection	RR	9V $V_I$ 19V, $f=120Hz, T_J=25^\circ C$	40	48		dB
Dropout Voltage	$V_d$	$T_J=25^\circ C$		1.7		V

#### TYPICAL APPLICATION

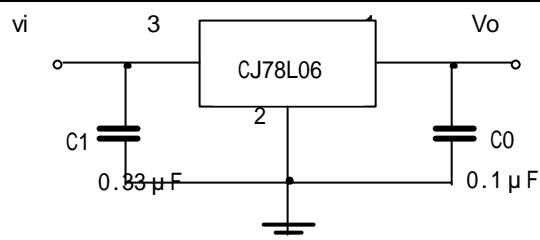

Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

## SOT-89-3L PACKAGE OUTLINE DIMENSIONS

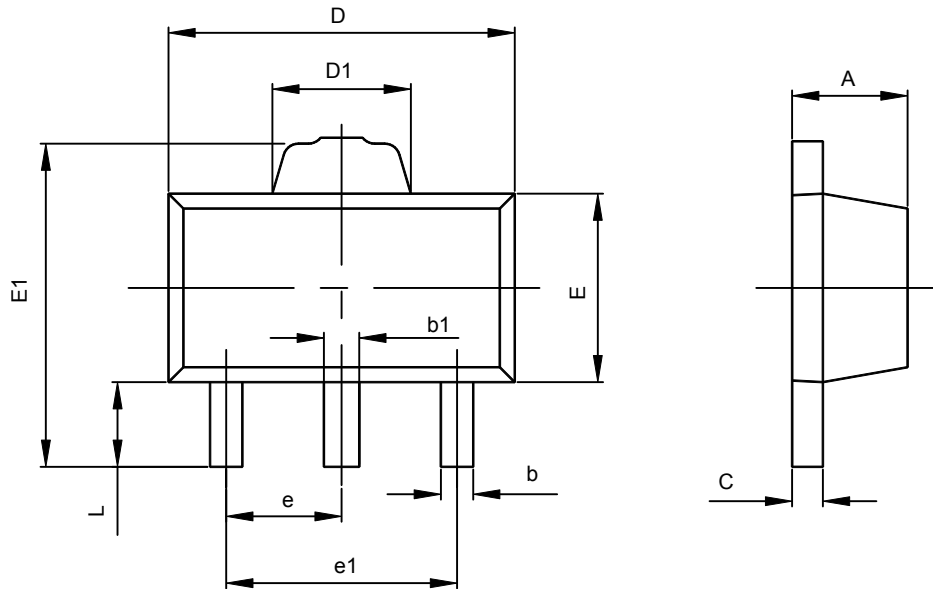

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.360	0.560	0.014	0.022
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.400	1.800	0.055	0.071
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500TYP		0.060TYP	
e1	2.900	3.100	0.114	0.122
L	0.900	1.100	0.035	0.043