


SWITCHING APPLICATION.  
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

### FEATURES



- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Packing Density.

### EQUIVALENT CIRCUIT

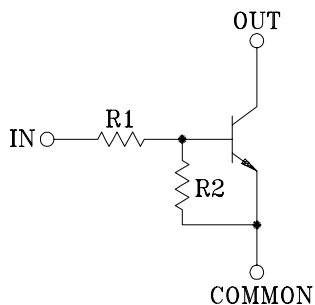

### BIAS RESISTOR VALUES

TYPE NO.	R1(k $\Omega$ )	R2(k $\Omega$ )
KRC401	4.7	4.7
KRC402	10	10
KRC403	22	22
KRC404	47	47
KRC405	2.2	47
KRC406	4.7	47

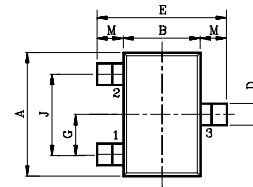

1. COMMON (EMITTER)
2. IN (BASE)
3. OUT (COLLECTOR)

DIM	MILLIMETERS
A	2.00±0.20
B	1.25±0.15 -0.15
C	0.90±0.10
D	0.35±0.10 -0.05
E	2.10±0.20
G	0.65
H	0.15±0.10 -0.06
J	1.30
K	0.00-0.10
L	0.70
M	0.42±0.10
N	0.10 MIN

USM


### MAXIMUM RATINGS (Ta=25℃)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRC401 ~406	V <sub>O</sub>	50	V
Input Voltage	KRC401	V <sub>I</sub>	20, -10	V
	KRC402		30, -10	
	KRC403		40, -10	
	KRC404		40, -10	
	KRC405		12, -5	
	KRC406		20, -5	
Output Current	KRC401 ~406	I <sub>O</sub>	100	mA
Power Dissipation		P <sub>D</sub>	100	mW
Junction Temperature		T <sub>j</sub>	150	℃
Storage Temperature Range		T <sub>stg</sub>	-55~150	℃

### MARK SPEC

TYPE	KRC401	KRC402	KRC403	KRC404	KRC405	KRC406
MARK	NA	NB	NC	ND	NE	NF

Marking Type Name



# KRC401 ~ KRC406

## ELECTRICAL CHARACTERISTICS (Ta=25℃)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRC401 ~ 406	$I_{O(OFF)}$	$V_O=50V, V_I=0$	–	–	500	nA
DC Current Gain	KRC401	$G_I$	$V_O=5V, I_O=10mA$	30	55	–	
	KRC402			50	80	–	
	KRC403			70	120	–	
	KRC404			80	200	–	
	KRC405			80	200	–	
	KRC406			80	200	–	
Output Voltage	KRC401 ~ 406	$V_{O(ON)}$	$I_O=10mA, I_I=0.5mA$	–	0.1	0.3	V
Input Voltage (ON)	KRC401	$V_{I(ON)}$	$V_O=0.2V, I_O=5mA$	–	1.5	2.0	V
	KRC402			–	1.8	2.4	
	KRC403			–	2.1	3.0	
	KRC404			–	2.8	5.0	
	KRC405			–	0.8	1.1	
	KRC406			–	0.9	1.3	
Input Voltage (OFF)	KRC401 ~ 404	$V_{I(OFF)}$	$V_O=5V, I_O=0.1mA$	1.0	1.2	–	V
	KRC405 ~ 406			0.5	0.65	–	
Transition Frequency	KRC401 ~ 406	$f_T *$	$V_O=10V, I_O=5mA$	–	200	–	MHz
Input Current	KRC401	$I_I$	$V_I=5V$	–	–	1.8	mA
	KRC402			–	–	0.88	
	KRC403			–	–	0.36	
	KRC404			–	–	0.18	
	KRC405			–	–	3.6	
	KRC406			–	–	1.8	







Note : \*Characteristic of Transistor Only

# KRC401 ~ KRC406







## ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC			SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRC401	t <sub>r</sub>	V <sub>O</sub> =5V V <sub>IN</sub> =5V R <sub>L</sub> =1kΩ	–	0.03	–	μS
		KRC402			–	0.05	–	
		KRC403			–	0.12	–	
		KRC404			–	0.22	–	
		KRC405			–	0.01	–	
		KRC406			–	0.03	–	
	Storage Time	KRC401	t <sub>stg</sub>		–	2.0	–	
		KRC402			–	2.0	–	
		KRC403			–	2.0	–	
		KRC404			–	2.0	–	
		KRC405			–	2.0	–	
		KRC406			–	2.0	–	
	Fall Time	KRC401	t <sub>f</sub>		–	0.12	–	
		KRC402			–	0.36	–	
		KRC403			–	0.35	–	
		KRC404			–	0.6	–	
		KRC405			–	0.1	–	
		KRC406			–	0.19	–	

# KRC401 ~ KRC406

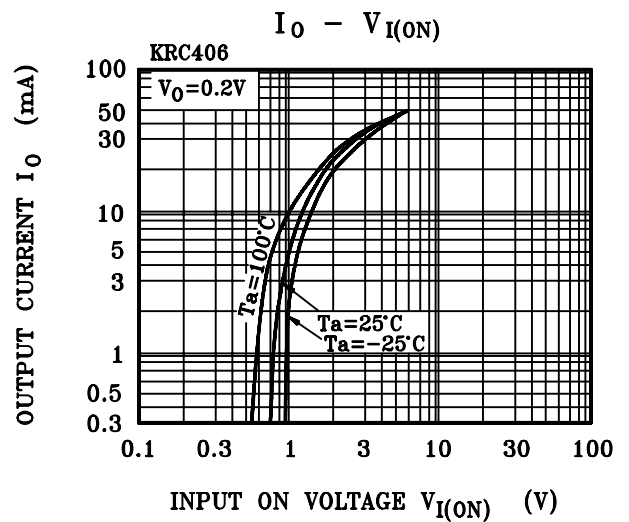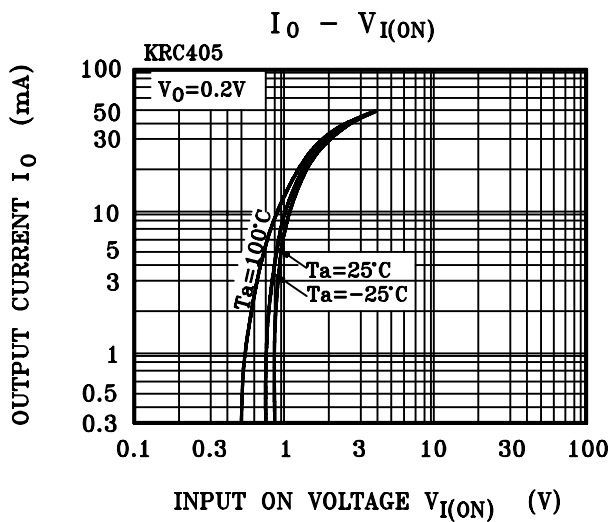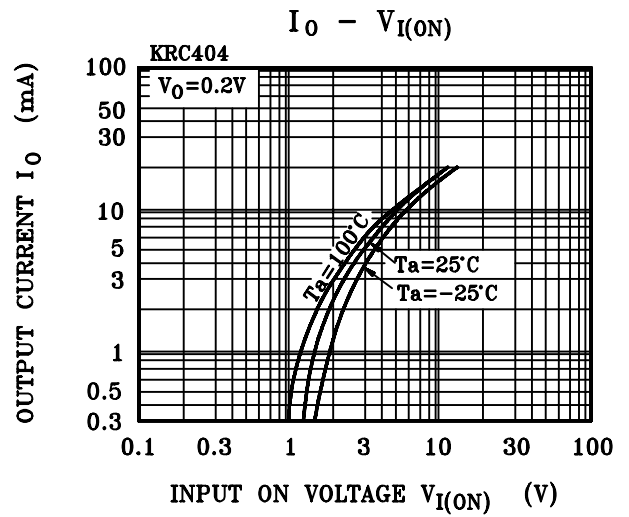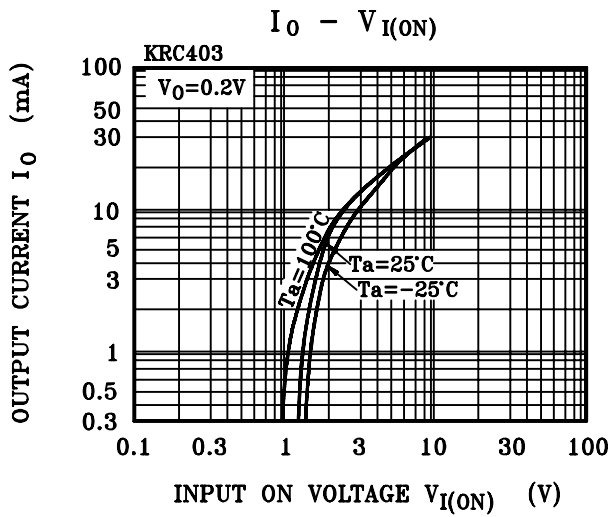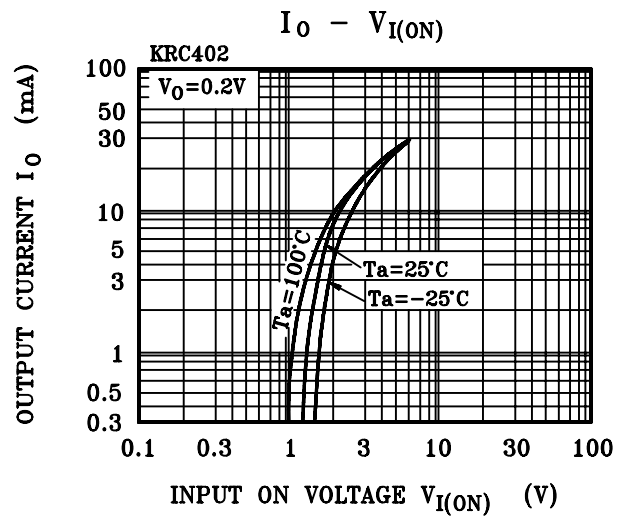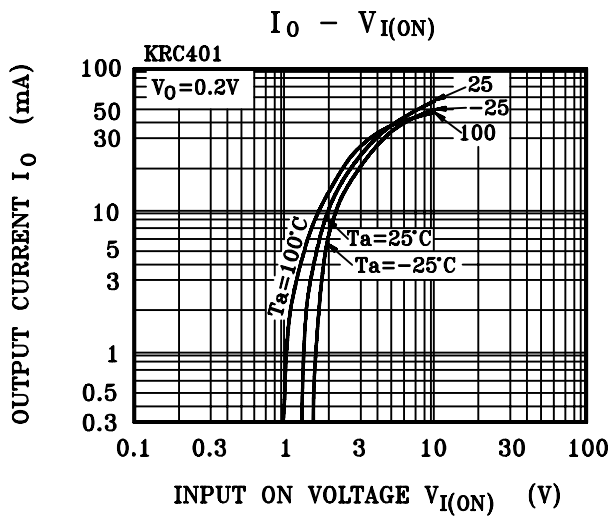

# KRC401 ~ KRC406

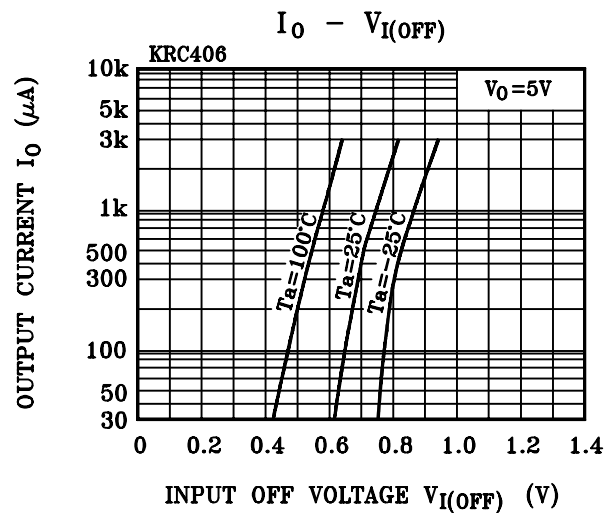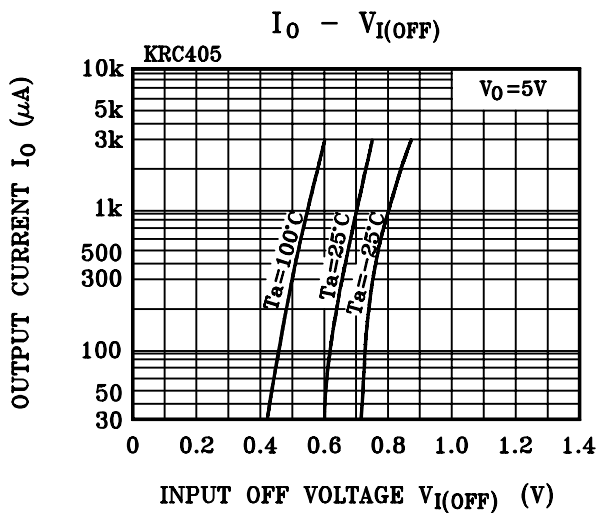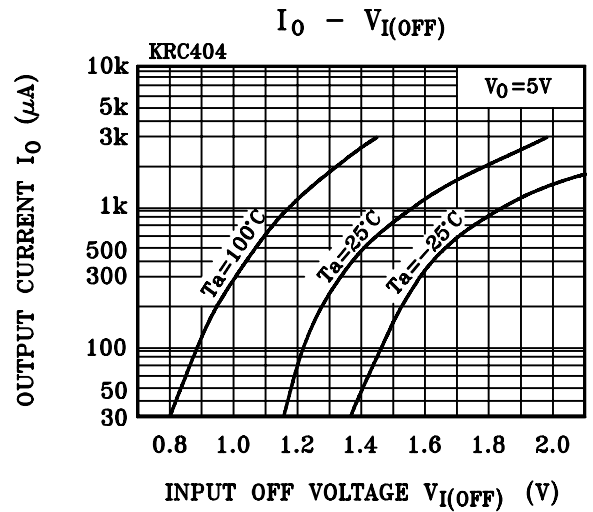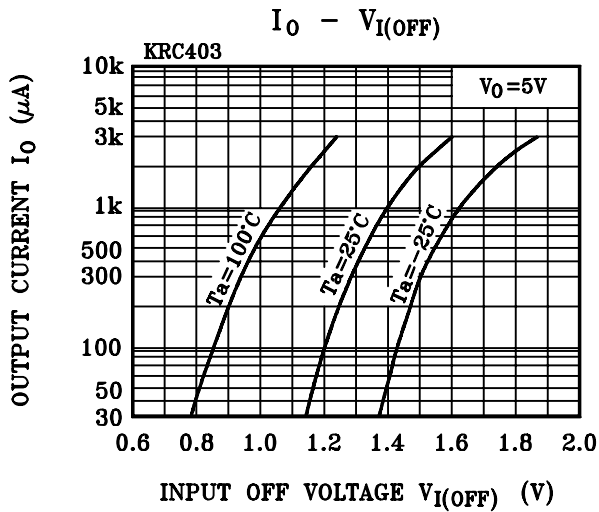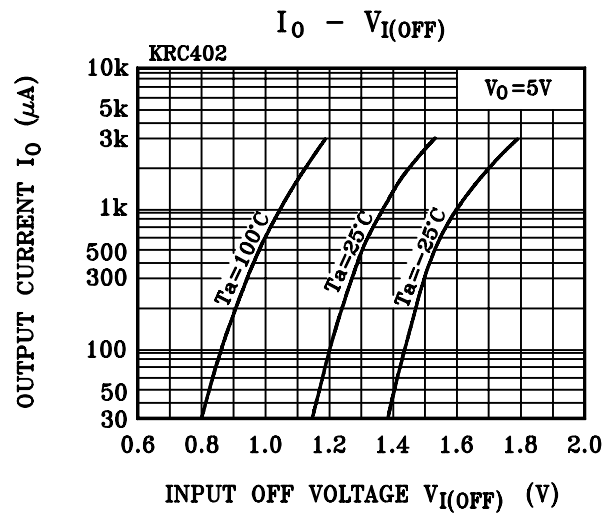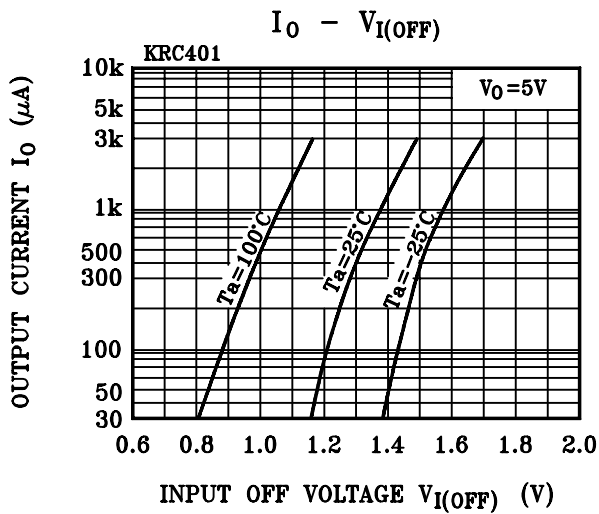

# KRC401 ~ KRC406

