

W934RS/SRD

SUPER BRIGHT RED


Features

- PRE-TRIMMED LEADS FOR PC MOUNTING.
- I.C. COMPATIBLE.
- PILLARS ARE DESIGNED FOR POSITIONING THE HOUSING ON P.C. BOARD.
- BLACK CASE ENHANCES CONTRAST RATIO.
- WIDE VIEWING ANGLE.
- HIGH RELIABILITY LIFE MEASURED IN YEARS.
- UL RATING : 94V-0.
- HOUSING MATERIAL: TYPE 66 NYLON.

Description

The Super Bright Red source color devices are made with Gallium Aluminum Arsenide Red Light Emitting Diode.

Package Dimensions

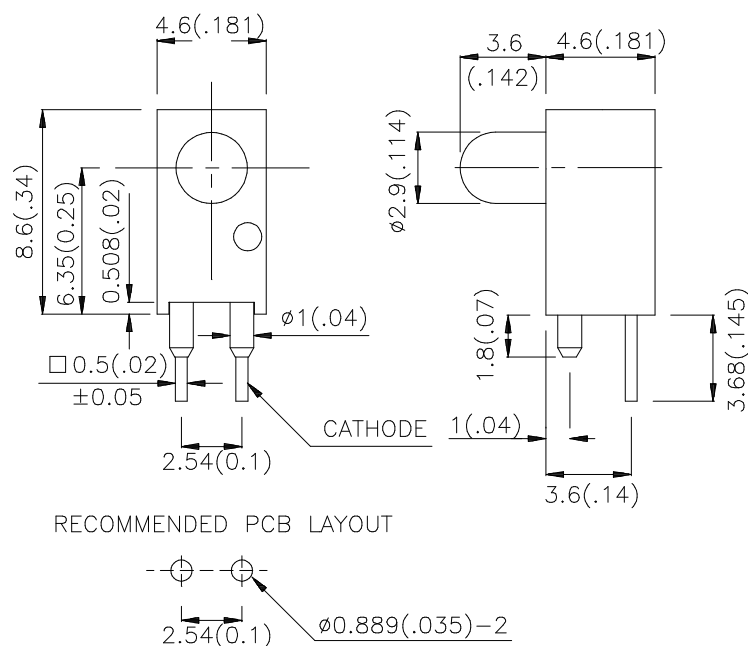

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25 (0.01")$ unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

Selection Guide

| Part No. | Dice | Lens Type | Iv (mcd) @ 20 mA | | Viewing Angle |
|------------|--------------------------|--------------|---------------------|------|------------------|
| | | | Min. | Typ. | 2θ1/2 |
| W934RS/SRD | SUPER BRIGHT RED(GaAlAs) | RED DIFFUSED | 110 | 300 | 60° |

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at T_A=25°C

| Symbol | Parameter | Device | Typ. | Max. | Units | Test Conditions |
|-------------------|--------------------------|------------------|------|------|-------|-------------------------------|
| λ _{peak} | Peak Wavelength | Super Bright Red | 660 | | nm | I _F = 20mA |
| λ _D | Dominate Wavelength | Super Bright Red | 640 | | nm | I _F = 20mA |
| Δλ _{1/2} | Spectral Line Half-width | Super Bright Red | 20 | | nm | I _F = 20mA |
| C | Capacitance | Super Bright Red | 45 | | pF | V _F = 0V; f = 1MHz |
| V _F | Forward Voltage | Super Bright Red | 1.85 | 2.5 | V | I _F = 20mA |
| I _R | Reverse Current | Super Bright Red | | 10 | uA | V _R = 5V |


Absolute Maximum Ratings at T_A=25°C

| Parameter | Super Bright Red | Units |
|-------------------------------|---------------------|-------|
| Power dissipation | 100 | mW |
| DC Forward Current | 30 | mA |
| Peak Forward Current [1] | 155 | mA |
| Reverse Voltage | 5 | V |
| Operating/Storage Temperature | -40°C To +85°C | |
| Lead Solder Temperature [2] | 260°C For 5 Seconds | |

Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2. 2mm below package base.

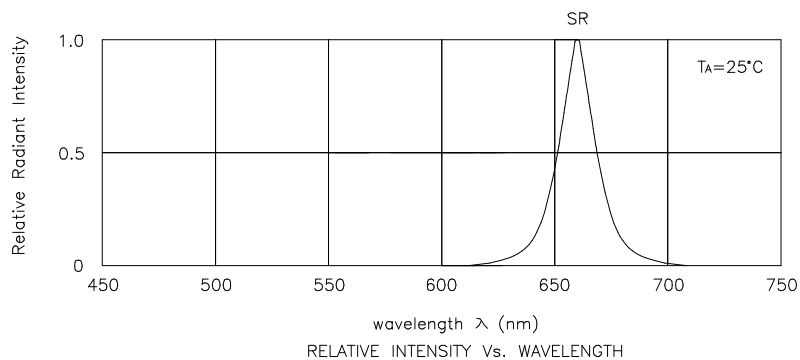

Super Bright Red

W934RS/SRD

