

LSFB19-130-001M0


cdmaOne-TX-IF

■Features

- IF filter for cdmaOne-TX.
- Miniature size and light weight.
- Because it is leadless type, automatic mounting is possible.

■Standard Frequencies


- 130.38MHz.

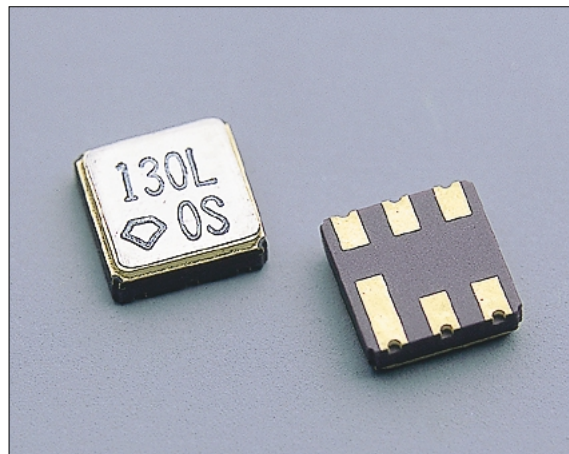

■Specifications

Item	Unit	Conditions	Specifications
Nominal Frequency	MHz		130.38
Operating Temperature Range	°C	-30~+75	
Storage Temperature Range	°C	-40~+80	
Pass Bandwidth	kHz	-3dB	Fo±630 MIN.
Insertion Loss	dB	Minimum Loss	7.0 MAX.
Guaranteed Attenuation	dB	Fo+4.95MHz	38 MIN.
		Fo+9.9MHz	38 MIN.
Group Delay Deviation	nsec	Fo±300kHz	800 MAX.

■Outline

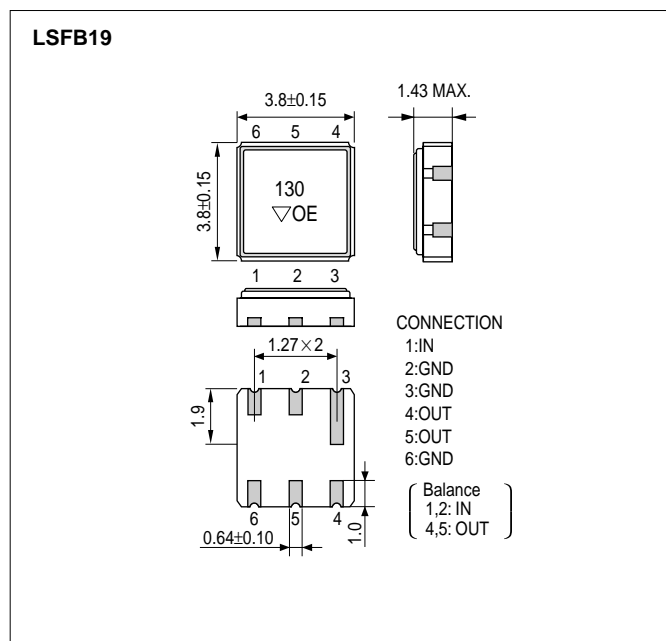

Dimensions(mm)

■Measurement Circuit

