


FP4 Series

Features

- Compact size. (7×5×1.3mm, 4pole)
- Excellent vibration resistance and shock resistance.
- Designed for automatic mounting and reflow soldering.

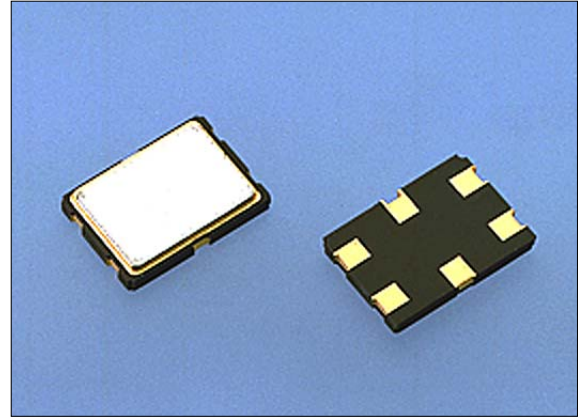

Original Size


Specifications

Type	Number of inner units	Pass Bandwidth		Ripple	Insertion Loss	Stop Bandwidth		Terminating Impedance	Operating Temp. Range
		dB	kHz MIN	dB MAX	dB MAX	dB	kHz MAX	Ω //pF	°C
MXF45-7.5BF-FP4	1	3	± 3.75	1	4	30	± 15	500//4.5 Cc(13pF)	-20~+70
MXF45-15BF-FP4	1	3	± 7.5	1.5	2	30	± 25	600//2.3 Cc(7.5pF)	-20~+70
MXF45-30BF-FP4	1	3	± 15	1	3	30	± 40	1.2k//1 Cc(2.5pF)	-20~+70

※Taping item packaging : one unit 1,000 pcs



Outline

FP4

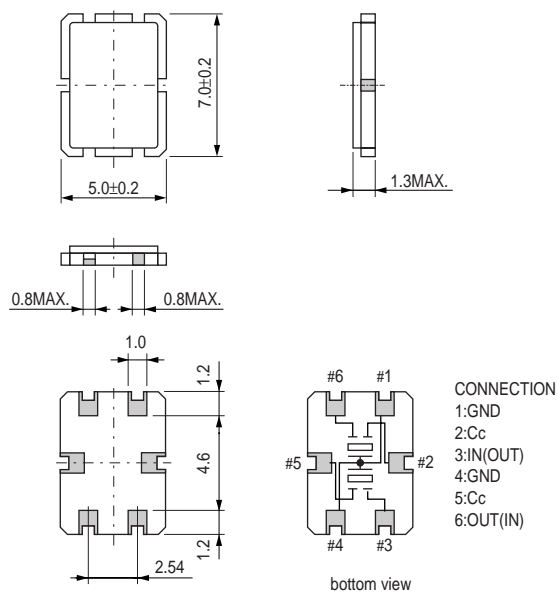

Typical Data

MXF45-15BF-FP4

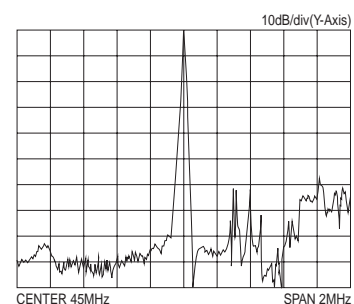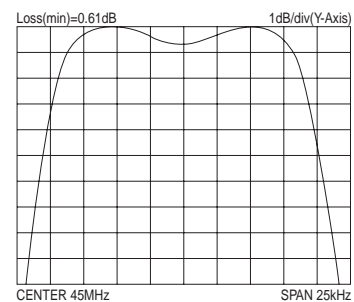

Dimensions(mm)