


BT6 Series

Features

- Compact and thin. (4 pole MCF)
- Emboss taping specification.
- Reflow is possible.

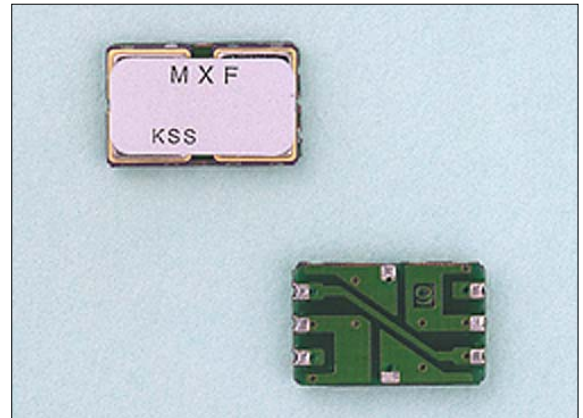

Original Size


Specifications

Type	Number of inner units	Pass Bandwidth		Ripple	Insertion Loss	Stop Bandwidth		Terminating Impedance	Operating Temp.Range
		dB	kHz/MIN	dB MAX	dB MAX	dB	kHz/MAX	Ω //pF	°C
MXF45-7.5BF-BT6	2	3	± 3.75	1	4	25	± 12.5	200//8 Cc(37pF)	-20~+70
MXF45-15BF-BT6	2	3	± 7.5	1	4	30	± 25	300//3 Cc(20pF)	-20~+70
MXF55-8BF-BT6	2	3	± 4	1	5	20	± 12.5	250//5 Cc(20pF)	-20~+70
MXF90-7.5BF-BT6	2	3	± 3.75	1	4	20	± 12.5	500//—2.5 Cc(—3.5pF)	-20~+70


※Taping item packaging : one unit 1,000 pcs

Outline

BT6

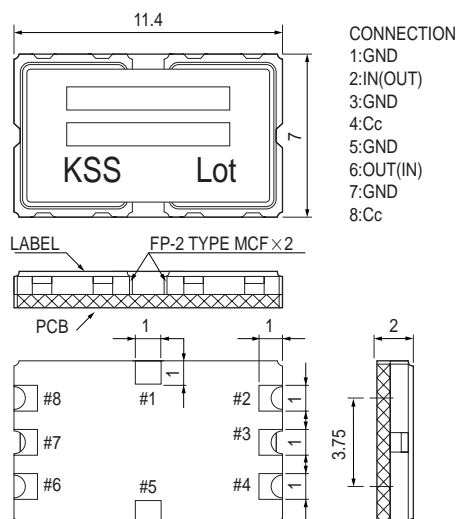

Land Pattern (reference)

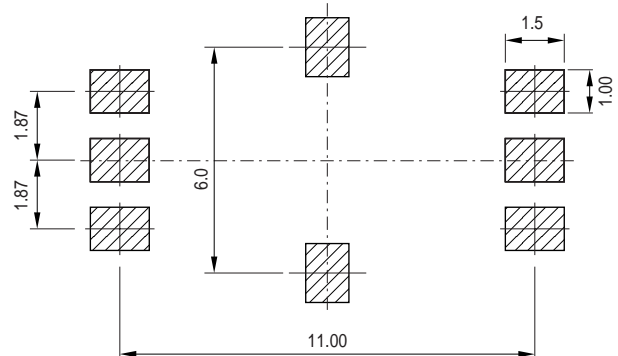

Dimensions(mm)