

Micropower Voltage References

FEATURES

- *Guaranteed* $\pm 4\text{mV}$ initial accuracy LT1004-1.2
- *Guaranteed* $\pm 20\text{mV}$ accuracy LT1004-2.5
- *Guaranteed* $10\mu\text{A}$ operating current
- *Guaranteed* temperature performance
- Operates up to 20mA
- Very low dynamic impedance

APPLICATIONS

- Portable meter references
- Portable test instruments
- Battery operated systems
- Current loop instrumentation

DESCRIPTION


The LT1004 Micropower Voltage References are two terminal bandgap reference diodes designed to provide high accuracy and excellent temperature characteristics at very low operating currents. Optimization of the key parameters in the design, processing and testing of the device results in accuracy specifications previously attainable only with selected units. Below is a distribution plot of reference voltage for a typical lot of LT1004-1.2. Virtually all of the units fall well within the prescribed limits of $\pm 4\text{mV}$.

The LT1004 is a pin for pin replacement for the 385 series of references with improved accuracy specifications. More important, the LT1004 is an attractive device for use in systems where accuracy was previously obtained at the expense of power consumption and trimming.

For a low drift micropower reference with guaranteed temperature coefficient, see the LT1034CS8 data sheet.

3


Micropower Cold Junction Compensation For Thermocouples

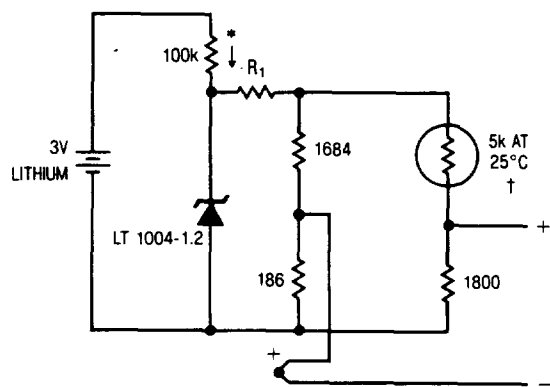

THERMOCOUPLE	
TYPE	R_1
J	233k
K	299k
T	300k
S	2.1M

* QUIESCENT CURRENT $\approx 15\mu\text{A}$
 † YELLOW SPRINGS INST. CO.
 PART #44007
 COMPENSATES WITHIN
 $\pm 1^\circ\text{C}$ FROM 0°C TO 60°C


Typical Distribution of
Reference Voltage (LT1004-1.2)

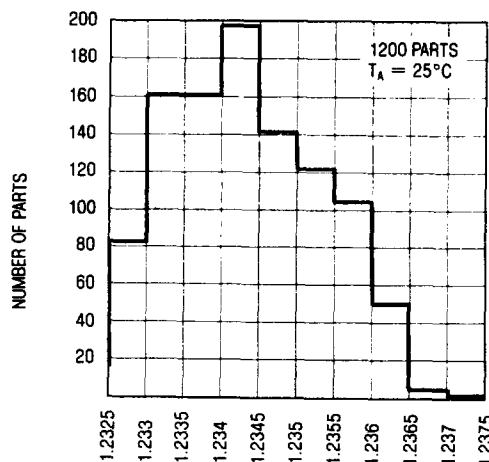

ABSOLUTE MAXIMUM RATINGS

Reverse Breakdown Current. 30mA
Forward Current. 10mA
Operating Temperature Range 0°C to 70°C
Storage Temperature Range. -65°C to 150°C
Lead Temperature (Soldering, 10 sec.). 300°C

PACKAGE/ORDER INFORMATION

	ORDER PART NUMBER
	LT1004CS8-1.2 LT1004CS8-2.5
	PART MARKING
	0412 (1.2V VERSION) 0425 (2.5V VERSION)

ELECTRICAL CHARACTERISTICS (See Note 1)

SYMBOL	PARAMETER	CONDITIONS	LT1004-1.2			LT1004-2.5			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
V_Z	Reverse Breakdown Voltage	$I_R = 100\mu A$ LT1004C 0°C ≤ T_A ≤ 70°C	1.231	1.235	1.239	2.480	2.500	2.520	V
			1.225	1.235	1.245	2.470	2.500	2.530	V
$\frac{\Delta V_Z}{\Delta \text{Temp}}$	Average Temperature Coefficient	$I_{min} \leq I_R \leq 20mA$	20			20			ppm/°C
I_{min}	Minimum Operating Current		8	10		12	20		μA
$\frac{\Delta V_Z}{\Delta I_R}$	Reverse Breakdown Voltage Change with Current	$I_{min} \leq I_R \leq 1mA$	1			1			mV
		$1mA \leq I_R \leq 20mA$	1.5			1.5			mV
			10			10			mV
			20			20			mV
r_Z	Reverse Dynamic Impedance	$I_R = 100\mu A$	0.2	0.6		0.2	0.6		Ω
				1.5			1.5		Ω
e_n	Wide Band Noise (RMS)	$I_R = 100\mu A$ 10Hz ≤ f ≤ 10kHz	60			120			μV
$\frac{\Delta V_Z}{\Delta \text{Time}}$	Long Term Stability	$I_R = 100\mu A$ $T_A = 25^\circ C \pm 0.1^\circ C$	20			20			ppm/kHr

The ● denotes the specifications which apply over the full operating temperature range.

Note 1: All specifications are for $T_A = 25^\circ C$ unless otherwise noted.