

## FEATURES

- **High Accuracy: 0.075% Max**
- **Low Drift: 10ppm/°C Max**
- **Industrial Temperature Range SO-8 Package**
- Low Supply Current: 270μA Max
- Minimum Output Current: 20mA
- No Output Capacitor Required
- Reverse Battery Protection
- Minimum Input/Output Differential: 0.9V
- Available in Small MSOP Package

## APPLICATIONS


- Handheld Instruments
- Precision Regulators
- A/D and D/A Converters
- Power Supplies
- Hard Disk Drives

## DESCRIPTION


The LT<sup>®</sup>1460-10 is a micropower bandgap reference that combines very high accuracy and low drift with low power dissipation and small package size. This series reference uses curvature compensation to obtain a low temperature coefficient and trimmed precision thin-film resistors to achieve high output accuracy. The reference will supply up to 20mA, making it ideal for precision regulator applications, yet it is almost totally immune to input voltage variations.

This series reference provides supply current and power dissipation advantages over shunt references that must idle the entire load current to operate. Additionally, the LT1460-10 does not require an output capacitor, but it is stable with capacitive loads. This feature is important in critical applications where PC board space is a premium or fast settling is demanded. Reverse battery protection keeps the reference from conducting current and being damaged.


The LT1460-10 is available in the 8-lead MSOP, SO, PDIP and the 3-lead TO-92 packages. It is also available in the SOT-23 package; see separate data sheet LT1460S3-10 (SOT-23).

 LTC and LT are registered trademarks of Linear Technology Corporation.

## TYPICAL APPLICATION

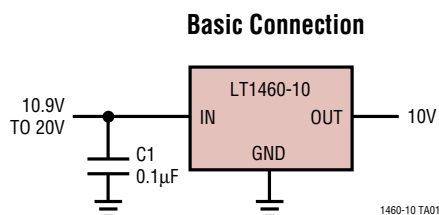

**Typical Distribution of Output Voltage  
S8 Package**

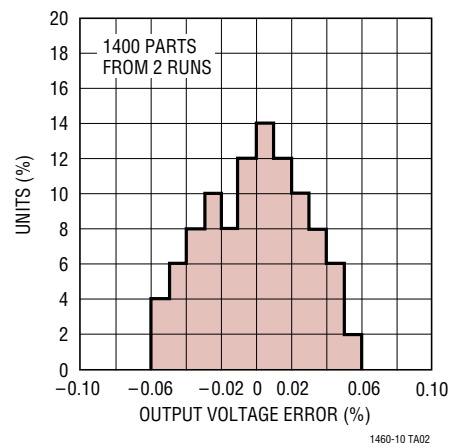

## ABSOLUTE MAXIMUM RATINGS

Input Voltage .....	30V	Storage Temperature Range (Note 1) ...	–65°C to 150°C
Reverse Voltage .....	–15V	Lead Temperature (Soldering, 10 sec) .....	300°C
Output Short-Circuit Duration, $T_A = 25^\circ\text{C}$ .....	5 sec		
Specified Temperature Range			
Commercial .....	0°C to 70°C		
Industrial .....	–40°C to 85°C		

## PACKAGE/ORDER INFORMATION

<p>TOP VIEW</p> <p>MS8 PACKAGE 8-LEAD PLASTIC MSOP</p> <p>*CONNECTED INTERNALLY. DO NOT CONNECT EXTERNAL CIRCUITRY TO THESE PINS</p> <p><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 250^\circ\text{C/W}</math></p>	<p>TOP VIEW</p> <p>N8 PACKAGE 8-LEAD PDIP</p> <p>S8 PACKAGE 8-LEAD PLASTIC SO</p> <p>*CONNECTED INTERNALLY. DO NOT CONNECT EXTERNAL CIRCUITRY TO THESE PINS</p> <p><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 130^\circ\text{C/W}</math> (N8) <math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 190^\circ\text{C/W}</math> (S8)</p>	<p>BOTTOM VIEW</p> <p>Z PACKAGE 3-LEAD TO-92 PLASTIC</p> <p><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 160^\circ\text{C/W}</math></p>
ORDER PART NUMBER	ORDER PART NUMBER	ORDER PART NUMBER
LT1460CCMS8-10 LT1460FCMS8-10	LT1460ACN8-10    LT1460ACS8-10 LT1460BIN8-10    LT1460BIS8-10 LT1460DCN8-10    LT1460DCS8-10 LT1460EIN8-10    LT1460EIS8-10	LT1460GCZ-10 LT1460GIZ-10
MS8 PART MARKING	S8 PART MARKING	
LTAH LTAJ	1460A1    1460D1 460BI1    460EI1	

Consult factory for Military grade parts.

### Available Options

TEMPERATURE	ACCURACY (%)	TEMPERATURE COEFFICIENT (ppm/°C)	PACKAGE TYPE			
			N8	S8	MS8	Z
0°C to 70°C	0.075	10	LT1460ACN8-10	LT1460ACS8-10		
–40°C to 85°C	0.10	10	LT1460BIN8-10	LT1460BIS8-10		
0°C to 70°C	0.10	15			LT1460CCMS8-10	
0°C to 70°C	0.10	20	LT1460DCN8-10	LT1460DCS8-10		
–40°C to 85°C	0.125	20	LT1460EIN8-10	LT1460EIS8-10		
0°C to 70°C	0.15	25			LT1460FCMS8-10	
0°C to 70°C	0.25	25				LT1460GCZ-10
–40°C to 85°C	0.25	25				LT1460GIZ-10

# ELECTRICAL CHARACTERISTICS $V_{IN} = 12.5V$ , $I_{OUT} = 0$ , $T_A = 25^\circ C$ unless otherwise specified.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage (Note 2)	LT1460ACN8, ACS8	9.9925 −0.075	10.000	10.0075 0.075	V %
	LT1460BIN8, BIS8, CCMS8, DCN8, DCS8	9.990 −0.10	10.000	10.010 0.10	V %
	LT1460EIN8, EIS8	9.9875 −0.125	10.000	10.0125 0.125	V %
	LT1460FCMS8	9.985 −0.15	10.000	10.015 0.15	V %
	LT1460GCZ, GIZ	9.975 −0.25	10.000	10.025 0.25	V %
Output Voltage Temperature Coefficient (Note 3)	$T_{MIN} \leq T_J \leq T_{MAX}$ LT1460ACN8, ACS8, BIN8, BIS8	●	5	10	ppm/°C
	LT1460CCMS8	●	7	15	ppm/°C
	LT1460DCN8, DCS8, EIN8, EIS8	●	10	20	ppm/°C
	LT1460FCMS8, GCZ, GIZ	●	12	25	ppm/°C
Line Regulation	$10.9V \leq V_{IN} \leq 12.5V$	●	30	60 80	ppm/V ppm/V
	$12.5V \leq V_{IN} \leq 20V$	●	10	25 35	ppm/V ppm/V
Load Regulation Sourcing (Note 4)	$I_{OUT} = 100\mu A$	●	1500	2800 3500	ppm/mA ppm/mA
	$I_{OUT} = 10mA$	●	80	135 180	ppm/mA ppm/mA
	$I_{OUT} = 20mA$ $0^\circ C$ to $70^\circ C$	●	70	100 140	ppm/mA ppm/mA
Thermal Regulation (Note 5)	$\Delta P = 200mW$		0.5	2.5	ppm/mW
Dropout Voltage (Note 6)	$V_{IN} - V_{OUT}$ , $\Delta V_{OUT} \leq 0.1\%$ , $I_{OUT} = 0$	●		0.9	V
	$V_{IN} - V_{OUT}$ , $\Delta V_{OUT} \leq 0.1\%$ , $I_{OUT} = 10mA$	●		1.3 1.4	V V
Output Current	Short $V_{OUT}$ to GND		40		mA
Reverse Leakage	$V_{IN} = -15V$	●	0.5	10	$\mu A$
Supply Current		●	190	270 360	$\mu A$ $\mu A$
Output Voltage Noise (Note 7)	$0.1Hz \leq f \leq 10Hz$		40		$\mu V_{P-P}$
	$10Hz \leq f \leq 1kHz$		35		$\mu V_{RMS}$
Long-Term Stability of Output Voltage, S8 Pkg (Note 8)			40		ppm/ $\sqrt{kHr}$
Hysteresis (Note 9)	$\Delta T = -40^\circ C$ to $85^\circ C$		160		ppm
	$\Delta T = 0^\circ C$ to $70^\circ C$		25		ppm

The ● denotes specifications which apply over the specified temperature range.

**Note 1:** If the part is stored outside of the specified temperature range, the output may shift due to hysteresis.

**Note 2:** ESD (Electrostatic Discharge) sensitive device. Extensive use of ESD protection devices are used internal to the LT1460-10, however, high electrostatic discharge can damage or degrade the device. Use proper ESD handling precautions.

**Note 3:** Temperature coefficient is measured by dividing the change in output voltage by the specified temperature range. Incremental slope is also measured at  $25^\circ C$ .

**Note 4:** Load regulation is measured on a pulse basis from no load to the specified load current. Output changes due to die temperature change must be taken into account separately.

**Note 5:** Thermal regulation is caused by die temperature gradients created by load current or input voltage changes. This effect must be added to normal line or load regulation. This parameter is not 100% tested.

## ELECTRICAL CHARACTERISTICS

**Note 6:** Excludes load regulation errors.

**Note 7:** Peak-to-peak noise is measured with a single highpass filter at 0.1Hz and a 2-pole lowpass filter at 10Hz. The unit is enclosed in a still-air environment to eliminate thermocouple effects on the leads. The test time is 10 sec. RMS noise is measured with a single highpass filter at 10Hz and a 2-pole lowpass filter at 1kHz. The resulting output is full wave rectified and then integrated for a fixed period, making the final reading an average as opposed to RMS. A correction factor of 1.1 is used to convert from average to RMS and a second correction of 0.88 is used to correct for the nonideal bandpass of the filters.


**Note 8:** Long-term stability typically has a logarithmic characteristic and therefore, changes after 1000 hours tend to be much smaller than before that time. Total drift in the second thousand hours is normally less than

one third that of the first thousand hours with a continuing trend toward reduced drift with time. Significant improvement in long-term drift can be realized by preconditioning the IC with a 100 hour to 200 hour, 125°C burn-in. Long-term stability will also be affected by differential stresses between the IC and the board material created during board assembly. See PC Board Layout in the Applications Information section.

**Note 9:** Hysteresis in output voltage is created by package stress that differs depending on whether the IC was previously at a higher or lower temperature. Output voltage is always measured at 25°C, but the IC is cycled to 85°C or -40°C before successive measurements. Hysteresis is roughly proportional to the square of the temperature change. Hysteresis is not normally a problem for operational temperature excursions where the instrument might be stored at high or low temperature.


## TYPICAL PERFORMANCE CHARACTERISTICS

**Minimum Input/Output Voltage Differential**

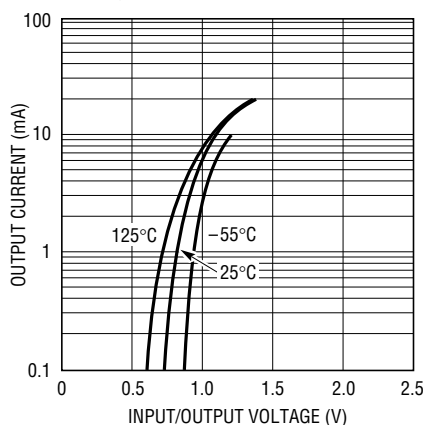


1460-10 G01

**Load Regulation, Sourcing**

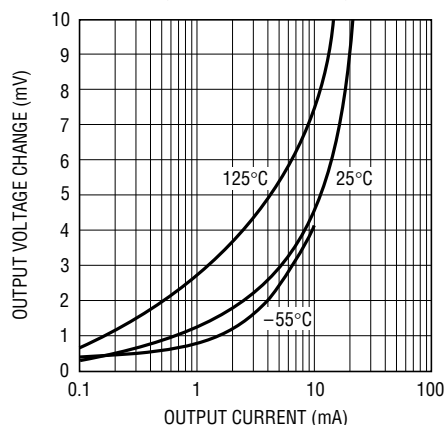


1460-10 G02

**Load Regulation, Sinking**

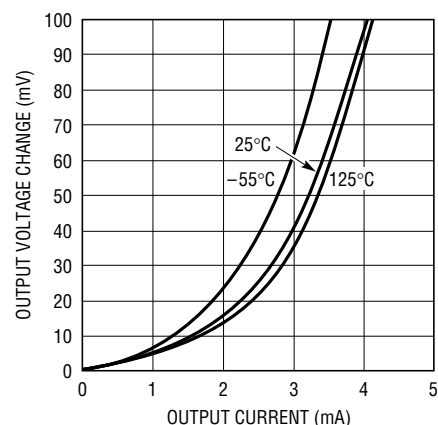


1460-10 G03

**Output Voltage Temperature Drift**

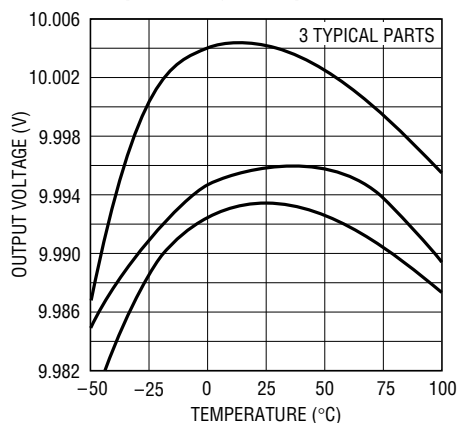


1460-10 G04

**Supply Current vs Input Voltage**

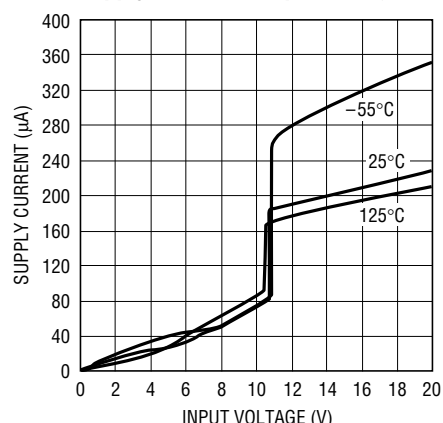

1460-10 G05


**Line Regulation**

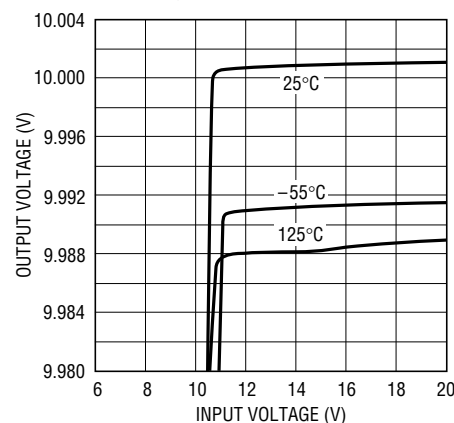


1460-10 G06

# TYPICAL PERFORMANCE CHARACTERISTICS


**Power Supply Rejection Ratio vs Frequency**

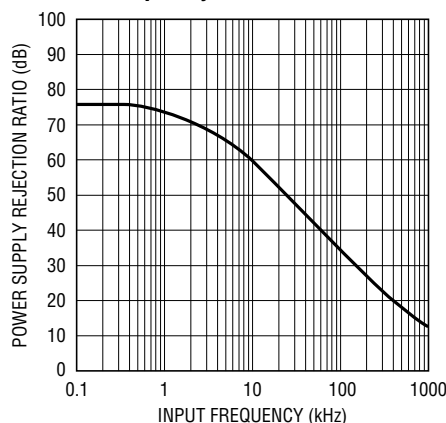


**Output Impedance vs Frequency**

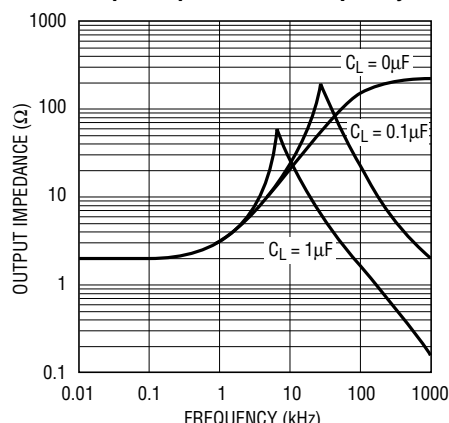


**Transient Responses**

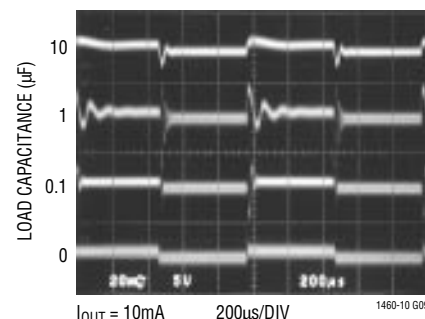

**Output Voltage Noise Spectrum**

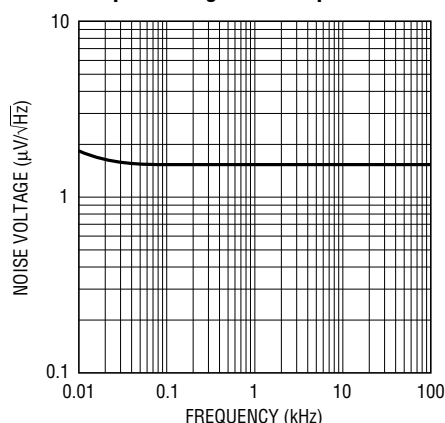

**Output Noise 0.1Hz to 10Hz**

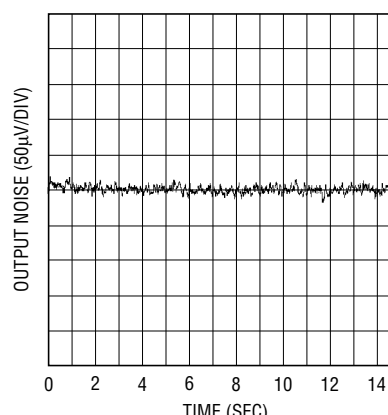

# APPLICATIONS INFORMATION

## Precision Regulator

The LT1460-10 is ideal as a precision regulator, and since it operates in series mode it does not require a current setting resistor. The reference can supply up to 20mA of load current with good transient response. Load regulation at 20mA output is typically 70ppm/mA meaning the output changes only 14mV.

## Capacitive Loads

The LT1460-10 is designed to be stable with capacitive loads. With no capacitive load, the reference is ideal for fast settling or applications where PC board space is a premium. The test circuit shown in Figure 1 is used to measure the response time for various load currents and load capacitors. The 1V step from 10V to 9V produces a

## APPLICATIONS INFORMATION

current step of 1mA or 100 $\mu$ A for  $R_L = 1k$  or  $R_L = 10k$ . Figure 2 shows the response of the reference with no load capacitance.

The reference settles to 10mV (0.1%) in 0.4 $\mu$ s for a 100 $\mu$ A pulse and to 0.1% in 0.8 $\mu$ s with a 1mA step. When load capacitance is greater than 0.01 $\mu$ F, the reference begins to ring due to the pole formed with the output impedance.

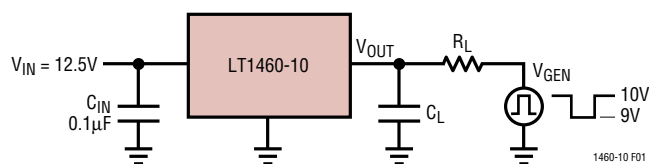


Figure 1. Response Time Test Circuit

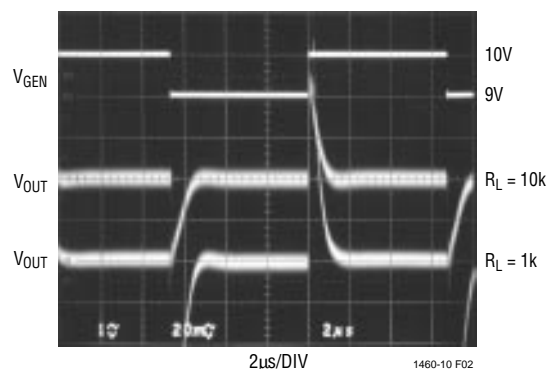


Figure 2.  $C_L = 0$

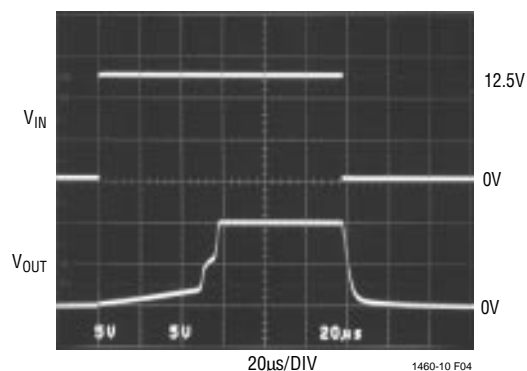


Figure 4.  $C_{IN} = 0$

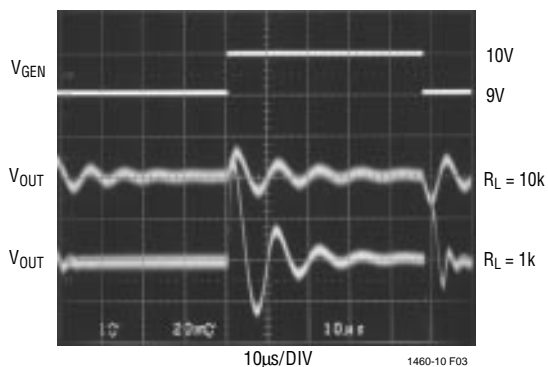


Figure 3.  $C_L = 0.01\mu F$

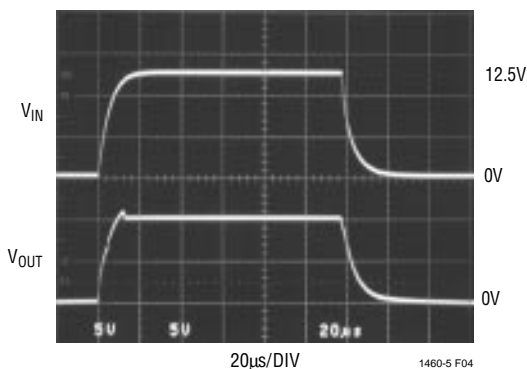


Figure 5.  $C_{IN} = 0.1\mu F$

Figure 3 shows the response of the reference to a 1mA and 100 $\mu$ A load with a 0.01 $\mu$ F load capacitor.

### Fast Turn-On

It is recommended to add a 0.1 $\mu$ F or larger input capacitor to the input pin of the LT1460-10. This helps stability with large load currents and speeds up turn-on. The LT1460-10 can start in 10 $\mu$ s, but it is important to limit the dv/dt of the input. Under light load conditions and with a very fast input, internal nodes overshoot and this requires finite recovery time. Figure 4 shows the result of no bypass capacitance on the input and no output load. In this case the supply dv/dt is 12.5V in 30ns which causes internal overshoot, and the output does not bias to 10V until 60 $\mu$ s. A 0.1 $\mu$ F input capacitor guarantees the part always starts quickly as shown in Figure 5.

## APPLICATIONS INFORMATION

### Output Accuracy

Like all references, either series or shunt, the error budget of the LT1460-10 is made up of primarily three components: initial accuracy, temperature coefficient and load regulation. Line regulation is neglected because it typically contributes only 30ppm/V, or 300 $\mu$ V for a 1V input change. The LT1460-10 typically shifts less than 0.01% when soldered into a PCB, so this is also neglected (see PC Board Layout section). The output errors are calculated as follows for a 100 $\mu$ A load and 0°C to 70°C temperature range:

#### LT1460AC

Initial accuracy = 0.075%

For  $I_O = 100\mu\text{A}$ ,

$$\Delta V_{\text{OUT}} = \left( \frac{3500\text{ppm}}{\text{mA}} \right) (0.1\text{mA}) (10\text{V}) = 3.5\text{mV}$$

which is 0.035%.

For temperature 0°C to 70°C the maximum  $\Delta T = 70^\circ\text{C}$ ,

$$\Delta V_{\text{OUT}} = \left( \frac{10\text{ppm}}{^\circ\text{C}} \right) (70^\circ\text{C}) (10\text{V}) = 7\text{mV}$$

which is 0.07%.

Total worst-case output error is:

$$0.075\% + 0.035\% + 0.070\% = 0.180\%.$$

Table 1 gives worst-case accuracy for the LT1460AC, CC, DC, FC, GC from 0°C to 70°C and the LT1460BI, EI, GI from -40°C to 85°C.

### PC Board Layout

In 13- to 16-bit systems where initial accuracy and temperature coefficient calibrations have been done, the mechanical and thermal stress on a PC board (in a cardage

for instance) can shift the output voltage and mask the true temperature coefficient of a reference. In addition, the mechanical stress of being soldered into a PC board can cause the output voltage to shift from its ideal value. Surface mount voltage references (MS8 and S8) are the most susceptible to PC board stress because of the small amount of plastic used to hold the lead frame.

A simple way to improve the stress-related shifts is to mount the reference near the short edge of the PC board, or in a corner. The board edge acts as a stress boundary, or a region where the flexure of the board is minimum. The package should always be mounted so that the leads absorb the stress and not the package. The package is generally aligned with the leads parallel to the long side of the PC board as shown in Figure 7a.

A qualitative technique to evaluate the effect of stress on voltage references is to solder the part into a PC board and deform the board a fixed amount as shown in Figure 6. The flexure #1 represents no displacement, flexure #2 is concave movement, flexure #3 is relaxation to no displacement and finally, flexure #4 is a convex movement. This motion is repeated for a number of cycles and the relative output deviation is noted. The result shown in Figure 7a is for two LT1460S8-10s mounted vertically and Figure 7b is for two LT1460S8-10s mounted horizontally. The parts oriented in Figure 7a impart less stress into the package because stress is absorbed in the leads. Figures 7a and 7b show the deviation to be between 500 $\mu$ V and




Figure 6. Flexure Numbers

$I_{\text{OUT}}$	LT1460AC	LT1460BI	LT1460CC	LT1460DC	LT1460EI	LT1460FC	LT1460GC	LT1460GI
0	0.145%	0.225%	0.205%	0.240%	0.375%	0.325%	0.425%	0.562%
100 $\mu$ A	0.180%	0.260%	0.240%	0.275%	0.410%	0.360%	0.460%	0.597%
10mA	0.325%	0.405%	0.385%	0.420%	0.555%	0.505%	0.605%	0.742%
20mA	0.425%	N/A	0.485%	0.520%	N/A	0.605%	0.705%	N/A


## APPLICATIONS INFORMATION

1mV and implies a 50ppm and 100ppm change respectively. This corresponds to a 13- to 14-bit system and is not a problem for most 10- to 12-bit systems unless the system has a calibration. In this case, as with temperature hysteresis, this low level can be important and even more careful techniques are required.


The most effective technique to improve PC board stress is to cut slots in the board around the reference to serve as a strain relief. These slots can be cut on three sides of the

reference and the leads can exit on the fourth side. This “tongue” of PC board material can be oriented in the long direction of the board to further reduce stress transferred to the reference.


The results of slotting the PC boards of Figures 7a and 7b are shown in Figures 8a and 8b. In this example the slots can improve the output shift from about 100ppm to nearly zero.

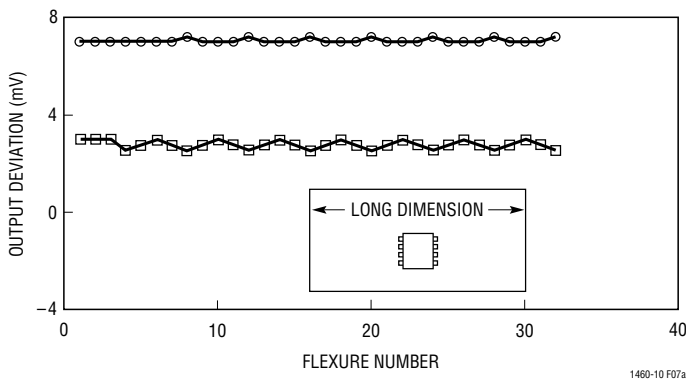


**Figure 7a. Two Typical LT1460S8-10s, Vertical Orientation Without Slots**

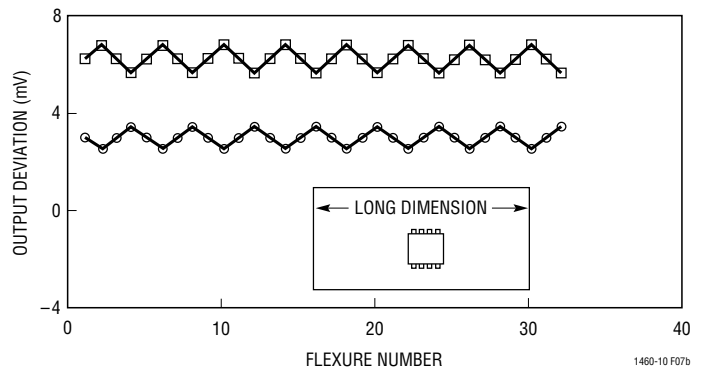

**Figure 7b. Two Typical LT1460S8-10s, Horizontal Orientation Without Slots**

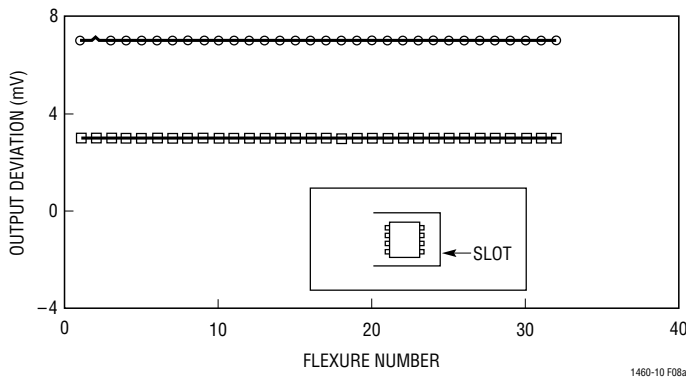


**Figure 8a. Same Two LT1460S8-10s in Figure 7a, but With Slots**

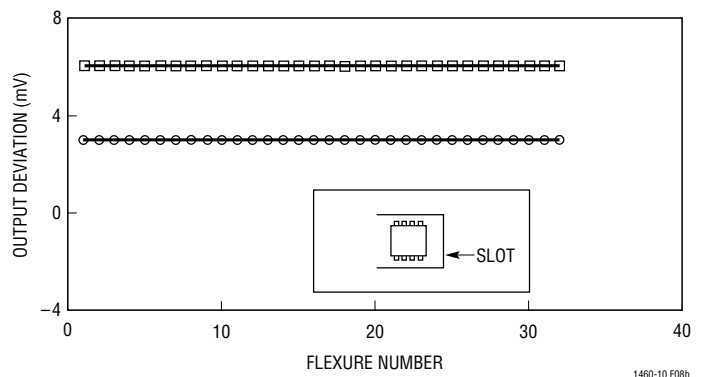

**Figure 8b. Same Two LT1460S8-10s in Figure 7b, but With Slots**




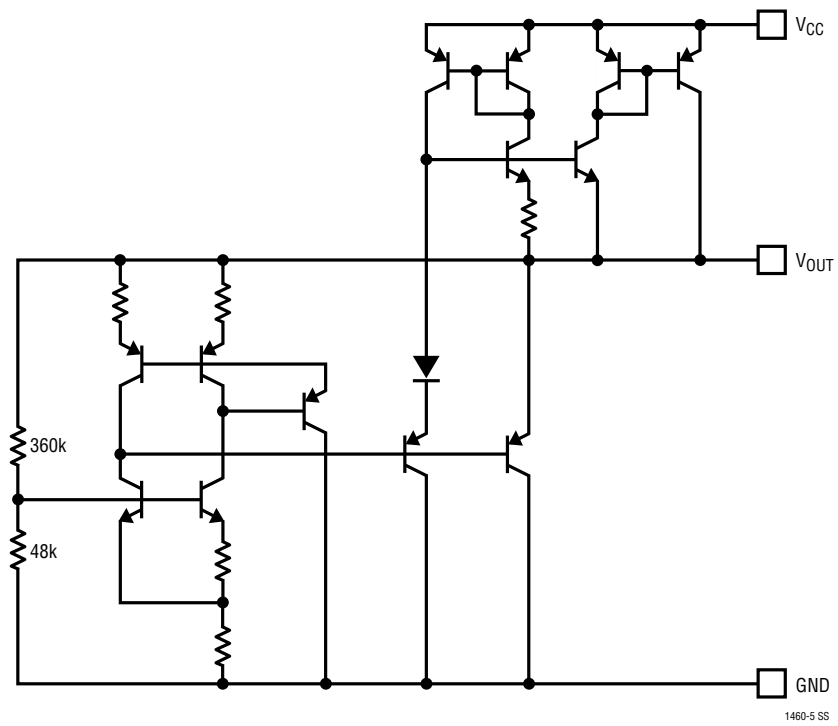


## PACKAGE DESCRIPTION

Dimensions in inches (millimeters) unless otherwise noted.

### MS8 Package 8-Lead Plastic MSOP (LTC DWG # 05-08-1660)

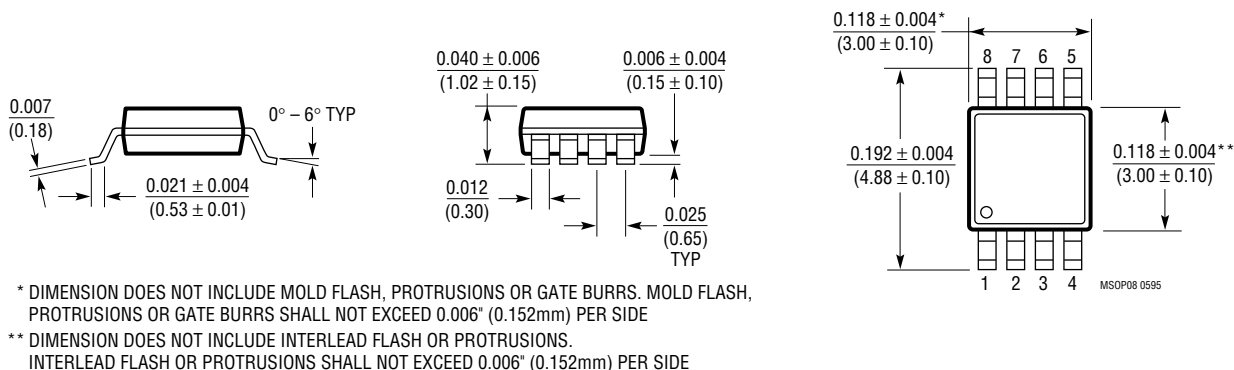

### N8 Package 8-Lead PDIP (Narrow 0.300) (LTC DWG # 05-08-1510)

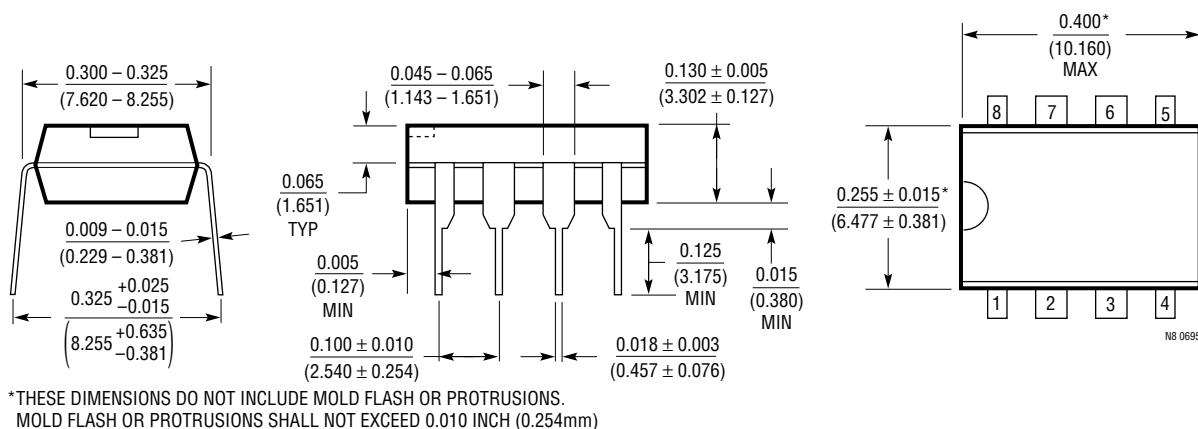


## PACKAGE DESCRIPTION

**Dimensions in inches (millimeters) unless otherwise noted.**


**S8 Package**  
**8-Lead Plastic Small Outline (Narrow 0.150)**

(LTC DWG # 05-08-1610)

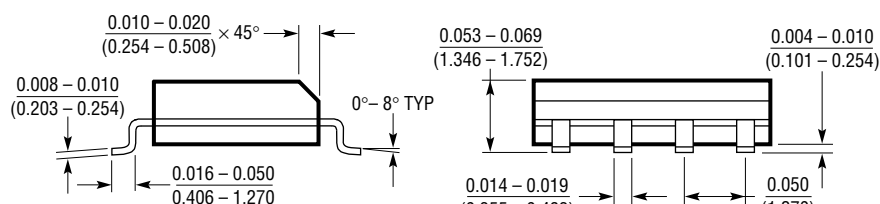


\* DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE

**\*\* DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE**

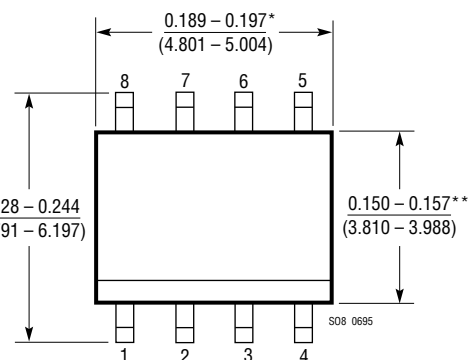


**Z Package**  
**3-Lead Plastic TO-92 (Similar to TO-226)**

(LTC DWG # 05-08-1410)

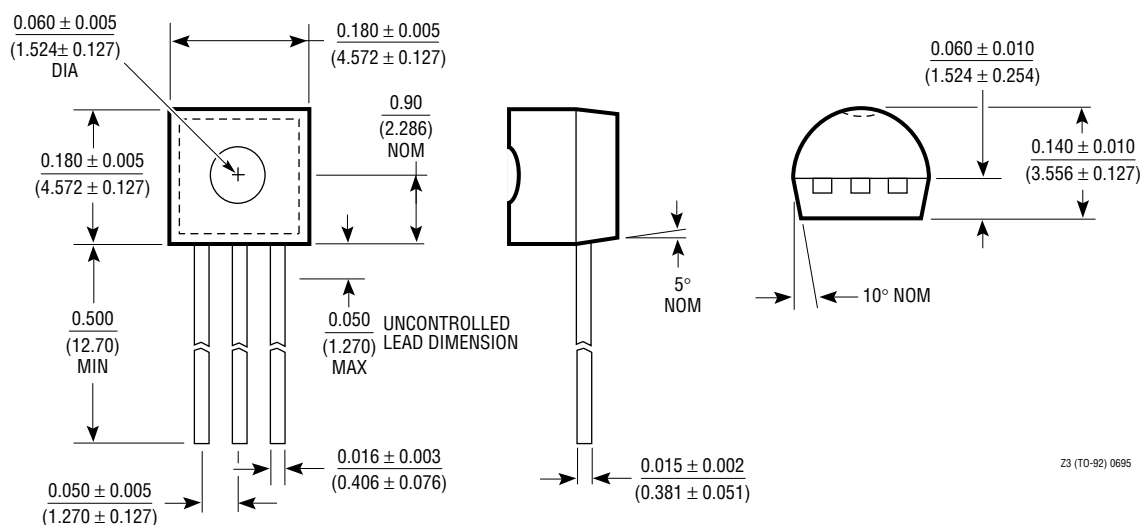


TYPICAL APPLICATIONS

Boosted Output Current with No Current Limit

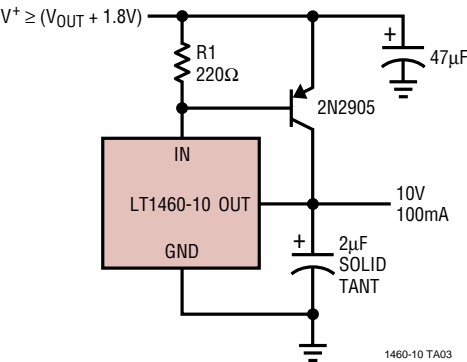

1460-10 TA03


Boosted Output Current with Current Limit

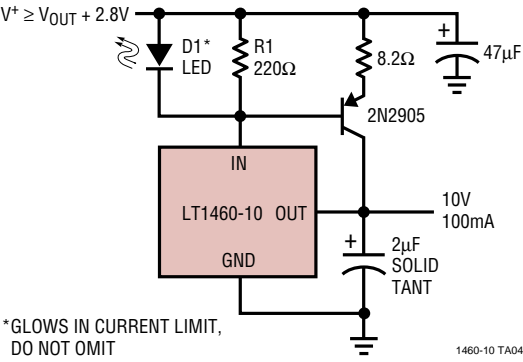

\*GLOWS IN CURRENT LIMIT,  
DO NOT OMIT

1460-10 TA04

Handling Higher Load Currents

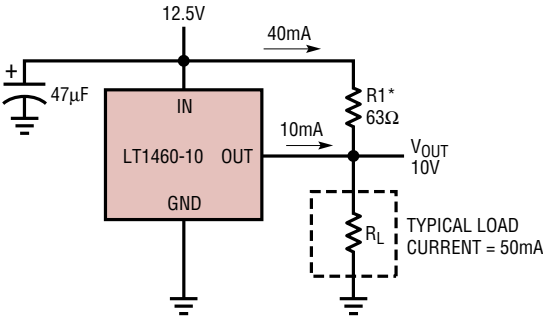

\*SELECT R1 TO DELIVER 80% OF TYPICAL LOAD CURRENT.  
LT1460 WILL THEN SOURCE AS NECESSARY TO MAINTAIN  
PROPER OUTPUT. DO NOT REMOVE LOAD AS OUTPUT WILL  
BE DRIVEN UNREGULATED HIGH. LINE REGULATION IS  
DEGRADED IN THIS APPLICATION

1460-10 TA05

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1019	Precision Bandgap Reference	0.05% Max, 5ppm/°C Max
LT1236	Precision Low Noise Reference	0.05% Max, 5ppm/°C Max, SO Package
LT1634	Micropower Precision Shunt Reference	0.05%, Max, 25ppm/°C Max