

# Micropower Precision Triple Supply Monitor with Push-Pull Reset Output in a 5-Lead SOT-23 Package

March 2000

## FEATURES

- **Monitors Three Inputs Simultaneously:**  
**3V, 1.8V and Adjustable**
- **±1.5% Threshold Accuracy Over Temperature**
- **Very Low Supply Current: 10µA Typ**
- 200ms Reset Time Delay
- Power Supply Glitch Immunity
- Guaranteed  $\overline{\text{RESET}}$  for  $V_{CC3} \geq 1V$  or  $V_{CC18} \geq 1V$
- **3V Active-Low Push-Pull Reset Output**
- 5-Lead SOT-23 Package

## APPLICATIONS

- Desktop Computers
- Notebook Computers
- Intelligent Instruments
- Portable Battery-Powered Equipment
- Network Servers

## DESCRIPTION

The LTC<sup>®</sup>1985-1.8 is a triple supply monitor intended for systems with multiple supply voltages. The reset output remains low until all three supplies have been in compliance for 200ms. Tight 1.5% accuracy specifications and glitch immunity ensure reliable reset operation without false triggering.

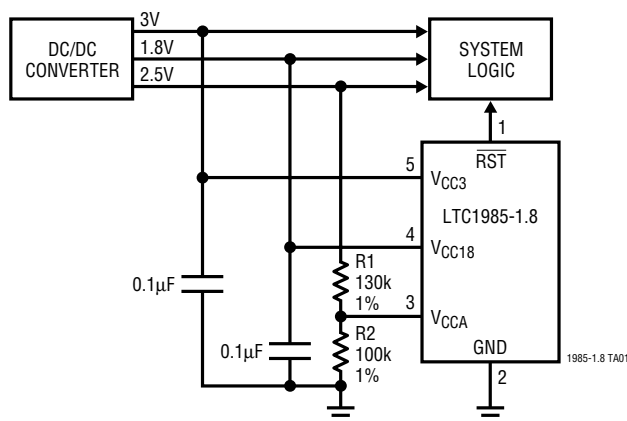
The  $\overline{\text{RST}}$  output is guaranteed to be in the correct state for  $V_{CC18}$  or  $V_{CC3}$  down to 1V. The LTC1985 may also be configured to monitor any one or two  $V_{CC}$  inputs instead of three, depending on system requirements.

Very low (10µA typical) supply current makes the LTC1985 ideal for power conscious systems.

The LTC1985 is available in a 5-lead SOT-23 package.

**LT**, LTC and LT are registered trademarks of Linear Technology Corporation.

## TYPICAL APPLICATION



## ABSOLUTE MAXIMUM RATINGS


(Notes 1, 2)

 $V_{CC3}$ ,  $V_{CC18}$ ,  $V_{CCA}$  .....  $-0.3V$  to  $7V$  $\overline{RST}$  .....  $-0.3V$  to  $(V_{CC3} + 0.3V)$ 

Operating Temperature Range

(Note 3) .....  $-40^{\circ}C$  to  $85^{\circ}C$ Storage Temperature Range .....  $-65^{\circ}C$  to  $150^{\circ}C$ Lead Temperature (Soldering, 10 sec) .....  $300^{\circ}C$ 
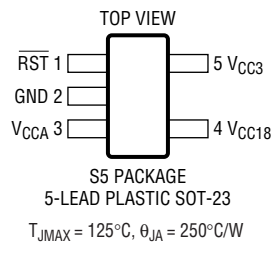
## PACKAGE/ORDER INFORMATION

	ORDER PART NUMBER
	LTC1985ES5-1.8
	S5 PART MARKING
	LTNM

Consult factory for Industrial and Military grade parts.

## ELECTRICAL CHARACTERISTICS

The ● denotes specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^{\circ}C$ .  $V_{CC3} = 3V$ ,  $V_{CC18} = 1.8V$ ,  $V_{CCA} = V_{CC3}$  unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
$V_{RT3}$	Reset Threshold $V_{CC3}$	$V_{CC3}$ Input Threshold	● 2.760	2.805	2.850	V
$V_{RT18}$	Reset Threshold $V_{CC18}$	$V_{CC18}$ Input Threshold	● 1.656	1.683	1.710	V
$V_{RTA}$	Reset Threshold $V_{CCA}$	$V_{CCA}$ Input Threshold	● 0.985	1.000	1.015	V
$V_{CCOP}$	$V_{CC3}$ , $V_{CC18}$ Operating Voltage	$\overline{RST}$ in Correct Logic State	● 1		7	V
$I_{VCC3}$	$V_{CC3}$ Supply Current	$V_{CC18} > V_{CC3}$ $V_{CC18} < V_{CC3}$ , $V_{CC3} = 3V$ (Note 4)	●	1 10	2 20	$\mu A$ $\mu A$
$I_{VCC18}$	$V_{CC18}$ Supply Current	$V_{CC18} < V_{CC3}$ , $V_{CC18} = 1.8V$ (Note 4)	●	1	2	$\mu A$
$I_{VCCA}$	$V_{CCA}$ Input Current	$V_{CCA} = 1V$	● -15	0	15	nA
$t_{RST}$	Reset Pulse Width	$\overline{RST}$ Low	● 140	200	280	ms
$t_{UV}$	$V_{CC}$ Undervoltage Detect to $\overline{RST}$	$V_{CC18}$ , $V_{CC3}$ or $V_{CCA}$ Less Than Reset Threshold $V_{RT}$ by More Than 1%		110		$\mu s$
$V_{OL}$	Output Voltage Low, $\overline{RST}$	$I_{SINK} = 2.5mA$ , $V_{CC3} = 3V$ , $V_{CC18} = 0V$ $I_{SINK} = 100\mu A$ , $V_{CC3} = 1V$ , $V_{CC18} = 0V$ $I_{SINK} = 100\mu A$ , $V_{CC3} = 0V$ , $V_{CC18} = 1V$ $I_{SINK} = 100\mu A$ , $V_{CC3} = 1V$ , $V_{CC18} = 1V$	● ● ● ●	0.15 0.05 0.05 0.05	0.4 0.3 0.3 0.3	V V V V
$V_{OH}$	Output Voltage High, $\overline{RST}$	$I_{SOURCE} = 200\mu A$	● 0.8	$V_{CC3}$		V

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of the device may be impaired.


**Note 2:** All voltage values are with respect to GND.

**Note 3:** The LTC1985E is guaranteed to meet specified performance from  $0^{\circ}C$  to  $70^{\circ}C$  and is designed, characterized and assured to meet the


extended temperature limits of  $-40^{\circ}C$  to  $85^{\circ}C$  but are not tested at these temperatures.

**Note 4:** Both  $V_{CC3}$  and  $V_{CC18}$  can act as the supply depending on which pin has the greatest potential.

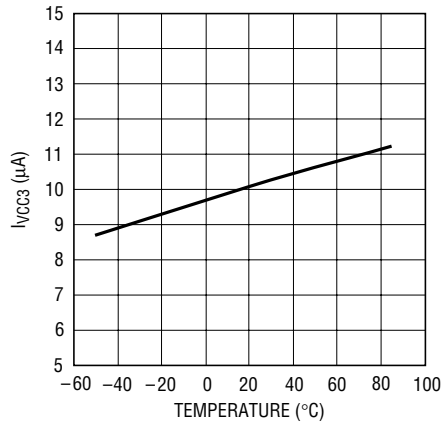
# TYPICAL PERFORMANCE CHARACTERISTICS

**I<sub>VCC3</sub> vs Temperature**

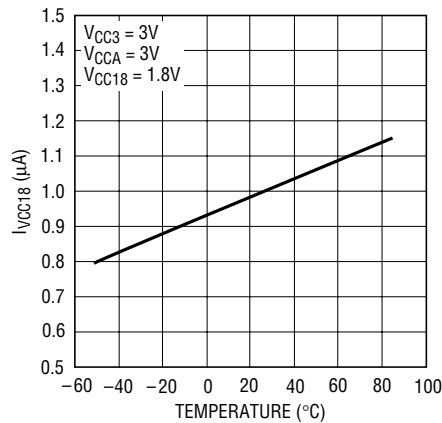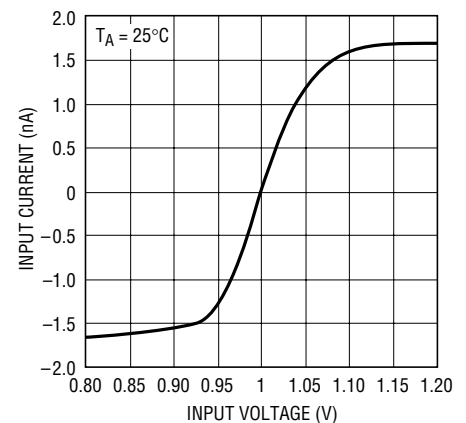
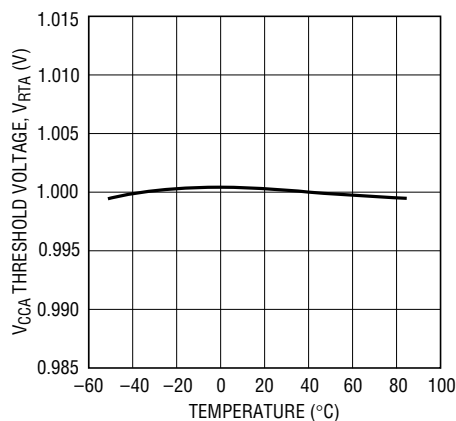
1985-18 G01

**I<sub>VCC18</sub> vs Temperature**


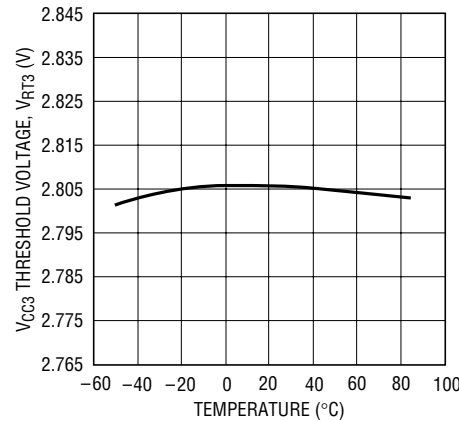
1985-18 G02

**V<sub>CCA</sub> Input Current vs Input Voltage**


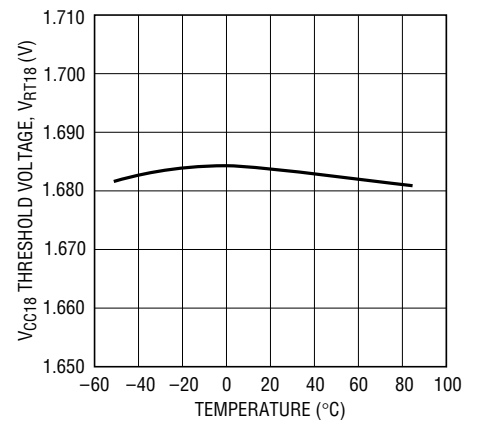
1985-18 G03

**V<sub>CCA</sub> Threshold Voltage vs Temperature**


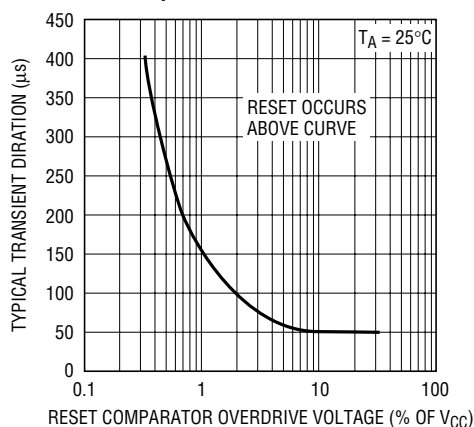
1985-18 G04

**V<sub>CC3</sub> Threshold Voltage vs Temperature**


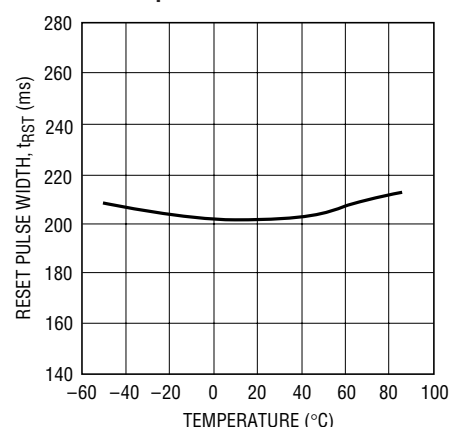
1985-18 G05

**V<sub>CC18</sub> Threshold Voltage vs Temperature**


1985-18 G06

**Typical Transient Duration vs Comparator Overdrive**


1985-18 G07

**Reset Pulse Width vs Temperature**


1985-18 G08

## PIN FUNCTIONS

**RST (Pin 1):** Reset Logic Output. Active low, 3V push-pull output. Asserted when one or all of the supplies are below trip thresholds and held for 200ms after all supplies become valid.

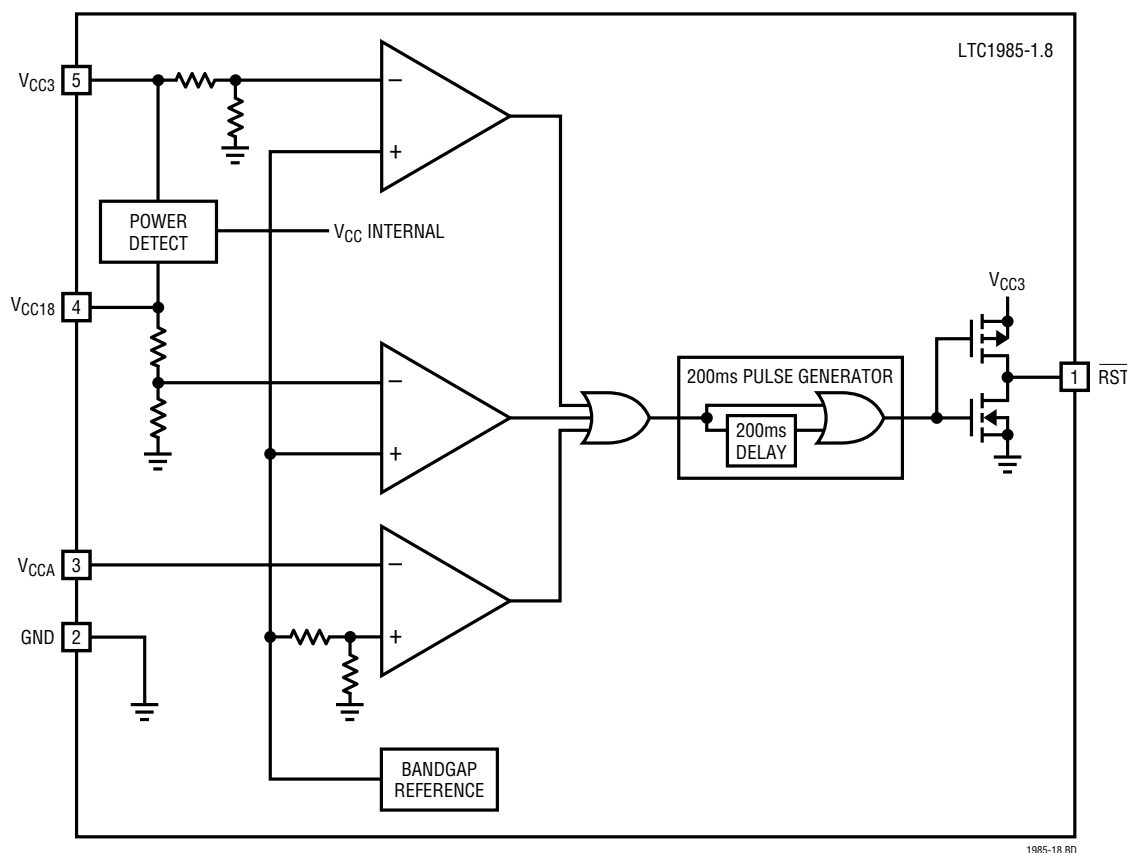
**GND (Pin 2):** Ground.

**V<sub>CCA</sub> (Pin 3):** 1V Sense, High Impedance Input. If unused it can be tied to either V<sub>CC3</sub> or V<sub>CC18</sub>.


**V<sub>CC18</sub> (Pin 4):** 1.8V Sense Input and Power Supply Pin. This pin is used on the LTC1985 to provide power to the part when the voltage on V<sub>CC18</sub> is greater than the voltage on V<sub>CC3</sub>. Bypass to ground with a  $\geq 0.1\mu\text{F}$  ceramic capacitor.

**V<sub>CC3</sub> (Pin 5):** 3V Sense Input and Power Supply Pin. This pin provides power to the part when the voltage on V<sub>CC3</sub> is greater than the voltage on V<sub>CC18</sub>. Bypass to ground with a  $\geq 0.1\mu\text{F}$  ceramic capacitor.

## BLOCK DIAGRAM



## TIMING DIAGRAM

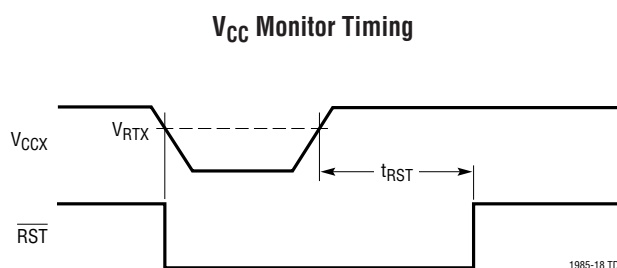

## APPLICATIONS INFORMATION

### Supply Monitoring

The LTC1985 is a low power, high accuracy triple supply monitoring circuit with a single 200ms microprocessor reset output.

All three V<sub>CC</sub> inputs must be above predetermined thresholds for reset not to be invoked. The LTC1985 will assert reset during power-up, power-down and brownout conditions on any one or all of the V<sub>CC</sub> inputs.

### 3V or 1.8V Power Detect

The LTC1985 is powered from the 3V input pin (V<sub>CC3</sub>) or the 1.8V input pin (V<sub>CC18</sub>), whichever pin has the highest potential. This ensures the part pulls the RST pin low as soon as either input pin is  $\geq 1V$ .

### Power-Up

Upon power-up, either the V<sub>CC18</sub> or V<sub>CC3</sub> pin, can power the part. This ensures that RST will be low when either V<sub>CC18</sub> or V<sub>CC3</sub> reaches 1V. As long as any one of the V<sub>CC</sub> inputs is below its predetermined threshold, RST will stay a logic low. Once all of the V<sub>CC</sub> inputs rise above their

thresholds, an internal timer is started and RST is released after 200ms.

RST is reasserted whenever any one of the V<sub>CC</sub> inputs drops below its predetermined threshold and remains asserted until 200ms after all of the V<sub>CC</sub> inputs are above their thresholds.

### Power-Down

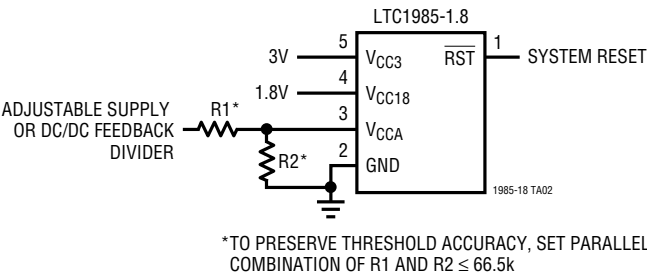
On power-down, once any of the V<sub>CC</sub> inputs drop below its threshold, RST is held at a logic low. A logic low of 0.3V is guaranteed until both V<sub>CC3</sub> and V<sub>CC18</sub> drop below 1V.

### Override Functions


The V<sub>CCA</sub> pin, if unused, can be tied to either V<sub>CC3</sub> or V<sub>CC18</sub>. This is an obvious solution since the trip points for V<sub>CC3</sub> and V<sub>CC18</sub> will always be greater than the trip point for V<sub>CCA</sub>. Likewise, the V<sub>CC18</sub>, if unused, can be tied to V<sub>CC3</sub>. V<sub>CC3</sub> must always be used. Tying V<sub>CC3</sub> to V<sub>CC18</sub> and operating off of a 1.8V supply will result in the continuous assertion of RST.

TYPICAL APPLICATIONS


Triple Supply Monitor (3V, 1.8V and Adjustable)





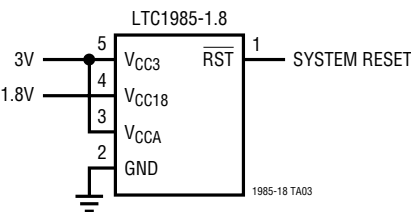
Dual Supply Monitor (3V and 1.8V, Defeat  $V_{CCA}$  Input)



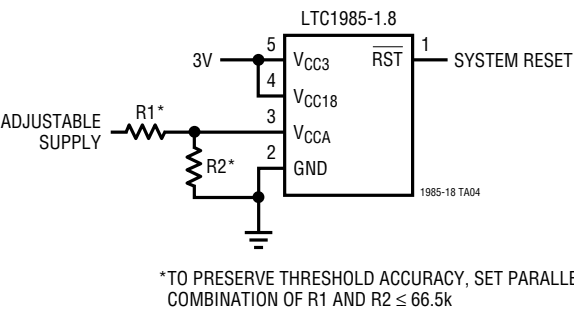Dual Supply Monitor (3V Plus Adjustable)




## TYPICAL APPLICATIONS

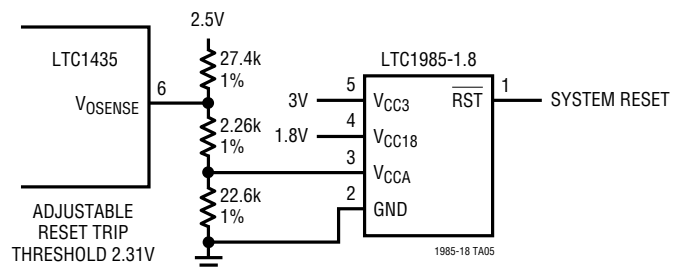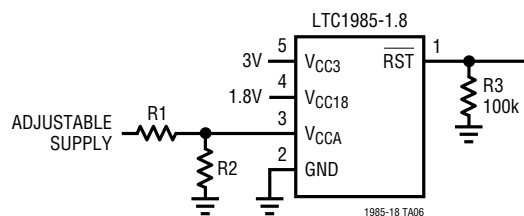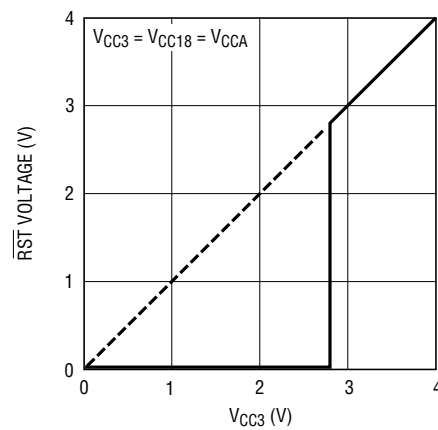Using  $V_{CCA}$  Tied to DC/DC Feedback DividerResistor on  $\overline{\text{RST}}$  Output to Ground Ensures  $\overline{\text{RST}}$  Valid to  $V_{CC} = 0\text{V}$ Typical Application Showing Resistor on  $\overline{\text{RST}}$  Output to Ground $\overline{\text{RST}}$  Voltage vs  $V_{CC3}$  with a Resistor on  $\overline{\text{RST}}$  to Ground

1985-18 TA06b


## TYPICAL APPLICATION
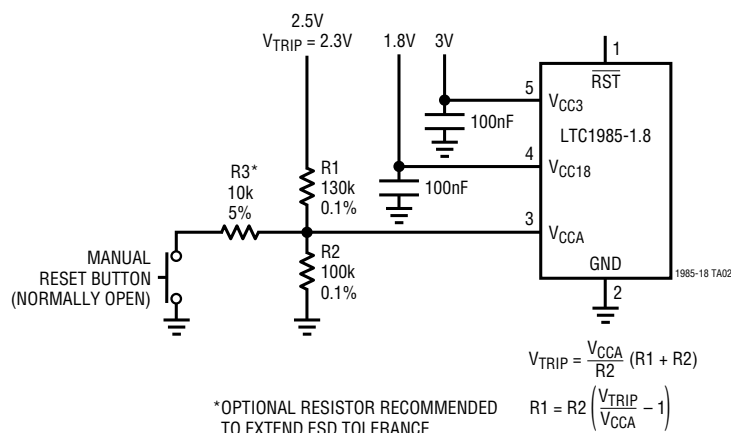
## Triple Supply Monitor with Manual Reset Button



## PACKAGE DESCRIPTION

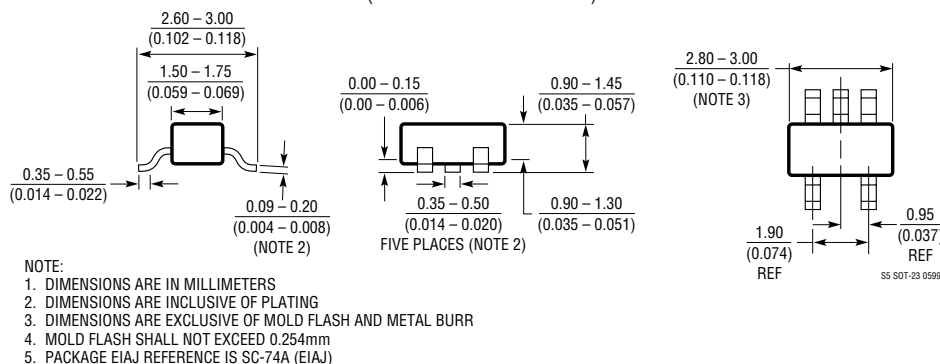Dimensions in inches (millimeters) unless otherwise noted.

**S5 Package**  
**5-Lead Plastic SOT-23**  
 (LTC DWG # 05-08-1633)


## RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LTC690	5V Supply Monitor, Watchdog Timer and Battery Backup	4.65V Threshold
LTC694-3.3	3.3V Supply Monitor, Watchdog Timer and Battery Backup	2.9V Threshold
LTC699	5V Supply Monitor and Watchdog Timer	4.65V Threshold
LTC1232	5V Supply Monitor, Watchdog Timer and Push-Button Reset	4.37V/4.62V Threshold
LTC1326	Micropower Precision Triple Supply Monitor for 5V, 3.3V and ADJ	4.725V, 3.118V, 1V Thresholds ( $\pm 0.75\%$ )
LTC1326-2.5	Micropower Precision Triple Supply Monitor for 2.5V, 3.3V and ADJ	2.363V, 3.118V, 1V Thresholds ( $\pm 0.75\%$ )
LTC1536	Precision Triple Supply Monitor for PCI Applications	Meets PCI $t_{FAIL}$ Timing Specifications
LTC1726-25	Micropower Triple Supply Monitor for 2.5V, 3.3V and ADJ	Adjustable RESET and Watchdog Time Outs
LTC1726-5	Micropower Triple Supply Monitor for 5V, 3.3V and ADJ	Adjustable RESET and Watchdog Time Outs
LTC1727	Micropower Triple Supply Monitor	Individual Monitor Outputs
LTC1728	Micropower Triple Supply Monitor	5-Lead SOT-23 Package