


PIN Diode Chips

V 2.00

Features

- CERMACHIP™ (glass) or Silicon Dioxide Passivation
- Hermetically Sealed CERMACHIP Design
- Fast Speed, Low Loss Microwave Chips
- Attenuator Chips
- Voltage Ratings to 1500 Volts
- Wide Range of PIN Characteristics



Description

M/A-COM offers a comprehensive product line of silicon PIN diode chips covering a wide range of performance characteristics for use in hybrid integrated circuits. PIN diode chips designed for fast switching speed, low loss microwave applications and for high power, high voltage RF applications are available.

The small size and low parasitics of PIN diode chips allow for the design of miniature, broadband microwave circuits particularly useful in microstrip assemblies. These devices combine M/A-COM's latest design technology and long experience as a manufacturer of PIN diodes.

M/A-COM's PIN diode chips have gold contact surfaces, with the cathode surface as the bottom contact.

The low capacitance PIN diode chips have a mesa construction and are passivated with silicon dioxide. Capacitance values range from 0.05 pF. These devices are designed with thin I region widths and short carrier lifetime for fast switching speed microwave circuits.

The attenuator PIN diode chips have a mesa construction and are passivated with CERMACHIP glass. Because of their thick intrinsic region and well controlled resistance current characteristics, these devices are well suited for low distortion attenuator circuits.

The general purpose PIN diode chips are silicon dioxide passivated mesa structures. They are also available in hermetically sealed packages as described in the packaged PIN diode section. These diodes encompass a wide range of characteristics with voltage ratings from 50 to 250 volts.

M/A-COM's CERMACHIP PIN diode chips employ M/A-COM's unique hard glass passivation, covering the entire active surface of the PIN diode junction. This results in an hermetically sealed chip that has been qualified for many high reliability military and space programs. The CERMACHIP PIN chips are available with voltage ratings up to 1,500 volts and are capable of controlling kilowatts of power.

CERMACHIP is a trademark of M/A-COM, Inc.
Specifications Subject to Change Without Notice.

M/A-COM, Inc.

| | | | | | |
|----------------|---------------------|-----------------|-------------------------|-----------|-------------------------|
| North America: | Tel. (800) 366-2266 | ■ Asia/Pacific: | Tel. +81 (03) 3226-1671 | ■ Europe: | Tel. +44 (1344) 869 595 |
| | Fax (800) 618-8883 | | Fax +81 (03) 3226-1451 | | Fax +44 (1344) 300 020 |

Low Capacitance PIN Diode Chips

Specifications @ $T_A = +25^\circ\text{C}$

| Model ¹ Number | Voltage ² Rating (Volts) | Maximum ³ C _j @ 10V (pF) | Maximum ⁴ R _s @ 10 mA (Ohms) | Nominal Characteristics | | |
|------------------------------|---|--|--|--|--|-------------------------------|
| | | | | Carrier ⁵ Lifetime (ns) | Reverse ⁶ Recovery Time (ns) | Contact Diameter (mils) |
| MA4P150 | 20 | 0.10 | 1.5 | 10 | 2 | 1.5 |
| MA4P151 | 30 | 0.05 | 2.0 | 10 | 2 | 1.5 |
| MA4P152 | 30 | 0.10 | 1.5 | 10 | 2 | 2.0 |
| MA4P153 | 30 | 0.15 | 1.2 | 10 | 2 | 2.0 |
| MA4P154 | 30 | 0.20 | 1.0 | 10 | 2 | 2.0 |
| MA4P155 | 40 | 0.05 | 2.0 | 15 | 4 | 1.5 |
| MA4P156 | 40 | 0.10 | 1.5 | 15 | 4 | 1.5 |
| MA4P157 | 60 | 0.10 | 1.5 | 50 | 6 | 2.0 |
| MA4P159 | 60 | 0.20 | 1.0 | 65 | 7 | 2.5 |
| MA4P160 | 100 | 0.05 | 1.9 | 80 | 8 | 2.0 |
| MA4P161 | 100 | 0.10 | 1.5 | 90 | 9 | 2.5 |
| MA4P162 | 100 | 0.15 | 1.2 | 100 | 10 | 3.0 |
| MA4P165 | 200 | 0.05 | 2.5 | 170 | 20 | 2.0 |
| MA4P166 | 200 | 0.10 | 2.0 | 190 | 20 | 3.0 |

Notes:

1. Nominal chip size is 15 X 15 mil, case style 134. See Appendix for full dimensions.
2. Maximum reverse current is 10 μA at the specified voltage rating.
3. Maximum capacitance is specified at 1 MHz at the indicated voltage.
4. Maximum series resistance is at the specified current and a frequency of 500 MHz.
5. Nominal carrier lifetime is specified at $I_F = 10\text{ mA}$.
6. Nominal reverse recovery time is specified at $I_F = 20\text{ mA}$, $I_R = 200\text{ mA}$.

Attenuator PIN Diode Chips

Specifications @ $T_A = +25^\circ\text{C}$

| Model ¹ Number | Voltage ² Rating (Volts) | Maximum ⁴ R _s @ 10 mA (Ohms) | Maximum ³ C _j @ 100V @ 100 V (pF) | Nominal Characteristics | | | | |
|------------------------------|---|--|---|---|---|--|-----------------------------|--|
| | | | | R _s for $I_F = 1\text{ mA}$ (Ohms) | R _s for $I_F = 10\text{ }\mu\text{A}$ (Ohms) | Carrier Lifetime (μs) | I-Region Width (mils) | Equivalent ⁴ M/A-COM Axial Lead PIN Diode |
| MA47418 | 200 | 3 | 0.15 | 8 | 500 | 1.0 | 2 | MA47047 |
| MA47416 | 200 | 6 | 0.15 | 30 | 2000 | 2.0 | 4 | MA47600 |
| MA47406 | 200 | 8 | 0.15 | 50 | 3000 | 2.5 | 7 | MA47100 |

Notes:

1. Nominal chip size for the MA47418 and MA47416 is 30 x 30 mil (case style 131), MA47406 is 20 x 20 mil (case style 132). See Appendix for full dimensions
2. Maximum reverse current is 10 μA at specified voltage rating.
3. Capacitance is specified at 1 MHz.
4. Resistance is specified at 100 MHz.
5. Carrier Lifetime is specified at 10 mA.

Specifications Subject to Change Without Notice.

General Purpose PIN Chips

Specifications @ $T_A = +25^\circ\text{C}$

| Model ¹ Number | Voltage ² Rating (Volts) | Maximum R_S @ 10 mA (Ohms) | Maximum ³ C_j @ V_R (pF) | Nominal Characteristics | | | | |
|------------------------------|---|------------------------------------|---|--|--|-------------------------------|---|---|
| | | | | Carrier ⁴ Lifetime (ns) | I-Region Width (μm) | Contact Diameter (mils) | Thermal Resistance ($^\circ\text{C/W}$) | Chip Size ⁵ (mils X mils) |
| MA4P420-132 | 35 | 0.5 | 0.85 @ 20 | 300 | 10 | 6.0 | 60 | 20 X 20 |
| MA4P102-134 | 50 | 2.0 | 0.05 @ 10 | 20 | 7 | 1.5 | 60 | 15 X 15 |
| MA4P202-134 | 100 | 2.5 | 0.05 @ 10 | 60 | 12 | 1.5 | 60 | 15 X 15 |
| MA4P203-134 | 100 | 1.5 | 0.15 @ 10 | 100 | 12 | 2.5 | 30 | 15 X 15 |
| MA4P303-134 | 200 | 1.5 | 0.15 @ 10 | 200 | 20 | 4.0 | 30 | 15 X 15 |
| MA4P404-132 | 250 | 0.6* | 0.20 @ 50 | 1000 | 30 | 4.0 | 20 | 20 X 20 |

*At 50 mA, 100 MHz

Notes:

1. Maximum reverse current is 10 μA at specified voltage rating.
2. Resistance is specified at 500 MHz unless indicated.
3. Capacitance is specified at 1 MHz at the indicated voltage.
4. Nominal carrier lifetime is specified at 10 mA.
5. Case style is indicated by model number suffix. See Appendix for full dimensions.

PIN CERMACHIPS

Specifications @ $T_A = +25^\circ\text{C}$

| Model ¹ Number | Voltage ² Rating (Volts) | Maximum R_S @ 100 mA (Ohms) | Maximum ³ C_j @ 100V (pF) | Nominal Characteristics | | | | |
|------------------------------|---|-------------------------------------|--|---|-----------------------------|---|-------------------------------|---|
| | | | | Carrier ⁴ Lifetime (μs) | I-Region Width (mils) | Chip Size ⁵ (mils X mils) | Contact Diameter (mils) | Thermal Resistance ($^\circ\text{C/W}$) |
| MA4P504-132 | 500 | 0.60 | 0.20 | 1 | 2 | 20 X 20 | 5 | 20 |
| MA4P505-131 | 500 | 0.45 | 0.35 | 2 | 2 | 30 X 30 | 8 | 15 |
| MA4P506-131 | 500 | 0.30 | 0.70 | 3 | 2 | 30 X 30 | 12 | 10 |
| MA4P604-131 | 1000 | 1.00 | 0.30 | 3 | 4 | 30 X 30 | 12 | 15 |
| MA4P606-131 | 1000 | 0.70 | 0.60 | 4 | 4 | 30 X 30 | 18 | 10 |
| MA4P607-210 | 1000 | 0.40 | 1.30 | 5 | 4 | 65 X 65 | 28 | 7 |
| MA4P608-130 | 1000 | 0.35* | 2.50 | 5 | 4 | 80 X 80 | 38 | 5 |
| MA4P709-223 | 1500 | 0.25** | 3.30 | 10 | 7 | 110 X 110 | 50 | 2 |

* At 150 mA

** At 300 mA

Notes:

1. Maximum reverse current is 10 μA at specified voltage ratings.
2. Capacitance is specified at 1 MHz.
3. Resistance is specified at 100 MHz.
4. Nominal Carrier Lifetime is specified at 10 mA.
5. Case style is indicated by model number suffix. See Appendix for full dimensions.

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

3-29

North America: Tel. (800) 366-2266
Fax (800) 618-8883

■ Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

■ Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

Maximum Ratings

| Parameters | Absolute Maximum |
|-----------------------|------------------|
| Storage Temperature | -65°C to +200°C |
| Operating Temperature | -65°C to +175° |
| Voltage | Voltage Rating |

Power Dissipation





Low Capacitance and
Attenuator Chips

0.5 Watts @ 25°C (derate to
zero watts at 175°C)

General Purpose Chips and CERMACHIPS



$$P_{\text{diss}} = \frac{175^{\circ}\text{C} - T_{\text{ambient}}}{\text{Thermal Resistance}}$$

Typical Series Resistance vs Current Performance Curves

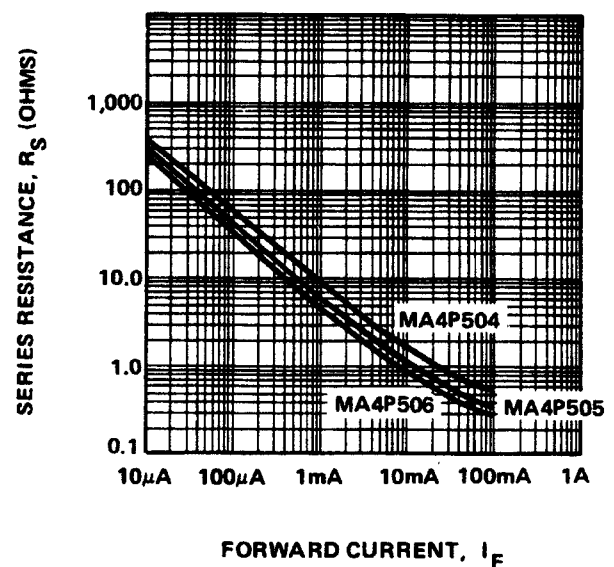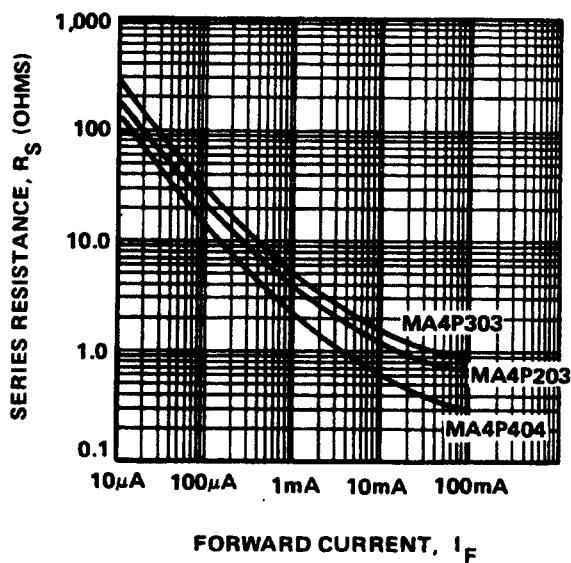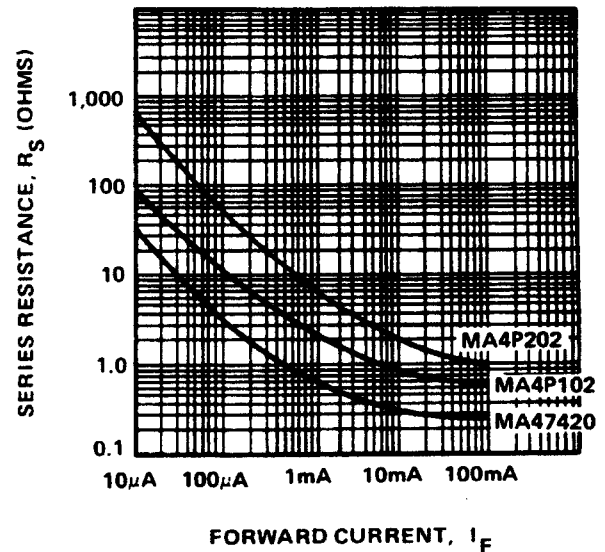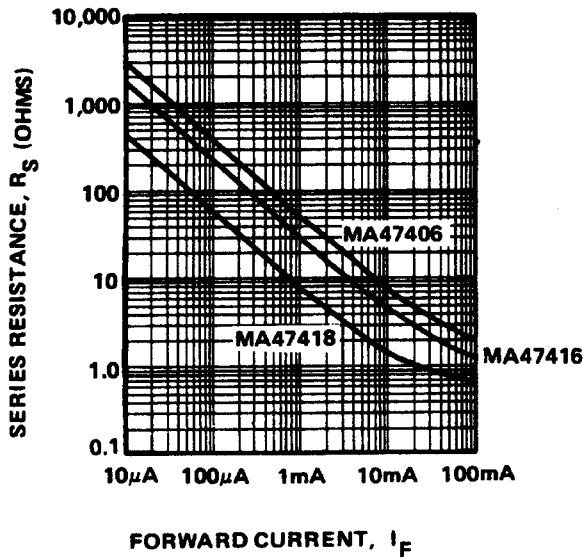

Specifications Subject to Change Without Notice.

Typical Series Resistance vs Current Performance Curves

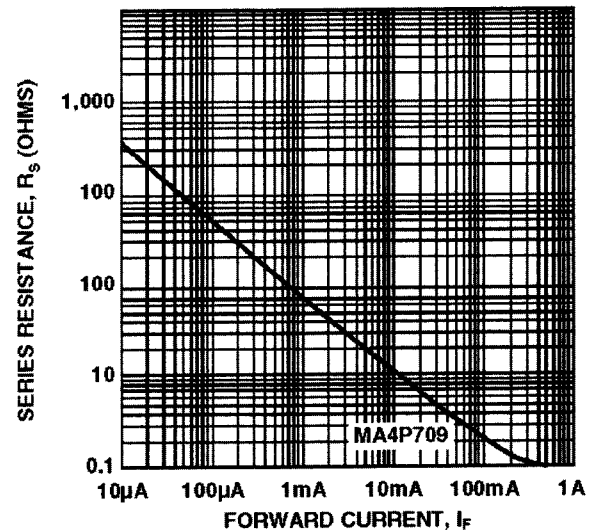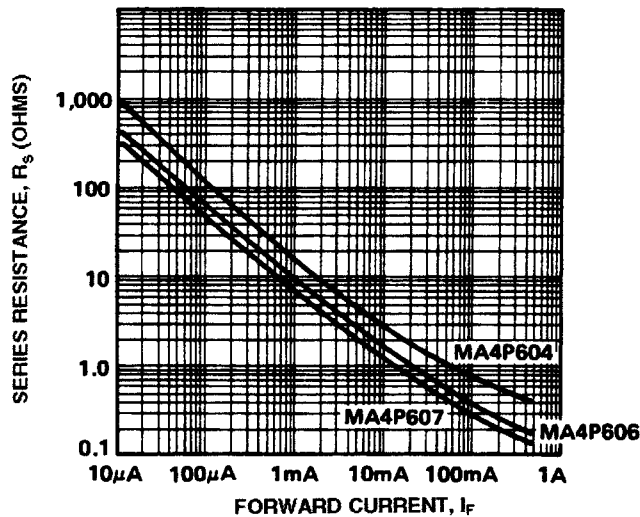

Bonding and Handling Considerations for Silicon PIN Diode Chips

The normal handling precautions used on semiconductors in hybrid microelectronic circuits are appropriate to silicon PIN diode chips. PIN diode chips are packaged in waffle packs that should be stored in a dry, clean environment. It is recommended that the chips be removed and subsequently handled using a vacuum pencil.

Die Bonding

Hot gas bonding is recommended for the passivated chips and the smaller CERMACHIP (less than 60 X 60 mils) PIN diodes. The preferred mating substrate surface is plated with gold or tin over a nickel flash. A gold tin preform (80%/20%, 280°C melting temperature) should be used. The substrate is heated to 250°C and the hot gas (forming gas) is injected at 350°C. The collet pressure should be about 70 grams during bonding.

For the larger CERMACHIP PIN diodes, it is recommended that softer solder preform such as lead-tin-silver (90%/5%/5%, 308°C melting temperature) be used. Bonding should take place in a belt furnace using a hydrogen cover gas.

It is also possible to solder these chips directly on a heat transfer platform using a solder preform or solder cream.

If flux is required, it should be used sparingly and its residue removed immediately after bonding. Flux should not be used with CERMACHIP diodes since it will damage the passivation surface. The platform temperature should be raised to 30°C above the solder liquid state temperature.

Bonding with conductive epoxy is also acceptable. The manufacturers recommendations for mixing, applying and curing must be followed. The curing should take place in a circulating air chamber dedicated to inorganic epoxies.

Lead Bonding

Thermocompression and thermocompression ultrasonic lead bonding techniques may be employed for PIN diode chips. Wire bonds using 0.7 mil and 1 mil gold wire may be ball or wedge bonded; ribbons from 0.25 mil X 3.0 mil to 1 mil X 10 mil maybe wedge bonded. The choice depends on the application and the contact size. During lead bonding, it is preferable that the substrate be raised to approximately 150°C. The bonding tip temperature and pressure depends on the wire or ribbon size and contact area. The resulting bond strength should exceed the specification in MIL-STD883, Method 2011.3 for gold wire or ribbon leads.

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

■ Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

■ Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020