

Ultra High Ratio Si Hyperabrupt Varactor Diode

V 4.00

MA4ST2000 Series

Features

- Ultra High Capacitance Ratio, $C(0.1V)/C(4.7V) = 18:1$, $C(0.1V)/C(2.7V) = 12:1$
- Surface Mount Plastic Packages : SC-79, SOD-323, SC-70, 3 Lead
- SPC Process for Superior C vs V and Q vs V Repeatability

Description

M/A-COM's MA4ST2000 series is a highly repeatable, UHCVD/ion-implanted, hyperabrupt silicon tuning varactor in a cost effective surface mount package. This series of varactors is designed for high capacitance ratio for low battery voltage operation. It is efficient for wide band tuning and low phase noise application where the supply voltage is limited to 5 volts or less. Varactors in this series have a typical 18:1 capacitance ratio between 0.1 V and 4.7 V and a 12:1 ratio between 0.1 V and 2.7 V. The Varactors are offered as Singles in both SC-79 and SOD-323 configurations with Common Cathode version offered in a SC-70, 3 Lead.

Ordering Information

Part Number	Configuration	Package
MA4ST2XXX-1279T	Single	SC-79
MA4ST2XXX-1141T	Single	SOD-323
MA4ST2XXX-1146T	Common Cathode	SC-70 3 Lead

Absolute Maximum Ratings

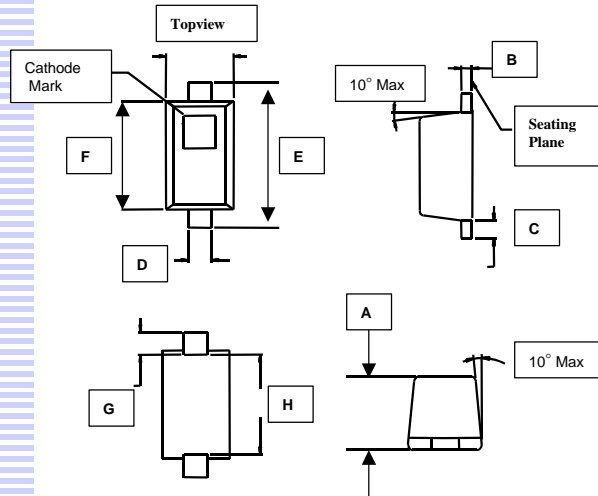
@T_A = +25 °C

Parameter	Absolute Maximum
Reverse Voltage	12 V
Forward Current	50 mA
Operating Temperature	-55 °C to +125 °C
Storage Temperature	-55 °C to +125 °C

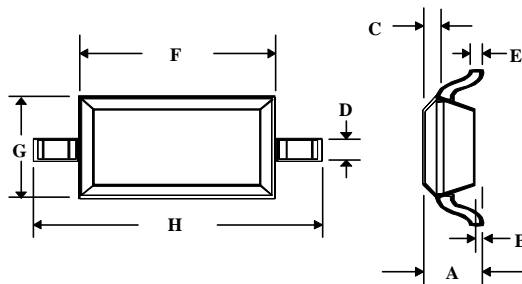
Technical Parasitic Information

Package Type	Package Cp	Package Ls
SC-79	0.10	0.6
SOD-323	0.11	1.2
SC-70, 3 Lead	0.12	1.3

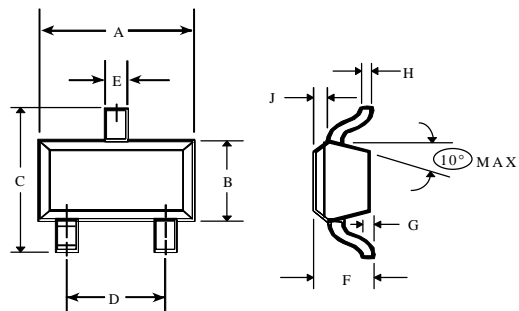
Case Styles

SC-79 (SOD-523)
Case Style 1279

DIM.	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A	0.020	0.028	0.50	0.71
B	0.003	0.008	0.08	0.20
C	0.006	0.010	0.15	0.25
D	0.010	0.014	0.25	0.36
E	0.059	0.067	0.08	0.15
F	0.043	0.051	1.50	1.30
G	0.011	0.012	0.28	0.30
H	0.037	0.043	0.94	1.09

SOD-323
Case Style 1141

DIM.	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A	—	0.043	—	1.1
B	—	0.004	—	0.1
C	—	0.008	—	0.2
D	0.010	0.016	0.25	0.4
E	0.003	0.006	0.08	0.15
F	0.063	0.075	1.6	1.9
G	0.045	0.057	1.15	1.45
H	0.091	0.106	2.3	2.7

SC-70, 3 Lead
Case Style 1146

DIM.	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A	0.071	0.087	1.80	2.20
B	0.045	0.053	1.15	1.35
C	0.071	0.094	1.80	2.40
D	0.047	0.057	1.19	1.45
E	0.010	0.016	0.25	0.41
F	0.031	0.039	0.80	1.00
G	—	0.004	—	0.10
H	0.004	0.007	0.10	0.18
J	0.004	0.010	0.10	0.25

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

Visit www.macom.com for additional data sheets and product information.

■ North America: Tel. (800) 366-2266

■ Asia/Pacific: Tel. +81-44-844-8296, Fax +81-44-844-8298

■ Europe: Tel. +44 (1344) 869 595, Fax +44 (1344) 300 020

tyco / Electronics

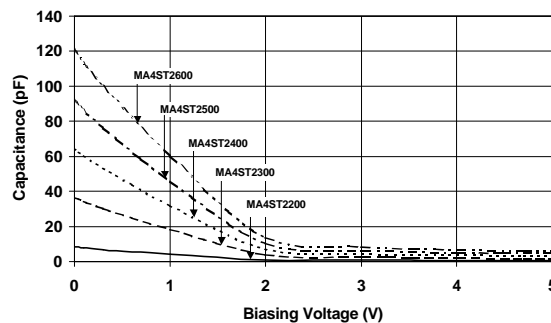
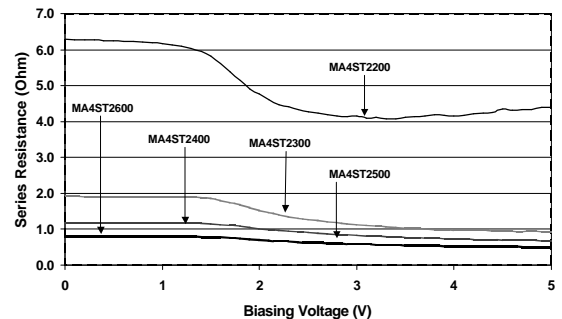
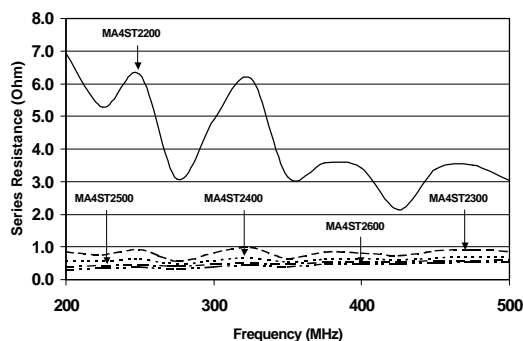
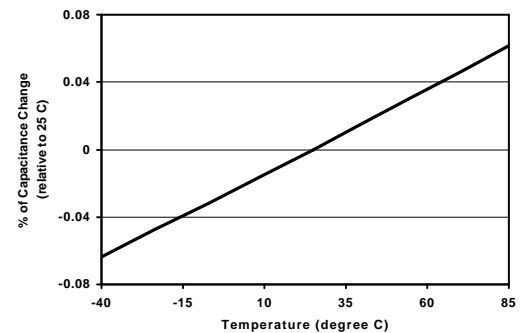
M/A-COM

Electrical Characteristics @ $T_A = +25^\circ\text{C}$ **Breakdown Voltage @ $I_R = 10\text{mA}$, $V_b = 12\text{ V}$ Minimum****Reverse Leakage Current @ $V_R = 10\text{V}$, $I_R = 10\text{ nA}$ Maximum**

Part Number	Ct* (pF)						Capacitance Ratio		Rs** (Ohm)	
	$V_R = 0.1\text{ V}$	$V_R = 1.0\text{ V}$				$V_R = 2.7\text{ V}$	$V_R = 4.7\text{ V}$	$C_{t0.1}/C_{t4.7}$	$C_{t0.1}/C_{t2.7}$	$V_R = 4.0\text{ V}$
	Typ.	Min.	Nom.	Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Max.
MA4ST2200	7.68	3.66	4.07	4.48	0.70	0.47	16.3	11.0	3.84	4.6
MA4ST2300	34.2	16.2	18.0	19.8	2.67	1.85	18.5	12.8	0.95	1.2
MA4ST2400	60.3	28.6	31.8	34.9	4.98	3.27	18.4	12.1	0.67	0.9
MA4ST2500	86.4	41.4	46.0	50.6	6.68	4.64	18.6	12.9	0.61	0.8
MA4ST2600	113.3	54.3	60.3	66.4	9.14	6.27	18.1	12.4	0.54	0.7

* Capacitance @ 1 MHz

** Series Resistance @ 470 MHz

Typical Capacitance vs. Biasing Voltage**Typical Series Resistance vs. Biasing Voltage****Typical Series Resistance vs. Frequency****Typical Capacitance Change vs. Temperature**

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

Visit www.macom.com for additional data sheets and product information.

■ North America: Tel. (800) 366-2266
 ■ Asia/Pacific: Tel. +81-44-844-8296, Fax +81-44-844-8298
 ■ Europe: Tel. +44 (1344) 869 595, Fax +44 (1344) 300 020

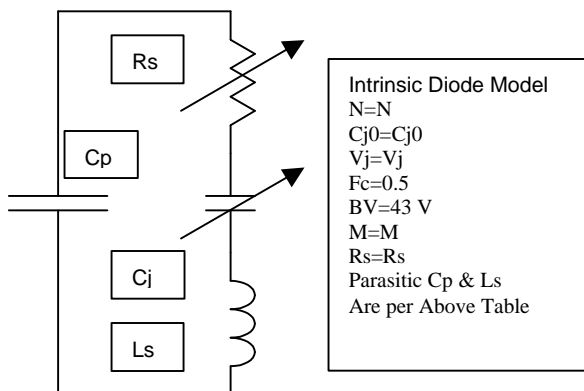
tyco / Electronics

M/A-COM

Typical Capacitance Values

V_R (V)	MA4ST2200	MA4ST2300	MA4ST2400	MA4ST2500	MA4ST2600
	Ct (pF)	Ct (pF)	Ct (pF)	Ct (pF)	Ct (pF)
0.1	7.643	34.06	60.26	86.48	113.09
0.3	6.746	30.07	53.12	76.34	99.80
0.5	5.948	26.56	46.81	67.36	88.07
1.0	4.006	18.00	31.75	46.09	60.31
1.5	1.895	8.313	15.52	22.83	30.21
2.0	0.985	3.941	7.470	10.05	13.94
2.5	0.744	2.889	5.407	7.112	9.952
3.0	0.638	2.429	4.512	5.918	8.274
3.5	0.579	2.166	4.000	5.275	7.332
4.0	0.543	1.993	3.663	4.895	6.749
4.5	0.517	1.845	3.370	4.691	6.317
5.0	0.469	1.771	3.200	4.557	6.086

Spice Model



Part Number	N	CJO (pF)	Vj (V)	M	Rs (W)
MA4ST2200	1.261	10.2	12.62	18.60	1.114
MA4ST2300	1.210	46.8	2.450	4.268	1.085
MA4ST2400	1.158	84.6	1.322	2.632	0.903
MA4ST2500	1.204	100	1.616	2.700	0.842
MA4ST2600	1.196	159	1.169	2.270	0.910

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

Visit www.macom.com for additional data sheets and product information.

■ North America: Tel. (800) 366-2266
 ■ Asia/Pacific: Tel. +81-44-844-8296, Fax +81-44-844-8298
 ■ Europe: Tel. +44 (1344) 869 595, Fax +44 (1344) 300 020