

# E-Series 2-Way 0° Power Divider

## 5 - 500 MHz

**ESML-2-1**

V3.00

### Features

- 2 Way
- 0°
- Surface Mount

### Specifications @ 25°C

Frequency Range		5 - 500 MHz
Insertion Loss	Typical	Maximum
	5 - 500 MHz	0.25 dB
	50 - 250 MHz	0.3 dB
	250 - 500 MHz	0.5 dB
Isolation	Typical	Minimum
	5 - 500 MHz	50 dB
	50 - 250 MHz	33 dB
	250 - 500 MHz	30 dB
Amplitude Unbalance	Maximum	
	5 - 500 MHz	0.15 dB
	50 - 250 MHz	0.3 dB
	250 - 500 MHz	0.6 dB
Phase Unbalance	Maximum	
	5 - 500 MHz	1°
	50 - 250 MHz	2°
	250 - 500 MHz	5°

### Operating Characteristics

Impedance	50 Ohms Nominal
-----------	-----------------


### Ordering Information

<b>Part No.</b>	<b>Packaging</b>
ESML-2-1	Tube
ESML-2-1TR	Forward Tape & Reel

### Absolute Maximum Ratings

Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Storage Temperature	260°C
Pin Temperature (10 seconds)	-55°C to 100°C

### SM-24

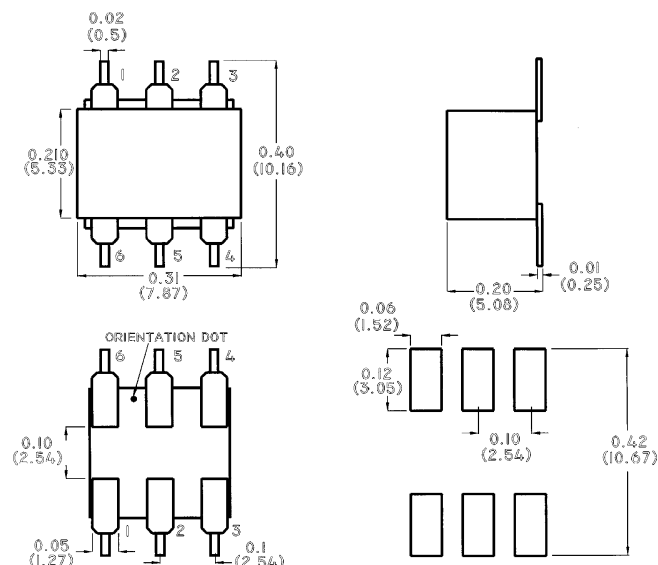

Dimensions in ( ) are in mm.  
Unless Otherwise Noted: .x = ±0.04 (1.00)  
.xx = ±0.02 (0.50)  
.xxx = ±0.010 (0.250)

### Pin Configuration

Function	Pin No.
Not Connected	2,5
Ground	1
Input	6
Port 1	4
Port 2	3

S 0554 C