


Features

- Includes RC bias circuit
- In-Phase Combined Pulsed Power Transistors
- Input and Output Matched to 50 Ω
- Soft Substrate $\epsilon_R=10.5$ Circuit Board
- Nickel Plated Copper Flange
- MTTF > 1×10^6 Hrs @ Tflange=45 $^{\circ}$ C

Outline Drawing

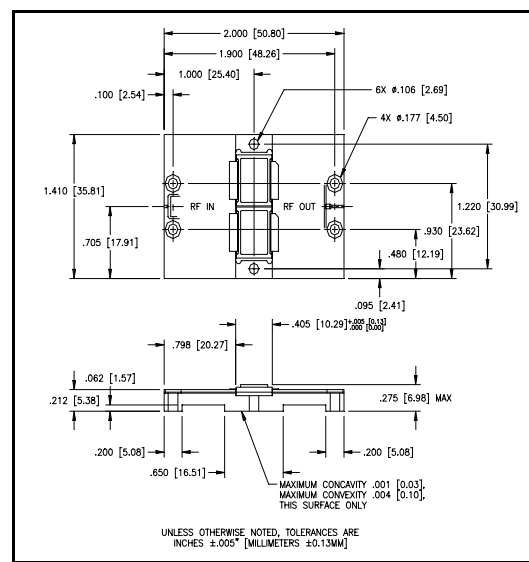

Electrical Characteristics @ 25 \pm 5 $^{\circ}$ C (Room Ambient)

Parameter	Symbol	Min.	Max.	Units	Test Conditions
Input Power	P _{in}	-	53.3	Wpk	V _{CC} =38 V, P _{out} = 300 Wpk, F=2.7, 2.8, 2.9 GHz
Output Power with .5 dB overdrive	P _{out}	315		Wpk	V _{CC} =38 V, P _{IN} =(P _{IN} @ P _{OUT} =300 W) + 0.5 dB, F=2.7, 2.8, 2.9 GHz
Power Gain	G _p	7.5	-	dB	V _{CC} =38 V, P _{OUT} =300 Wpk, F=2.7, 2.8, 2.9 GHz
Collector Efficiency	η_c	36	-	%	V _{CC} =38 V, P _{OUT} =300 Wpk, F=2.7, 2.8, 2.9 GHz
Input Return Loss	RL	10	-	dB	V _{CC} =38 V, P _{OUT} =300 Wpk, F=2.7, 2.8, 2.9 GHz
Pulse Amplitude Droop	Droop	-	.5	dB	V _{CC} =38 V, P _{OUT} =300 Wpk, F=2.7, 2.8, 2.9 GHz
2nd Harmonic	2fc	-	-20	dBc	V _{CC} =38 V, P _{OUT} =300 Wpk, F=2.7, 2.8, 2.9 GHz
Spurious Level	Spurious	-	-60	dBc	V _{CC} =38 V, P _{OUT} =300 Wpk, F=2.7, 2.8, 2.9 GHz
Insertion Phase Deviation	$\Delta\phi$	-14	+14	Degrees	V _{CC} =38 V, P _{OUT} =300 Wpk, F=2.7, 2.8, 2.9 GHz
Rise time	T _r	-	200	nS	V _{CC} =38 V, P _{OUT} =300 Wpk, F=2.7, 2.8, 2.9 GHz
Load Mismatch Stability	VSWR-S	-	1.5:1	-	V _{CC} =38 V, P _{OUT} =300 Wpk, F=2.7, 2.8, 2.9 GHz
Load Mismatch Tolerance	VSWR-T	-	2:1	dB	V _{CC} =38 V, P _{OUT} =300 Wpk, F=2.7, 2.8, 2.9 GHz
Gain Flatness over Frequency	G _p Flat	-	.8	dB	V _{CC} =38 V, P _{OUT} =300 Wpk, F=2.7, 2.8, 2.9 GHz

PHA2729-300M Sample Test Data

Rev. 0

Test Conditions: $V_{cc} = 38V_{dc}$, Pulse Width: 100µS, Duty Cycle: 10%,
Pout: 300 Wpk, Tflange: 50 °C

Freq. (GHz)	PIN (Wpk)	Ic (A)	R. Loss (dB)	P. Drp. (dB)	Gp (dB)	Nc (%)	Po 1 DB OD (Wpk)	Comp. (dB)	Gp Flat (dB)	1.5:1 VSWR (S,D,L,B)	2.0:1 VSWR (P,F)
2.7	36.4	16.43	16.9	0.0	9.16	48.1	351	0.68	0.73	S	P
2.8	39.4	16.95	18.2	0.0	8.82	46.6	359	0.78		S	P
2.9	43.1	17.33	14.5	0.0	8.43	45.6	337	0.51		S	P

Absolute Maximum Ratings

Parameter	Symbol	Rating	Units
Junction Temperature	T _J	200	°C
Thermal Resistance @ 25 °C	θ _{JC}	0.25	°C/W
Power Dissipation Total @ 25 °C	P _D	750	W
Operating Case Temperature**	T _C	-40 to +100	°C
Storage Temperature	T _{STG}	-40 to +125	°C

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s)
or information contained herein without notice.

Visit www.macom.com for additional data sheets and product information.

■ **North America:** Tel. (800) 366-2266

■ **Asia/Pacific:** Tel.+81-44-844-8296, Fax +81-44-844-8298

■ **Europe:** Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020