



4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

General Description

The MAX6957 compact, serial-interfaced LED display driver general-purpose I/O (GPIO) peripheral provides microprocessors with up to 28 ports. Each port is individually user configurable to either a logic input, logic output, or common-anode (CA) LED constant-current segment driver. Each port configured as an LED segment driver behaves as a digitally controlled constant-current sink, with 16 equal current steps from 1.5mA to 24mA. The LED drivers are suitable for both discrete LEDs and CA numeric and alphanumeric LED digits.

Each port configured as a GPIO can be either a push-pull logic output capable of sinking 10mA and sourcing 4.5mA, or a Schmitt logic input with optional internal pullup. Seven ports feature configurable transition detection logic, which generates an interrupt upon change of port logic level. The MAX6957 is controlled through an SPI™-compatible 4-wire serial interface.

The MAX6957AAX and MAX6957AGL have 28 ports and are available in 36-pin SSOP and 40-pin QFN packages, respectively. The MAX6957AAI and MAX6957ANI have 20 ports and are available in 28-pin SSOP and 28-pin DIP packages, respectively.

Applications

Set-Top Boxes
Panel Meters
White Goods
Automotive
Bar Graph Displays
Industrial Controllers
System Monitoring

Typical Operating Circuit appears at end of data sheet.

SPI and QSPI are trademarks of Motorola, Inc.

MICROWIRE is a trademark of National Semiconductor Corp.

Features


- ◆ High-Speed 26MHz SPI-/QSPI™-/MICROWIRE™-Compatible Serial Interface
- ◆ 2.5V to 5.5V Operation
- ◆ -40°C to +125°C Temperature Range
- ◆ 20 or 28 I/O Ports, Each Configurable as
 - Constant-Current LED Driver
 - Push-Pull Logic Output
 - Schmitt Logic Input
 - Schmitt Logic Input with Internal Pullup
- ◆ 11µA (max) Shutdown Current
- ◆ 16-Step Individually Programmable Current Control for Each LED
- ◆ Logic Transition Detection for Seven I/O Ports

Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE |
|-------------|-----------------|-------------|
| MAX6957ANI | -40°C to +125°C | 28 DIP |
| MAX6957AAI | -40°C to +125°C | 28 SSOP |
| MAX6957AAX | -40°C to +125°C | 36 SSOP |
| MAX6957AGL* | -40°C to +125°C | 40 QFN |

*Future product—contact factory for availability.

Pin Configurations

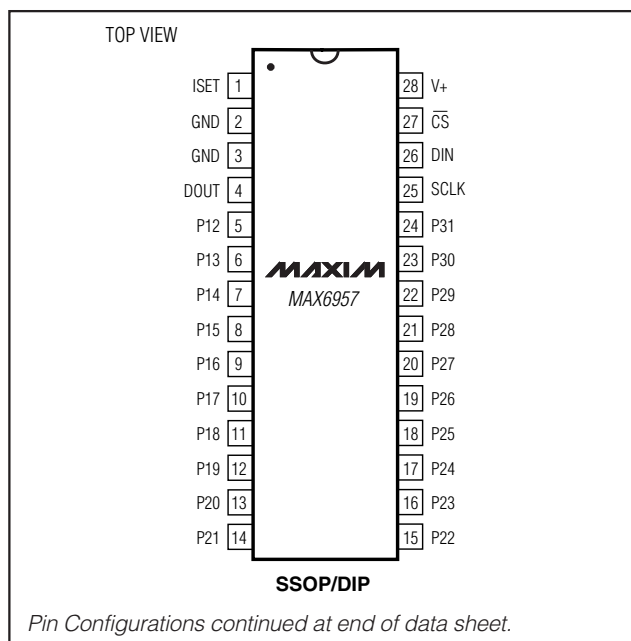

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

MAX6957

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

ABSOLUTE MAXIMUM RATINGS

Voltage (with Respect to GND)

V+-0.3V to +6V

All Other pins-0.3V to (V+ + 0.3V)

P4–P31 Current±30mA

GND Current800mA

Continuous Power Dissipation (T_A = +70°C)

28-Pin PDIP (derate 20.8mW/°C above +70°C)1667mW

28-Pin SSOP (derate 9.5mW/°C above +70°C)762mW

36-Pin SSOP (derate 11.8mW/°C above +70°C)941mW

Operating Temperature Range (T_{MIN}, T_{MAX})-40°C to +125°C

Junction Temperature+150°C

Storage Temperature Range-65°C to +150°C

Lead Temperature (soldering, 10s)+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(Typical Operating Circuit, V+ = 2.5V to 5.5V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|--------------------------------------|--------|---|---|----------|-----|----------|-------|
| Operating Supply Voltage | V+ | | | 2.5 | | 5.5 | V |
| Shutdown Supply Current | ISHDN | All digital inputs at V+ or GND | T _A = +25°C | 5.5 | | 8 | μA |
| | | | T _A = -40°C to +85°C | 10 | | | |
| | | | T _A = T _{MIN} to T _{MAX} | 11 | | | |
| Operating Supply Current | IGPOH | All ports programmed as outputs high, no load, all other inputs at V+ or GND | T _A = +25°C | 180 | 230 | μA | |
| | | | T _A = -40°C to +85°C | 250 | | | |
| | | | T _A = T _{MIN} to T _{MAX} | 270 | | | |
| Operating Supply Current | IGPOL | All ports programmed as outputs low, no load, all other inputs at V+ or GND | T _A = +25°C | 170 | 210 | μA | |
| | | | T _A = -40°C to +85°C | 230 | | | |
| | | | T _A = T _{MIN} to T _{MAX} | 240 | | | |
| Operating Supply Current | ILED | All ports programmed as LED outputs, all LEDs off, no load, all other inputs at V+ or GND | T _A = +25°C | 110 | 135 | μA | |
| | | | T _A = -40°C to +85°C | 140 | | | |
| | | | T _A = T _{MIN} to T _{MAX} | 145 | | | |
| INPUTS AND OUTPUTS | | | | | | | |
| Logic-High Input Voltage Port Inputs | VIH | | | 0.7 × V+ | | | V |
| Logic-Low Input Voltage Port Inputs | VIL | | | | | 0.3 × V+ | V |
| GPIO Input Internal Pullup to V+ | IPU | V+ = 2.5V | | 12 | 19 | 30 | μA |
| | | V+ = 5.5V | | 80 | 120 | 180 | |
| Hysteresis Voltage GPIO Inputs | ΔVI | | | 0.3 | | | V |
| Output High Voltage | VOH | GPIO outputs, ISOURCE = 2mA, TA = -40°C to +85°C | | V+ - 0.7 | | | V |
| | | GPIO outputs, ISOURCE = 1mA, TA = TMIN to TMAX (Note 2) | | V+ - 0.7 | | | V |

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

MAX6957

ELECTRICAL CHARACTERISTICS (continued)

(Typical Operating Circuit, $V_+ = 2.5V$ to $5.5V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|---------------------|---|-------------|------|------|-------|
| Port Sink Current | I_{OL} | $V_{PORT} = 0.6V$ | 2 | 10 | 18 | mA |
| Output Short-Circuit Current | I_{OLSC} | Port configured output low, shorted to V_+ | 2.75 | 11 | 20 | mA |
| Port Drive LED Sink Current, Port Configured as LED Driver | I_{DIGIT} | $V_+ = 2.5V$, $V_{LED} = 2.3V$ at maximum LED current | 9.5 | 13.5 | 18 | mA |
| | | $V_+ = 3.3V$, $V_{LED} = 2.4V$ at maximum LED current (Note 2) | 18.5 | 24 | 27.5 | |
| | | $V_+ = 5.5V$, $V_{LED} = 2.4V$ at maximum LED current | 19 | 25 | 30 | |
| Port Drive Logic Sink Current, Port Configured as LED Driver | I_{DIGIT_SC} | $V_+ = 2.5V$, $V_{OUT} = 0.6V$ at maximum LED current | 18.5 | 23 | 28.0 | mA |
| | | $V_+ = 5.5V$, $V_{OUT} = 0.6V$ at maximum LED current | 19 | 24 | 28 | |
| Input High-Voltage SCLK, DIN, \overline{CS} | V_{IH} | $V_+ \leq 3.3V$ | 1.6 | | | V |
| | | $V_+ > 3.3V$ | 2 | | | |
| Input Low-Voltage SCLK, DIN, \overline{CS} | V_{IL} | | | | 0.6 | V |
| Input Leakage Current SCLK, DIN, \overline{CS} | I_{IH} , I_{IL} | | -50 | | +50 | nA |
| Output High-Voltage DOUT | V_{OH} | $I_{SOURCE} = 1.6mA$ | $V_+ - 0.5$ | | | V |
| Output Low-Voltage DOUT | V_{OL} | $I_{SINK} = 1.6mA$ | | | 0.4 | V |

TIMING CHARACTERISTICS (Figure 3)

($V_+ = 2.5V$ to $5.5V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|-----------|-------------------|------|-----|-----|-------|
| CLK Clock Period | t_{CP} | | 38.4 | | | ns |
| CLK Pulse Width High | t_{CH} | | 19 | | | ns |
| CLK Pulse Width Low | t_{CL} | | 19 | | | ns |
| \overline{CS} Fall to SCLK Rise Setup Time | t_{CSS} | | 9.5 | | | ns |
| CLK Rise to \overline{CS} Rise Hold Time | t_{CSH} | | 0 | | | ns |
| DIN Setup Time | t_{DS} | | 9.5 | | | ns |
| DIN Hold Time | t_{DH} | | 0 | | | ns |
| Output Data Propagation Delay | t_{DO} | $C_{LOAD} = 25pF$ | | | 21 | ns |
| Minimum \overline{CS} Pulse High | t_{CSW} | | 19 | | | ns |










Note 1: All parameters tested at $T_A = +25^\circ C$. Specifications over temperature are guaranteed by design.

Note 2: Guaranteed by design.

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

Typical Operating Characteristics

($R_{ISSET} = 39k\Omega$, $T_A = +25^\circ\text{C}$, unless otherwise noted.)

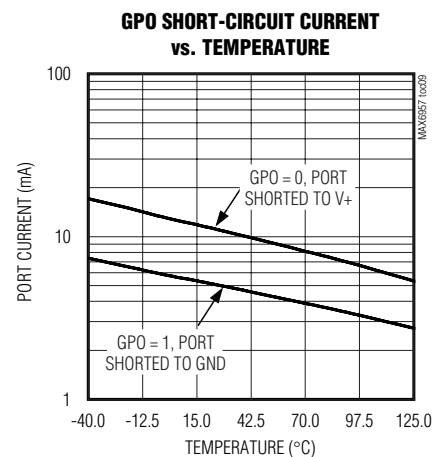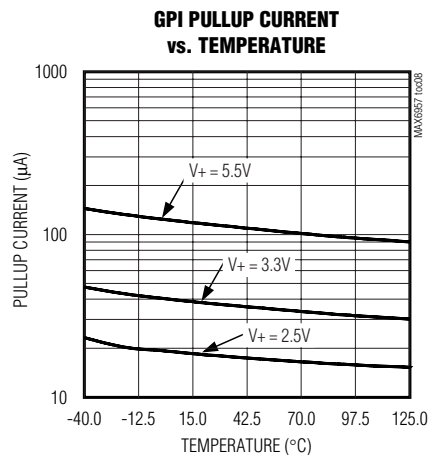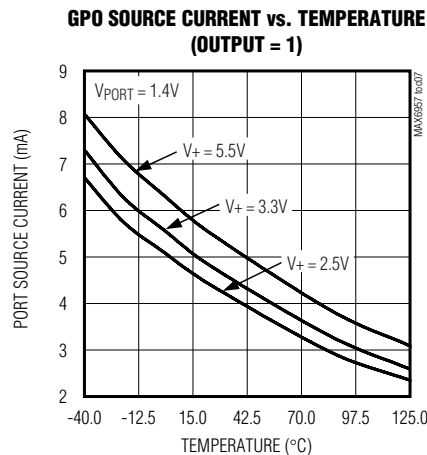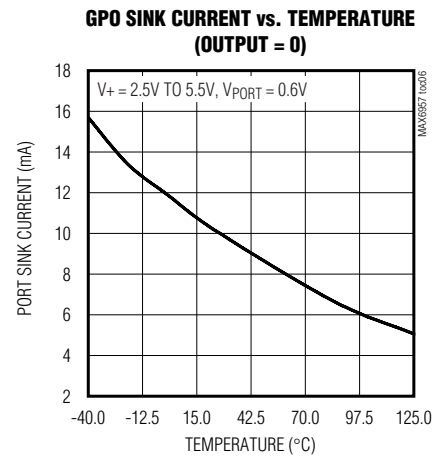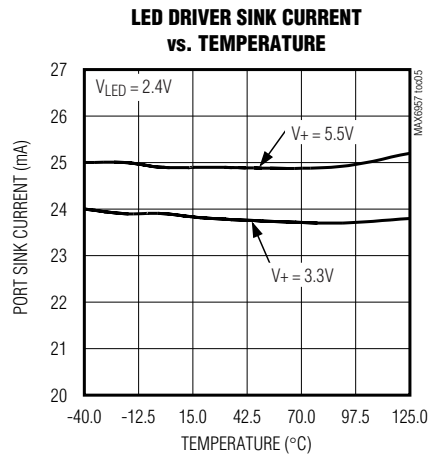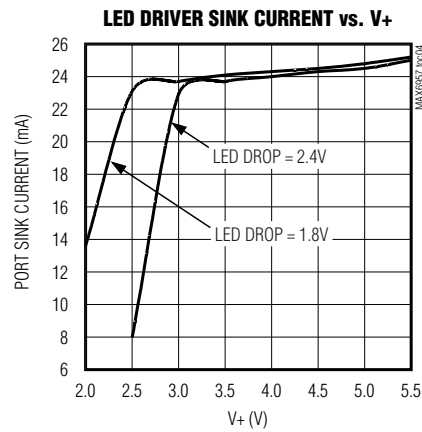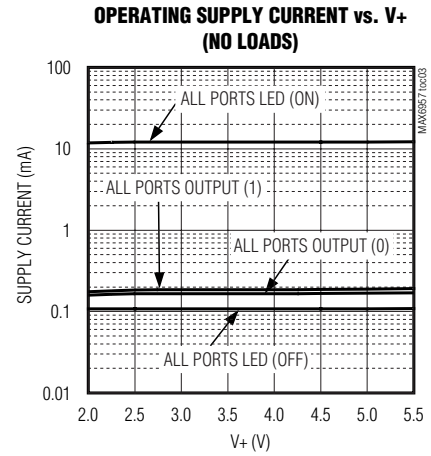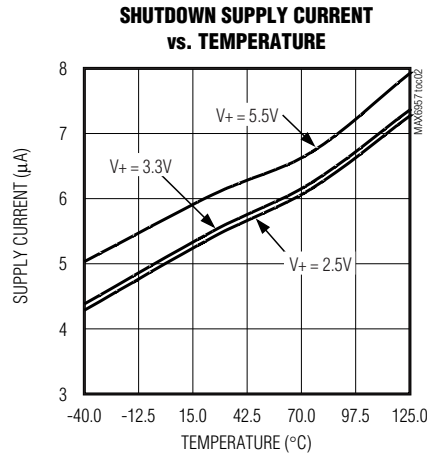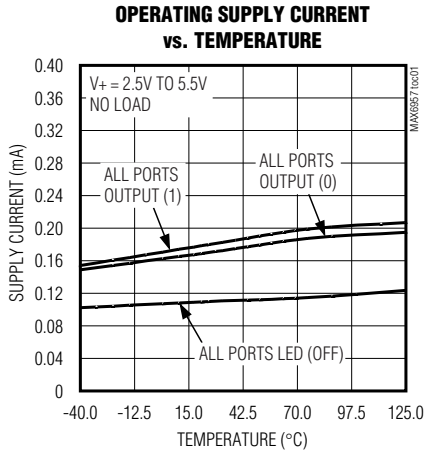

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

Pin Description

MAX6957

| PIN | | NAME | FUNCTION |
|-------------|------|-----------------|--|
| SSOP DIP | SSOP | | |
| 1 | 1 | ISET | Segment Current Setting. Connect ISET to GND through a resistor (R_{ISET}) to set the maximum segment current. |
| 2, 3 | 2, 3 | GND | Ground |
| 4 | 4 | DOUT | 4-Wire Serial Data Output Port |
| 5–24 | — | P12–P31 | LED Segment Drivers and GPIO. P12 to P31 can be configured as CA LED drivers, GPIO outputs, CMOS logic inputs, or CMOS logic inputs with weak pullup resistor. |
| — | 5–32 | P4–P31 | LED Segment Drivers and GPIO. P4 to P31 can be configured as CA LED drivers, GPIO outputs, CMOS logic inputs, or CMOS logic inputs with weak pullup resistor. |
| 25 | 33 | SCLK | 4-Wire Serial Clock Input Port |
| 26 | 34 | DIN | 4-Wire Serial Data Input Port |
| 27 | 35 | \overline{CS} | 4-Wire Chip-Select Input, Active Low |
| 28 | 36 | V+ | Positive Supply Voltage. Bypass V+ to GND with a minimum 0.047 μ F capacitor. |

Detailed Description

The MAX6957 LED driver/GPIO peripheral provides up to 28 I/O ports, P4 to P31, controlled through an SPI-compatible serial interface. The ports can be configured to any combination of constant-current LED drivers, logic inputs and logic outputs, and default to logic inputs on power-up. When fully configured as an LED driver, the MAX6957 controls up to 28 LED segments with individual 16-step adjustment of the constant current through each LED segment. A single resistor sets the maximum segment current for all segments, with a maximum of 24mA per segment. The MAX6957 drives any combination of discrete LEDs and CA digits, including seven-segment and starburst alphanumeric types.

Figure 1 is the MAX6957 functional diagram. Any I/O port can be configured as a push-pull output (sinking 10mA, sourcing 4.5mA), or a Schmitt-trigger logic input. Each input has an individually selectable internal pullup resistor. Additionally, transition detection allows seven ports (P24 through P30) to be monitored in any maskable combination for changes in their logic status. A detected transition is flagged through a status register bit, as well as an interrupt pin (port P31), if desired.

The *Typical Operating Circuit* shows two MAX6957s working together controlling three monochrome 16-segment-plus-DP displays, with five ports left available for GPIO (P27–P31 of U2).

The port configuration registers set the 28 ports, P4 to P31, individually as either LED drivers or GPIO. A pair of bits in registers 0x09 through 0x0F sets each port's configuration (Tables 1 and 2).

The 36-pin MAX6957AAX has 28 ports, P4 to P31. The 28-pin MAX6957ANI and MAX6957AAI only use 20 outputs, P12 to P31. The eight unused ports should be configured as outputs on power-up by writing 0x55 to registers 0x09 and 0x0A. If this is not done, the eight unused ports remain as floating inputs and quiescent supply current rises, although there is no damage to the part.

Register Control of I/O Ports and LEDs Across Multiple Drivers

The MAX6957 offers 20 or 28 I/O ports, depending on package choice. These can be applied to a variety of combinations of different display types, for example: seven, 7-segment digits (Figure 2). This example requires two MAX6957s, with one digit being driven by both devices, half by one MAX6957, half by the other (digit 4 in this example). The two drivers are static, and therefore do not need to be synchronized. The MAX6957 sees CA digits as multiple discrete LEDs. To simplify access to displays that overlap two MAX6957s, the MAX6957 provides four virtual ports P0 through P3. To update an overlapping digit, send the same code twice as an eight-port write, once to P28 through P35 of the first driver, and again to P0 through P7 of the sec-

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

Table 1. Port Configuration Map

| REGISTER | ADDRESS CODE (HEX) | REGISTER DATA | | | | | | | |
|---|--------------------|---------------|----|-----|----|-----|----|-----|----|
| | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Port Configuration for P7, P6, P5, P4 | 0x09 | P7 | | P6 | | P5 | | P4 | |
| Port Configuration for P11, P10, P9, P8 | 0x0A | P11 | | P10 | | P9 | | P8 | |
| Port Configuration for P15, P14, P13, P12 | 0x0B | P15 | | P14 | | P13 | | P12 | |
| Port Configuration for P19, P18, P17, P16 | 0x0C | P19 | | P18 | | P17 | | P16 | |
| Port Configuration for P23, P22, P21, P20 | 0x0D | P23 | | P22 | | P21 | | P20 | |
| Port Configuration for P27, P26, P25, P24 | 0x0E | P27 | | P26 | | P25 | | P24 | |
| Port Configuration for P31, P30, P29, P28 | 0x0F | P31 | | P30 | | P29 | | P28 | |

Table 2. Port Configuration Matrix

| MODE | FUNCTION | PORT REGISTER | PIN BEHAVIOR | ADDRESS CODE (HEX) | PORT CONFIGURATION BIT PAIR | |
|--------|---------------------------|---------------|--|--------------------|-----------------------------|-------|
| | | | | | UPPER | LOWER |
| Output | LED Segment Driver | Written Low | High impedance | 0x09 to 0x0F | 0 | 0 |
| | | Written High | Open-drain current sink, with sink current (up to 24mA) determined by the appropriate current register | | | |
| Output | GPIO Output | Written Low | Active-low logic output | 0x09 to 0x0F | 0 | 1 |
| | | Written High | Active-high logic output | | | |
| Input | GPIO Input Without Pullup | Reading Port | Schmitt logic input | 0x09 to 0x0F | 1 | 0 |
| Input | GPIO Input with Pullup | Reading Port | Schmitt logic input with pullup | 0x09 to 0x0F | 1 | 1 |

Note: The logic is inverted between the two output modes; a high makes the output go low in LED segment driver mode (0x00) to turn that segment on; in GPIO output mode (0x01), a high makes the output go high.

and driver. The first driver ignores the last 4 bits and the second driver ignores the first 4 bits.

Two addressing methods are available. Any single port (bit) can be written (set/cleared) at once; or, any sequence of eight ports can be written (set/cleared) in any combination at once. There are no boundaries; it is equally acceptable to write P0 through P7, P1 through P8, or P31 through P38 (P32 through P38 are nonexistent, so the instructions to these bits are ignored).

Using 8-bit control, a seven-segment digit with a decimal point can be updated in a single byte-write, a 14-segment digit with DP can be updated in two byte-writes, and 16-segment digits with DP can be updated in two byte-writes plus a bit write. Also, discrete LEDs and GPIO port bits can be lit and controlled individually without affecting other ports.

Shutdown

When the MAX6957 is in shutdown mode, all ports are forced to inputs, and the pullup current sources are turned off. Data in the port and control registers remain unaltered so port configuration and output levels are restored when the MAX6957 is taken out of shutdown. The display driver can still be programmed while in shutdown mode. For minimum supply current in shutdown mode, logic inputs should be at GND or V+ potential. Shutdown mode is exited by setting the S bit in the configuration register (Table 6). Shutdown mode is temporarily overridden by the display test function.

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

MAX6957

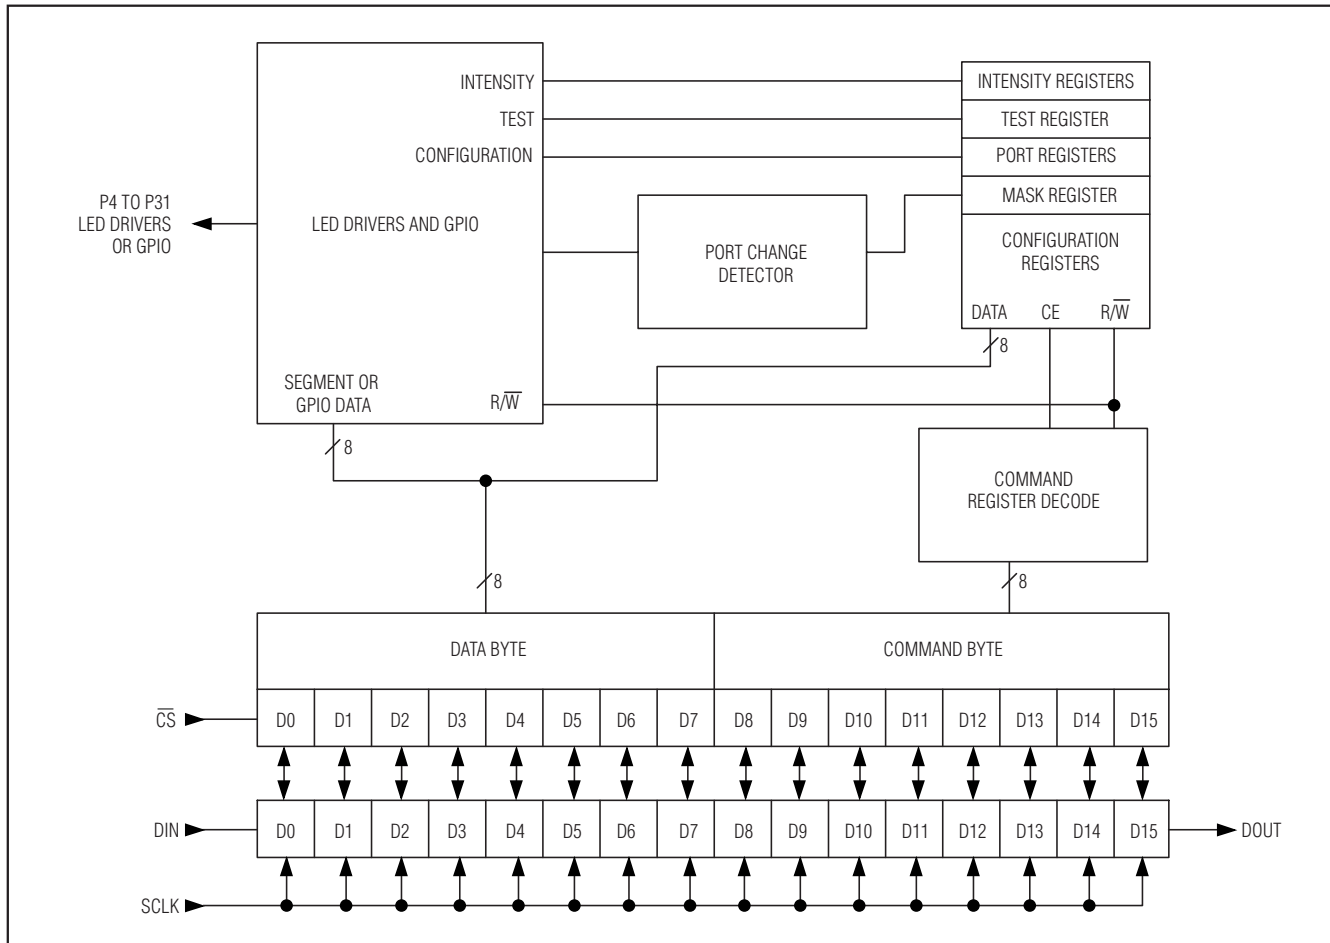


Figure 1. MAX6957 Functional Diagram

Serial Interface

The MAX6957 communicates through an SPI-compatible 4-wire serial interface. The interface has three inputs, Clock (SCLK), Chip Select (\overline{CS}), and Data In (DIN), and one output, Data Out (DOUT). \overline{CS} must be low to clock data into or out of the device, and DIN must be stable when sampled on the rising edge of SCLK. DOUT provides a copy of the bit that was input 15.5 clocks earlier, or upon a query it outputs internal register data, and is stable on the rising edge of SCLK. Note that the SPI protocol expects DOUT to be high impedance when the MAX6957 is not being accessed; DOUT on the MAX6957 is never high impedance.

SCLK and DIN may be used to transmit data to other peripherals, so the MAX6957 ignores all activity on

SCLK and DIN except between the fall and subsequent rise of \overline{CS} .

Control and Operation Using the 4-Wire Interface

Controlling the MAX6957 requires sending a 16-bit word. The first byte, D15 through D8, is the command address (Table 3), and the second byte, D7 through D0, is the data byte (Table 4).

Connecting Multiple MAX6957s to the 4-Wire Bus

Multiple MAX6957s may be daisy-chained by connecting the DOUT of one device to the DIN of the next, and driving SCLK and \overline{CS} lines in parallel (Figure 4). Data at DIN propagates through the internal shift registers and appears at DOUT 15.5 clock cycles later, clocked out on the falling edge of SCLK. When sending commands

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

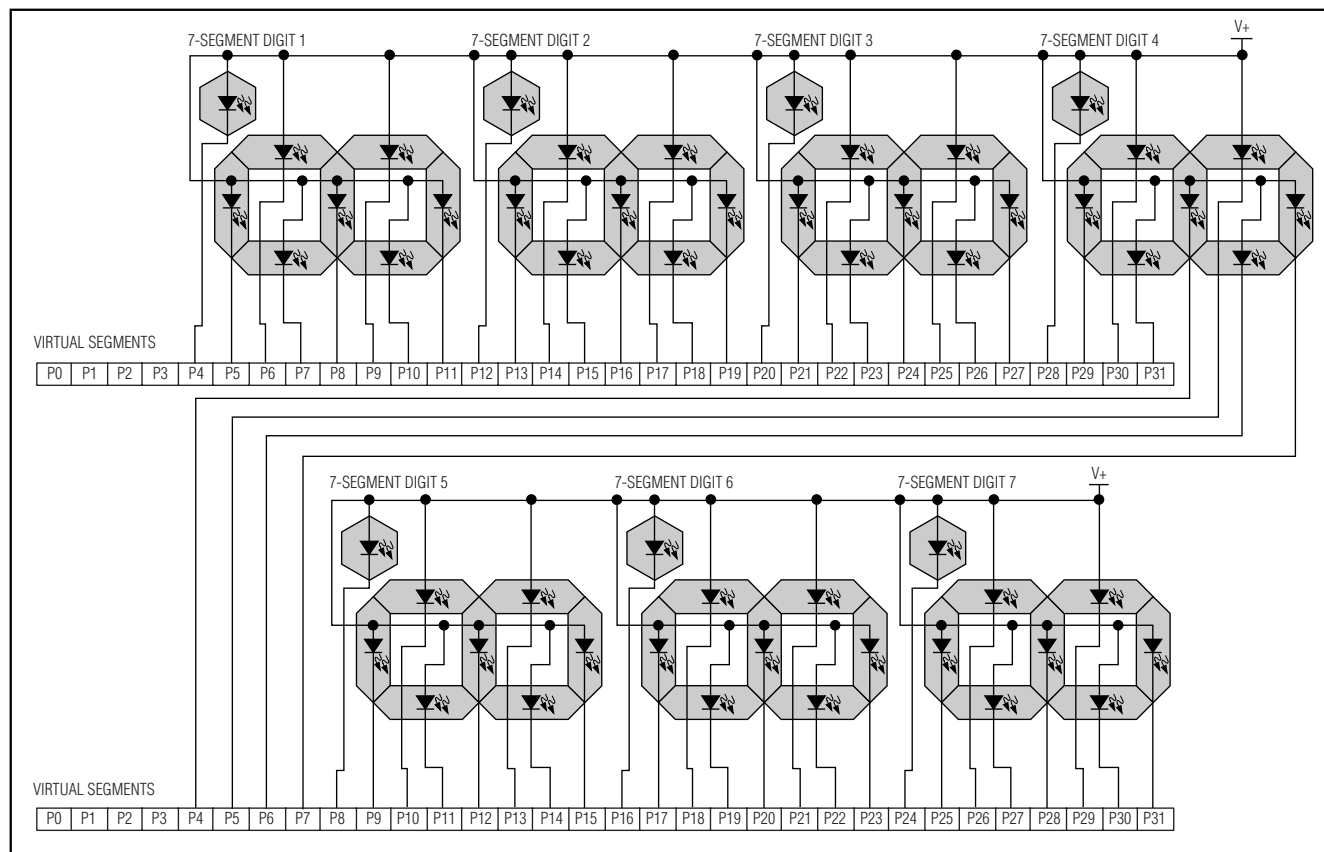


Figure 2. Two MAX6957s Controlling Seven 7-Segment Displays

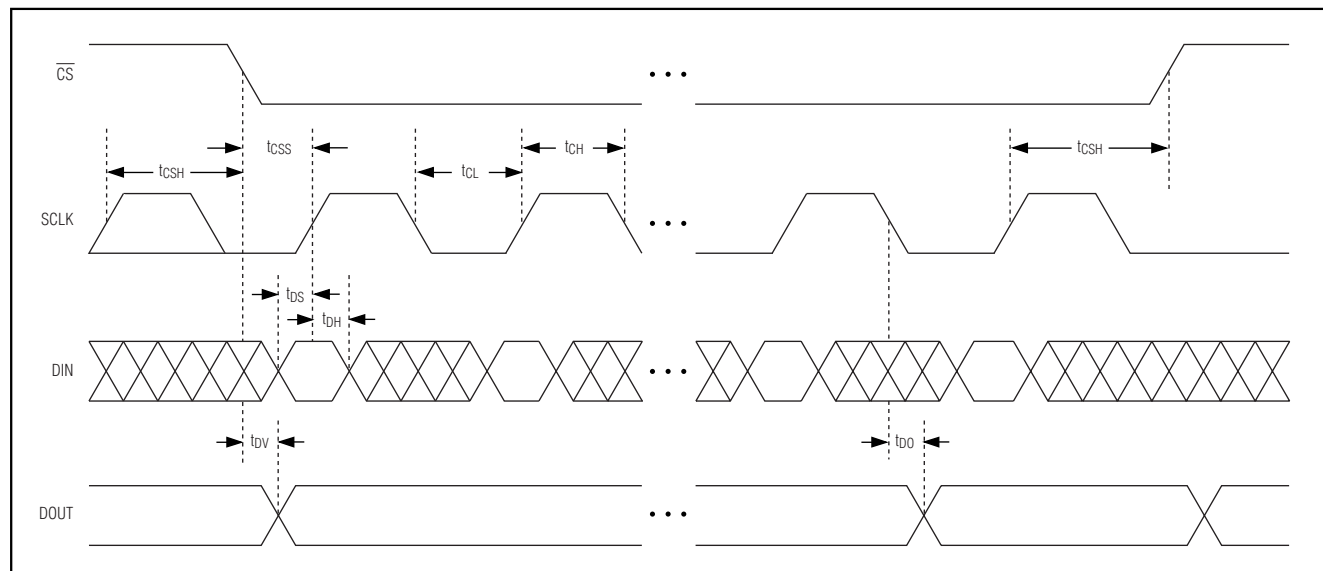


Figure 3. 4-Wire Interface Timing

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

MAX6957

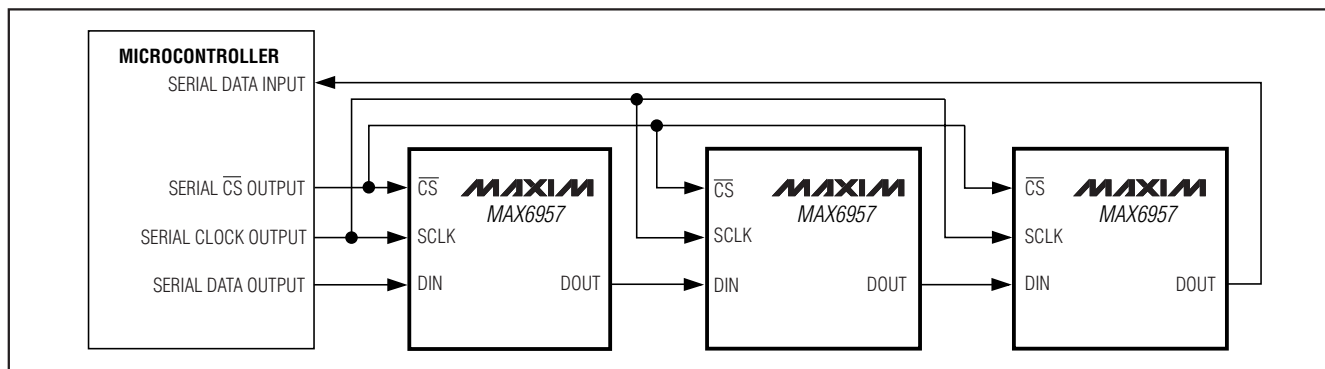


Figure 4. Daisy-Chain Arrangement for Controlling Multiple MAX6957s

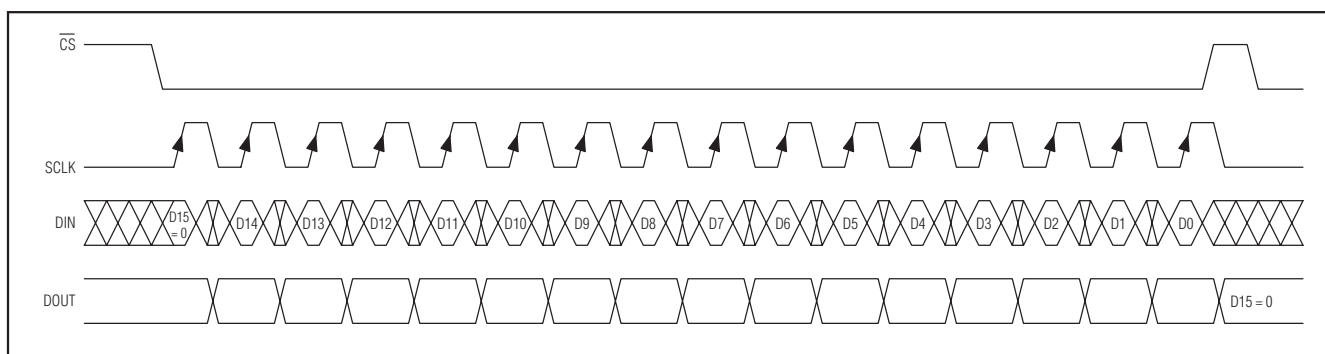


Figure 5. 16-Bit Write Transmission to the MAX6957

to multiple MAX6957s, all devices are accessed at the same time. An access requires $(16 \times n)$ clock cycles, where n is the number of MAX6957s connected together. To update just one device in a daisy-chain, the user can send the No-Op command (0x00) to the others.

Writing Device Registers

The MAX6957 contains a 16-bit shift register into which DIN data are clocked on the rising edge of SCLK, when \overline{CS} is low. When \overline{CS} is high, transitions on SCLK have no effect. When \overline{CS} goes high, the 16 bits in the Shift register are parallel loaded into a 16-bit latch. The 16 bits in the latch are then decoded and executed.

The MAX6957 is written to using the following sequence:

- 1) Take SCLK low.
- 2) Take \overline{CS} low. This enables the internal 16-bit shift register.
- 3) Clock 16 bits of data into DIN—D15 first, D0 last—observing the setup and hold times (bit D15 is low, indicating a write command).

- 4) Take \overline{CS} high (while SCLK is still high after clocking in the last data bit).
- 5) Take SCLK low.

Figure 5 shows a write operation when 16 bits are transmitted.

It is acceptable to clock more than 16 bits into the MAX6957 between taking \overline{CS} low and taking \overline{CS} high again. In this case, only the last 16 bits clocked into the MAX6957 are retained.

Reading Device Registers

Any register data within the MAX6957 may be read by sending a logic high to bit D15. The sequence is:

- 1) Take SCLK low.
- 2) Take \overline{CS} low (this enables the internal 16-bit shift register).
- 3) Clock 16 bits of data into DIN—D15 first to D0 last. D15 is high, indicating a read command and bits D14 through D8 containing the address of the register to be read. Bits D7–D0 contain dummy data, which is discarded.

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

- 4) Take \overline{CS} high (while SCLK is still high after clocking in the last data bit), positions D7 through D0 in the Shift register are now loaded with the register data addressed by bits D1 through D8.
- 5) Take SCLK low.
- 6) Issue another read or write command (which can be a No-Op), and examine the bit stream at DOUT; the second 8 bits are the contents of the register addressed by bits D1 through D8 in step 3.

Initial Power-Up

On initial power-up, all control registers are reset, current registers are set to minimum value, and the MAX6957 enters shutdown mode (Table 4).

LED Current Control

LED segment drive current can be set either globally or individually. Global control simplifies the operation when all LEDs are set to the same current level, because writing one register, the Global Current register, sets the current for all ports configured as LED segment drivers. It is also possible to individually control the current drive of each LED segment driver. Individual/global brightness control is selected by setting the configuration register I bit (Table 7). The global current register (0x02) data are then ignored, and segment currents are set using register addresses 0x12 through 0x1F (Tables 10, 11, and 12). Each segment is controlled by a nibble of one of the 16 current registers.

Transition (Port Data Change) Detection

Port transition detection allows seven maskable ports P24 through P30 to be continuously monitored for changes in their logic status (Figure 6). Enable transition detection by setting the M bit in the configuration register (Table 8) after setting the mask register. If port 31 is configured as an output (Tables 1 and 2), then P31 automatically becomes an interrupt request (IRQ) output to flag detected transitions. Port 31 can be configured and used as a general-purpose input port instead if not required as the IRQ output.

The mask register determines which of the seven ports P24 through P30 are monitored (Table 13). Set the appropriate mask bit to enable that port for transition detect. Clear the mask bit if transitions on that port are to be ignored by the transition detection logic. Ports are monitored regardless of their I/O configuration, both input and output.

The MAX6957 maintains an internal 7-bit snapshot register to hold the comparison copy of the logic states of ports P24 through P30. The snapshot register is updated with the condition of P24 through P31 whenever the

configuration register is written with the M bit set. The update action occurs regardless of the previous state of the M bit so that it is not necessary to clear the M bit and then set it again to update the snapshot register.

When the data change detection bit is set, the MAX6957 continuously compares the snapshot register against the changing states of P24 through P31. When a difference occurs, the IRQ bit (mask register bit D7) is set and IRQ port P31 goes high if it is configured as an output.

The IRQ bit and IRQ output remain set until the mask register is next read or written, so if the IRQ is set, then the mask register reads with bit D7 set. Writing the mask register clears the IRQ output and resets the IRQ bit, regardless of the value of bit D7 written.

Display Test Register

Display test mode turns on all ports configured as LED drivers by overriding, but not altering, all controls and port registers, except the port configuration register (Table 14). Only ports configured as LED drivers are affected. Ports configured as GPIO push-pull outputs do not change state. In display test mode, each port's current is temporarily set to 1/2 the maximum current limit as controlled by R_{SET}.

Selecting External Component R_{SET} to Set Maximum Segment Current

The MAX6957 uses an external resistor R_{SET} to set the maximum segment current. The recommended value, 39k Ω , sets the maximum current to 24mA, which makes the segment current adjustable from 1.5mA to 24mA in 1.5mA steps.

To set a different segment current, use the formula:

$$R_{SET} = 936k\Omega / I_{SEG}$$

where I_{SEG} is the desired maximum segment current in mA.

The recommended value of R_{SET} is 39k Ω .

The recommended value of R_{SET} is the minimum allowed value, since it sets the display driver to the maximum allowed segment current. R_{SET} can be a higher value to set the segment current to a lower maximum value where desired. The user must also ensure that the maximum current specifications of the LEDs connected to the driver are not exceeded.

The drive current for each segment can be controlled through programming either the global current register (Table 9) or individual segment current registers (Tables 10, 11, and 12), according to the setting of the current control bit of the configuration register (Table 7).

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

MAX6957

Table 3. Register Address Map

| REGISTER | COMMAND ADDRESS | | | | | | | | HEX CODE |
|---------------------------------------|-------------------|-----|-----|-----|-----|-----|----|----|----------|
| | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | |
| No-Op | R/ \overline{W} | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0x00 |
| Global Current | R/ \overline{W} | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0x02 |
| Configuration | R/ \overline{W} | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0x04 |
| Transition Detect Mask | R/ \overline{W} | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0x06 |
| Display Test | R/ \overline{W} | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 0x07 |
| Port Configuration P7, P6, P5, P4 | R/ \overline{W} | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 0x09 |
| Port Configuration P11, P10, P9, P8 | R/ \overline{W} | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 0x0A |
| Port Configuration P15, P14, P13, P12 | R/ \overline{W} | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 0x0B |
| Port Configuration P19, P18, P17, P16 | R/ \overline{W} | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0x0C |
| Port Configuration P23, P22, P21, P20 | R/ \overline{W} | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 0x0D |
| Port Configuration P27, P26, P25, P24 | R/ \overline{W} | 0 | 0 | 0 | 1 | 1 | 1 | 0 | 0x0E |
| Port Configuration P31, P30, P29, P28 | R/ \overline{W} | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0x0F |
| Current054 | R/ \overline{W} | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0x12 |
| Current076 | R/ \overline{W} | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 0x13 |
| Current098 | R/ \overline{W} | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 0x14 |
| Current0BA | R/ \overline{W} | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 0x15 |
| Current0DC | R/ \overline{W} | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0x16 |
| Current0FE | R/ \overline{W} | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 0x17 |
| Current110 | R/ \overline{W} | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0x18 |
| Current132 | R/ \overline{W} | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0x19 |
| Current154 | R/ \overline{W} | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 0x1A |
| Current176 | R/ \overline{W} | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 0x1B |
| Current198 | R/ \overline{W} | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 0x1C |
| Current1BA | R/ \overline{W} | 0 | 0 | 1 | 1 | 1 | 0 | 1 | 0x1D |
| Current1DC | R/ \overline{W} | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 0x1E |
| Current1FE | R/ \overline{W} | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0x1F |
| Port 0 only (virtual port, no action) | R/ \overline{W} | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0x20 |
| Port 1 only (virtual port, no action) | R/ \overline{W} | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0x21 |
| Port 2 only (virtual port, no action) | R/ \overline{W} | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 0x22 |
| Port 3 only (virtual port, no action) | R/ \overline{W} | 0 | 1 | 0 | 0 | 0 | 1 | 1 | 0x23 |
| Port 4 only | R/ \overline{W} | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0x24 |
| Port 5 only | R/ \overline{W} | 0 | 1 | 0 | 0 | 1 | 0 | 1 | 0x25 |
| Port 6 only | R/ \overline{W} | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 0x26 |
| Port 7 only | R/ \overline{W} | 0 | 1 | 0 | 0 | 1 | 1 | 1 | 0x27 |
| Port 8 only | R/ \overline{W} | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0x28 |
| Port 9 only | R/ \overline{W} | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 0x29 |
| Port 10 only | R/ \overline{W} | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 0x2A |

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

Table 3. Register Address Map (continued)

| REGISTER | COMMAND ADDRESS | | | | | | | | HEX CODE |
|---|-------------------|-----|-----|-----|-----|-----|----|----|----------|
| | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | |
| Port 11 only | R/ \overline{W} | 0 | 1 | 0 | 1 | 0 | 1 | 1 | 0x2B |
| Port 12 only | R/ \overline{W} | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 0x2C |
| Port 13 only | R/ \overline{W} | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 0x2D |
| Port 14 only | R/ \overline{W} | 0 | 1 | 0 | 1 | 1 | 1 | 0 | 0x2E |
| Port 15 only | R/ \overline{W} | 0 | 1 | 0 | 1 | 1 | 1 | 1 | 0x2F |
| Port 16 only | R/ \overline{W} | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0x30 |
| Port 17 only | R/ \overline{W} | 0 | 1 | 1 | 0 | 0 | 0 | 1 | 0x31 |
| Port 18 only | R/ \overline{W} | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 0x32 |
| Port 19 only | R/ \overline{W} | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0x33 |
| Port 20 only | R/ \overline{W} | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 0x34 |
| Port 21 only | R/ \overline{W} | 0 | 1 | 1 | 0 | 1 | 0 | 1 | 0x35 |
| Port 22 only | R/ \overline{W} | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0x36 |
| Port 23 only | R/ \overline{W} | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 0x37 |
| Port 24 only | R/ \overline{W} | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 0x38 |
| Port 25 only | R/ \overline{W} | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 0x39 |
| Port 26 only | R/ \overline{W} | 0 | 1 | 1 | 1 | 0 | 1 | 0 | 0x3A |
| Port 27 only | R/ \overline{W} | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 0x3B |
| Port 28 only | R/ \overline{W} | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0x3C |
| Port 29 only | R/ \overline{W} | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 0x3D |
| Port 30 only | R/ \overline{W} | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0x3E |
| Port 31 only | R/ \overline{W} | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0x3F |
| 8 ports 0–7 (ports 0–3 are virtual) | R/ \overline{W} | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0x40 |
| 8 ports 1–8 (ports 1, 2, 3 are virtual) | R/ \overline{W} | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0x41 |
| 8 ports 2–9 (ports 2, 3 are virtual) | R/ \overline{W} | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0x42 |
| 8 ports 3–10 (port 3 is virtual) | R/ \overline{W} | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 0x43 |
| 8 ports 4–11 | R/ \overline{W} | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0x44 |
| 8 ports 5–12 | R/ \overline{W} | 1 | 0 | 0 | 0 | 1 | 0 | 1 | 0x45 |
| 8 ports 6–13 | R/ \overline{W} | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 0x46 |
| 8 ports 7–14 | R/ \overline{W} | 1 | 0 | 0 | 0 | 1 | 1 | 1 | 0x47 |
| 8 ports 8–15 | R/ \overline{W} | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0x48 |
| 8 ports 9–16 | R/ \overline{W} | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 0x49 |
| 8 ports 10–17 | R/ \overline{W} | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 0x4A |
| 8 ports 11–18 | R/ \overline{W} | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 0x4B |
| 8 ports 12–19 | R/ \overline{W} | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 0x4C |
| 8 ports 13–20 | R/ \overline{W} | 1 | 0 | 0 | 1 | 1 | 0 | 1 | 0x4D |
| 8 ports 14–21 | R/ \overline{W} | 1 | 0 | 0 | 1 | 1 | 1 | 0 | 0x4E |
| 8 ports 15–22 | R/ \overline{W} | 1 | 0 | 0 | 1 | 1 | 1 | 1 | 0x4F |

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

Table 3. Register Address Map (continued)

| REGISTER | COMMAND ADDRESS | | | | | | | | HEX CODE |
|--------------------|-------------------|-----|-----|-----|-----|-----|----|----|----------|
| | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | |
| 8 ports 16–23 | R/ \overline{W} | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0x50 |
| 8 ports 17–24 | R/ \overline{W} | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 0x51 |
| 8 ports 18–25 | R/ \overline{W} | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 0x52 |
| 8 ports 19–26 | R/ \overline{W} | 1 | 0 | 1 | 0 | 0 | 1 | 1 | 0x53 |
| 8 ports 20–27 | R/ \overline{W} | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 0x54 |
| 8 ports 21–28 | R/ \overline{W} | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0x55 |
| 8 ports 22–29 | R/ \overline{W} | 1 | 0 | 1 | 0 | 1 | 1 | 0 | 0x56 |
| 8 ports 23–30 | R/ \overline{W} | 1 | 0 | 1 | 0 | 1 | 1 | 1 | 0x57 |
| 8 ports 24–31 | R/ \overline{W} | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 0x58 |
| 7 ports 25–31 | R/ \overline{W} | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 0x59 |
| 6 ports 26–31 | R/ \overline{W} | 1 | 0 | 1 | 1 | 0 | 1 | 0 | 0x5A |
| 5 ports 27–31 | R/ \overline{W} | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0x5B |
| 4 ports 28–31 | R/ \overline{W} | 1 | 0 | 1 | 1 | 1 | 0 | 0 | 0x5C |
| 3 ports 29, 30, 31 | R/ \overline{W} | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 0x5D |
| 2 ports 30, 31 | R/ \overline{W} | 1 | 0 | 1 | 1 | 1 | 1 | 0 | 0x5E |
| 1 port 31 only | R/ \overline{W} | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 0x5F |

Note: Unused bits read as 0.

These registers select the LED's constant-current drive from 16 equal fractions of the maximum segment current. The current difference between successive current steps, I_{STEP} , is therefore determined by the formula:

$$I_{STEP} = I_{SEG} / 16$$

If $I_{SEG} = 24\text{mA}$, then $I_{STEP} = 24\text{mA} / 16 = 1.5\text{mA}$.

Applications Information

Driving Bicolor and Tricolor LEDs

Bicolor digits group a red and a green die together for each display element, so that the element can be lit red, green (or orange), depending on which die (or both) is lit. The MAX6957 allows each segment's current to be set individually from 1/16th (minimum current and LED intensity) to 16/16th (maximum current and LED intensity), as well as off (zero current). Thus, a bicolor (red-green) segment pair can be set to 289 color/intensity combinations. A discrete or CA tricolor (red-green-yellow or red-green-blue) segment triad can be set to 4913 color/intensity combinations.

Power Dissipation Issues

Each MAX6957 port can sink a current of 24mA into an LED with a 2.4V forward-voltage drop when operated from a supply voltage of at least 3.0V. The minimum voltage drop across the internal LED drivers is therefore $(3.0\text{V} - 2.4\text{V}) = 0.6\text{V}$. The MAX6957 can sink $28 \times 24\text{mA} = 672\text{mA}$ when all outputs are operating as LED segment drivers at full current. On a 3.3V supply, a MAX6957 dissipates $(3.3\text{V} - 2.4\text{V}) \times 672\text{mA} = 0.6\text{W}$ when driving 28 of these 2.4V forward-voltage drop LEDs at full current. This dissipation is within the ratings of the 36-pin SSOP package with an ambient temperature up to +98°C. If a higher supply voltage is used or the LEDs used have a lower forward-voltage drop than 2.4V, the MAX6957 absorbs a higher voltage, and the MAX6957's power dissipation increases.

If the application requires high drive current and high supply voltage, consider adding a series resistor to each LED to drop excessive drive voltage off-chip. For example, consider the requirement that the MAX6957 must drive LEDs with a 2.0V to 2.4V specified forward-voltage drop, from an input supply range is 5V \pm 5% with a maximum LED current of 20mA. Minimum input supply voltage is 4.75V. Maximum LED series resistor

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

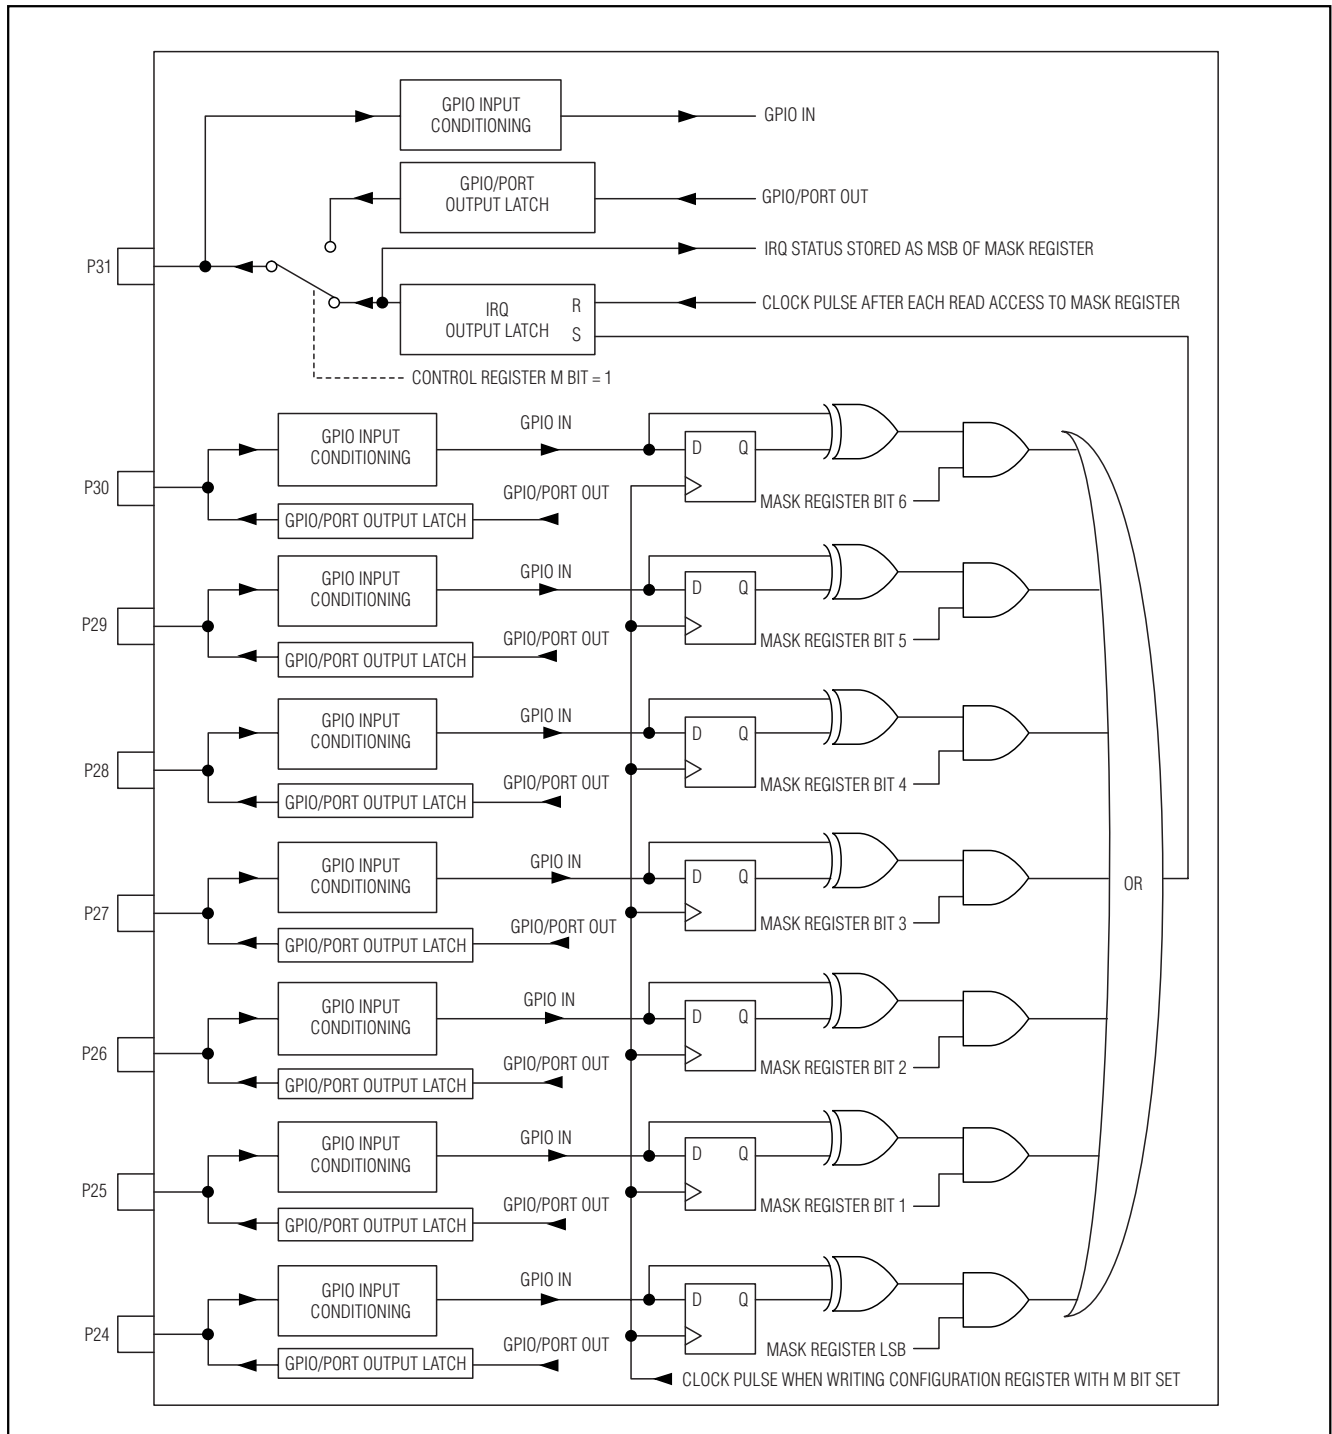


Figure 6. Maskable GPIO Ports P24 Through P31

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

MAX6957

Table 4. Power-Up Configuration

| REGISTER FUNCTION | POWER-UP CONDITION | ADDRESS CODE (HEX) | REGISTER DATA | | | | | | | |
|----------------------------|---|--------------------|---------------|----|----|----|----|----|----|----|
| | | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Port Register Bits 4 to 31 | LED Off; GPIO Output Low | 0x24 to 0x3F | X | X | X | X | X | X | X | 0 |
| Global Current | 1/16 (minimum on) | 0x02 | X | X | X | X | 0 | 0 | 0 | 0 |
| Configuration Register | Shutdown Enabled Current Control = Global Transition Detection Disabled | 0x04 | 0 | 0 | X | X | X | X | X | 0 |
| Input Mask Register | All Clear (Masked Off) | 0x06 | X | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Display Test | Normal Operation | 0x07 | X | X | X | X | X | X | X | 0 |
| Port Configuration | P7, P6, P5, P4: GPIO Inputs Without Pullup | 0x09 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| Port Configuration | P11, P10, P9, P8: GPIO Inputs Without Pullup | 0x0A | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| Port Configuration | P15, P14, P13, P12: GPIO Inputs Without Pullup | 0x0B | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| Port Configuration | P19, P18, P17, P16: GPIO Inputs Without Pullup | 0x0C | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| Port Configuration | P23, P22, P21, P20: GPIO Inputs Without Pullup | 0x0D | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| Port Configuration | P27, P26, P25, P24: GPIO Inputs Without Pullup | 0x0E | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| Port Configuration | P31, P30, P29, P28: GPIO Inputs Without Pullup | 0x0F | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| Current054 | 1/16 (minimum on) | 0x12 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current076 | 1/16 (minimum on) | 0x13 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current098 | 1/16 (minimum on) | 0x14 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current0BA | 1/16 (minimum on) | 0x15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current0DC | 1/16 (minimum on) | 0x16 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current0FE | 1/16 (minimum on) | 0x17 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current110 | 1/16 (minimum on) | 0x18 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current132 | 1/16 (minimum on) | 0x19 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current154 | 1/16 (minimum on) | 0x1A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current176 | 1/16 (minimum on) | 0x1B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current198 | 1/16 (minimum on) | 0x1C | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current1BA | 1/16 (minimum on) | 0x1D | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current1DC | 1/16 (minimum on) | 0x1E | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Current1FE | 1/16 (minimum on) | 0x1F | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

X = unused bits; if read, zero results.

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

Table 5. Configuration Register Format

| FUNCTION | ADDRESS CODE (HEX) | REGISTER DATA | | | | | | | |
|------------------------|--------------------|---------------|----|----|----|----|----|----|----|
| | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Configuration Register | 0x04 | M | I | X | X | X | X | X | S |

X = Don't care bit.

Table 6. Shutdown Control (S Data Bit D0) Format

| FUNCTION | ADDRESS CODE (HEX) | REGISTER DATA | | | | | | | |
|------------------|--------------------|---------------|----|----|----|----|----|----|----|
| | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Shutdown | 0x04 | M | I | X | X | X | X | X | 0 |
| Normal Operation | 0x04 | M | I | X | X | X | X | X | 1 |

X = Don't care bit.

Table 7. Global Current Control (I Data Bit D6) Format

| FUNCTION | ADDRESS CODE (HEX) | REGISTER DATA | | | | | | | |
|---|--------------------|---------------|----|----|----|----|----|----|----|
| | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Global Constant-current limits for all digits are controlled by one setting in the Global Current register, 0x02 | 0x04 | M | 0 | X | X | X | X | X | S |
| Individual Segment Constant-current limit for each digit is individually controlled by the settings in the Current054 through Current1FE registers | 0x04 | M | 1 | X | X | X | X | X | S |

X = Don't care bit.

Table 8. Transition Detection Control (M-Data Bit D7) Format

| FUNCTION | ADDRESS CODE (HEX) | REGISTER DATA | | | | | | | |
|----------|--------------------|---------------|----|----|----|----|----|----|----|
| | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Disabled | 0x04 | 0 | I | X | X | X | X | X | S |
| Enabled | 0x04 | 1 | I | X | X | X | X | X | S |

X = Don't care bit.

Table 9. Global Segment Current Register Format

| LED DRIVE FRACTION | TYPICAL SEGMENT CURRENT (mA) | ADDRESS CODE (HEX) | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | HEX CODE |
|--------------------|------------------------------|--------------------|----|----|----|----|----|----|----|----|----------|
| 1/16 | 1.5 | 0x02 | X | X | X | X | 0 | 0 | 0 | 0 | 0xX0 |
| 2/16 | 3 | 0x02 | X | X | X | X | 0 | 0 | 0 | 1 | 0xX1 |
| 3/16 | 4.5 | 0x02 | X | X | X | X | 0 | 0 | 1 | 0 | 0xX2 |
| 4/16 | 6 | 0x02 | X | X | X | X | 0 | 0 | 1 | 1 | 0xX3 |
| 5/16 | 7.5 | 0x02 | X | X | X | X | 0 | 1 | 0 | 0 | 0xX4 |

X = Don't care bit.

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

MAX6957

Table 9. Global Segment Current Register Format (continued)

| LED DRIVE FRACTION | TYPICAL SEGMENT CURRENT (mA) | ADDRESS CODE (HEX) | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | HEX CODE |
|--------------------|------------------------------|--------------------|----|----|----|----|----|----|----|----|----------|
| 6/16 | 9 | 0x02 | X | X | X | X | 0 | 1 | 0 | 1 | 0xX5 |
| 7/16 | 10.5 | 0x02 | X | X | X | X | 0 | 1 | 1 | 0 | 0xX6 |
| 8/16 | 12 | 0x02 | X | X | X | X | 0 | 1 | 1 | 1 | 0xX7 |
| 9/16 | 13.5 | 0x02 | X | X | X | X | 1 | 0 | 0 | 0 | 0xX8 |
| 10/16 | 15 | 0x02 | X | X | X | X | 1 | 0 | 0 | 1 | 0xX9 |
| 11/16 | 16.5 | 0x02 | X | X | X | X | 1 | 0 | 1 | 0 | 0xXA |
| 12/16 | 18 | 0x02 | X | X | X | X | 1 | 0 | 1 | 1 | 0xXB |
| 13/16 | 19.5 | 0x02 | X | X | X | X | 1 | 1 | 0 | 0 | 0xXC |
| 14/16 | 21 | 0x02 | X | X | X | X | 1 | 1 | 0 | 1 | 0xXD |
| 15/16 | 22.5 | 0x02 | X | X | X | X | 1 | 1 | 1 | 0 | 0xXE |
| 16/16 | 24 | 0x02 | X | X | X | X | 1 | 1 | 1 | 1 | 0xFF |

X = Don't care bit.

Table 10. Individual Segment Current Registers

| REGISTER FUNCTION | ADDRESS CODE (HEX) | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|---------------------|--------------------|------------|----|----|----|------------|----|----|----|
| Current054 register | 0x12 | Segment 5 | | | | Segment 4 | | | |
| Current076 register | 0x13 | Segment 7 | | | | Segment 6 | | | |
| Current098 register | 0x14 | Segment 9 | | | | Segment 8 | | | |
| Current0BA register | 0x15 | Segment 11 | | | | Segment 10 | | | |
| Current0DC register | 0x16 | Segment 13 | | | | Segment 12 | | | |
| Current0FE register | 0x17 | Segment 15 | | | | Segment 14 | | | |
| Current110 register | 0x18 | Segment 17 | | | | Segment 16 | | | |
| Current132 register | 0x19 | Segment 19 | | | | Segment 18 | | | |
| Current154 register | 0x1A | Segment 21 | | | | Segment 20 | | | |
| Current176 register | 0x1B | Segment 23 | | | | Segment 22 | | | |
| Current198 register | 0x1C | Segment 25 | | | | Segment 24 | | | |
| Current1BA register | 0x1D | Segment 27 | | | | Segment 26 | | | |
| Current1DC register | 0x1E | Segment 29 | | | | Segment 28 | | | |
| Current1FE register | 0x1F | Segment 31 | | | | Segment 30 | | | |

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

Table 11. Even Individual Segment Current Format

| LED DRIVE FRACTION | SEGMENT CONSTANT CURRENT WITH $R_{ISET} = 39k\Omega$ (mA) | ADDRESS CODE (HEX) | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | HEX CODE |
|--------------------|---|--------------------|---------------|----|----|----|----|----|----|----|----------|
| 1/16 | 1.5 | 0x12 to 0x1F | See Table 12. | | | | 0 | 0 | 0 | 0 | 0xX0 |
| 2/16 | 3 | 0x12 to 0x1F | | | | | 0 | 0 | 0 | 1 | 0xX1 |
| 3/16 | 4.5 | 0x12 to 0x1F | | | | | 0 | 0 | 1 | 0 | 0xX2 |
| 4/16 | 6 | 0x12 to 0x1F | | | | | 0 | 0 | 1 | 1 | 0xX3 |
| 5/16 | 7.5 | 0x12 to 0x1F | | | | | 0 | 1 | 0 | 0 | 0xX4 |
| 6/16 | 9 | 0x12 to 0x1F | | | | | 0 | 1 | 0 | 1 | 0xX5 |
| 7/16 | 10.5 | 0x12 to 0x1F | | | | | 0 | 1 | 1 | 0 | 0xX6 |
| 8/16 | 12 | 0x12 to 0x1F | | | | | 0 | 1 | 1 | 1 | 0xX7 |
| 9/16 | 13.5 | 0x12 to 0x1F | | | | | 1 | 0 | 0 | 0 | 0xX8 |
| 10/16 | 15 | 0x12 to 0x1F | | | | | 1 | 0 | 0 | 1 | 0xX9 |
| 11/16 | 16.5 | 0x12 to 0x1F | | | | | 1 | 0 | 1 | 0 | 0xXA |
| 12/16 | 18 | 0x12 to 0x1F | | | | | 1 | 0 | 1 | 1 | 0xXB |
| 13/16 | 19.5 | 0x12 to 0x1F | | | | | 1 | 1 | 0 | 0 | 0xXC |
| 14/16 | 21 | 0x12 to 0x1F | | | | | 1 | 1 | 0 | 1 | 0xDD |
| 15/16 | 22.5 | 0x12 to 0x1F | | | | | 1 | 1 | 1 | 0 | 0xEE |
| 16/16 | 24 | 0x12 to 0x1F | | | | | 1 | 1 | 1 | 1 | 0xFF |

value is $(4.75V - 2.4V - 0.6V)/0.020A = 87.5\Omega$. We choose $82\Omega \pm 2\%$. Worst-case resistor dissipation is at maximum toleranced resistance, i.e., $(0.020A)^2 \times (82\Omega \times 1.02) = 34mW$. The maximum MAX6957 dissipation per LED is at maximum input supply voltage, minimum toleranced resistance, minimum toleranced LED forward-voltage drop, i.e., $0.020 \times (5.25V - 2.0V - (0.020A \times 82\Omega \times 0.98)) = 32.86mW$. Worst-case MAX6957 dissipation is 920mW, driving all 28 LEDs at 20mA full current at once, which meets the 941mW dissipation ratings of the 36-pin SSOP package.

Low-Voltage Operation

The MAX6957 operates down to 2V supply voltage (although the sourcing and sinking currents are not guaranteed), providing that the MAX6957 is powered up initially to at least 2.5V to trigger the device's internal reset, and also that the serial interface is constrained to 10Mbps.

Power-Supply Considerations

The MAX6957 operates with power-supply voltages of 2.5V to 5.5V. Bypass the power supply to GND with a $0.047\mu F$ capacitor as close to the device as possible. Add a $1\mu F$ capacitor if the MAX6957 is far away from the board's input bulk decoupling capacitor.

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

MAX6957

Table 12. Odd Individual Segment Current Format

| LED DRIVE FRACTION | SEGMENT CONSTANT CURRENT WITH $R_{SET} = 39k\Omega$ (mA) | ADDRESS CODE (HEX) | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | HEX CODE |
|--------------------|--|--------------------|----|----|----|----|---------------|----|----|----|----------|
| 1/16 | 1.5 | 0x12 to 0x1F | 0 | 0 | 0 | 0 | See Table 11. | | | | 0x0X |
| 2/16 | 3 | 0x12 to 0x1F | 0 | 0 | 0 | 1 | | | | | 0x1X |
| 3/16 | 4.5 | 0x12 to 0x1F | 0 | 0 | 1 | 0 | | | | | 0x2X |
| 4/16 | 6 | 0x12 to 0x1F | 0 | 0 | 1 | 1 | | | | | 0x3X |
| 5/16 | 7.5 | 0x12 to 0x1F | 0 | 1 | 0 | 0 | | | | | 0x4X |
| 6/16 | 9 | 0x12 to 0x1F | 0 | 1 | 0 | 1 | | | | | 0x5X |
| 7/16 | 10.5 | 0x12 to 0x1F | 0 | 1 | 1 | 0 | | | | | 0x6X |
| 8/16 | 12 | 0x12 to 0x1F | 0 | 1 | 1 | 1 | | | | | 0x7X |
| 9/16 | 13.5 | 0x12 to 0x1F | 1 | 0 | 0 | 0 | | | | | 0x8X |
| 10/16 | 15 | 0x12 to 0x1F | 1 | 0 | 0 | 1 | | | | | 0x9X |
| 11/16 | 16.5 | 0x12 to 0x1F | 1 | 0 | 1 | 0 | | | | | 0xAx |
| 12/16 | 18 | 0x12 to 0x1F | 1 | 0 | 1 | 1 | | | | | 0xBx |
| 13/16 | 19.5 | 0x12 to 0x1F | 1 | 1 | 0 | 0 | | | | | 0xCx |
| 14/16 | 21 | 0x12 to 0x1F | 1 | 1 | 0 | 1 | | | | | 0xDx |
| 15/16 | 22.5 | 0x12 to 0x1F | 1 | 1 | 1 | 0 | | | | | 0xEx |
| 16/16 | 24 | 0x12 to 0x1F | 1 | 1 | 1 | 1 | | | | | 0xFx |

X = Don't care bit.

Table 13. Transition Detection Mask Register

| FUNCTION | REGISTER ADDRESS (HEX) | READ/ WRITE | REGISTER DATA | | | | | | | |
|--------------------|------------------------|-------------|---------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Read Mask Register | 0x06 | Read | IRQ Status* | Port 30 mask | Port 29 mask | Port 28 mask | Port 27 mask | Port 26 mask | Port 25 mask | Port 24 mask |
| | | Write | Unchanged | | | | | | | |

*IRQ is automatically cleared after it is read.


Table 14. Display Test Register

| MODE | ADDRESS CODE (HEX) | REGISTER DATA | | | | | | | |
|-------------------|--------------------|---------------|----|----|----|----|----|----|----|
| | | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| Normal Operation | 0x07 | X | X | X | X | X | X | X | 0 |
| Display Test Mode | 0x07 | X | X | X | X | X | X | X | 1 |

X = Don't care bit.

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

Pin Configurations (continued)

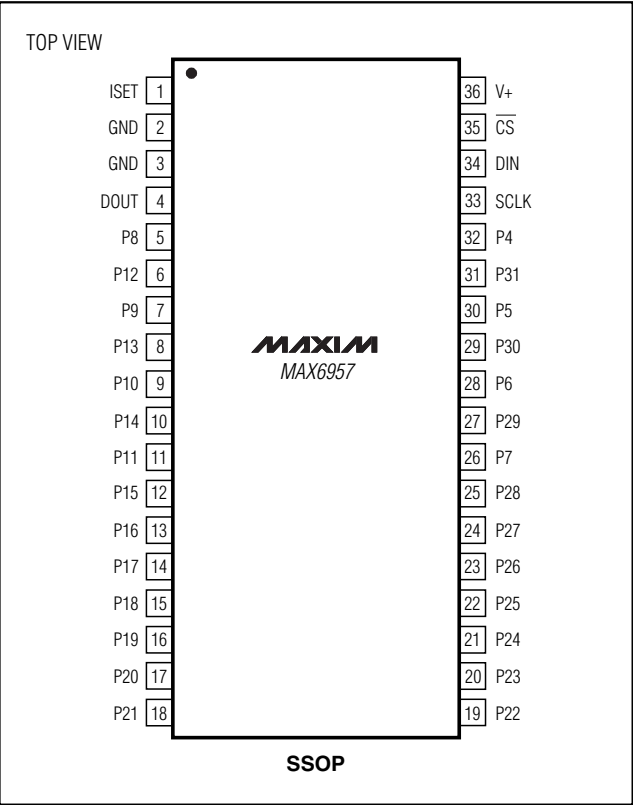


Chip Information

TRANSISTOR COUNT: 30,316
PROCESS: CMOS

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

Typical Operating Circuit


MAX6957

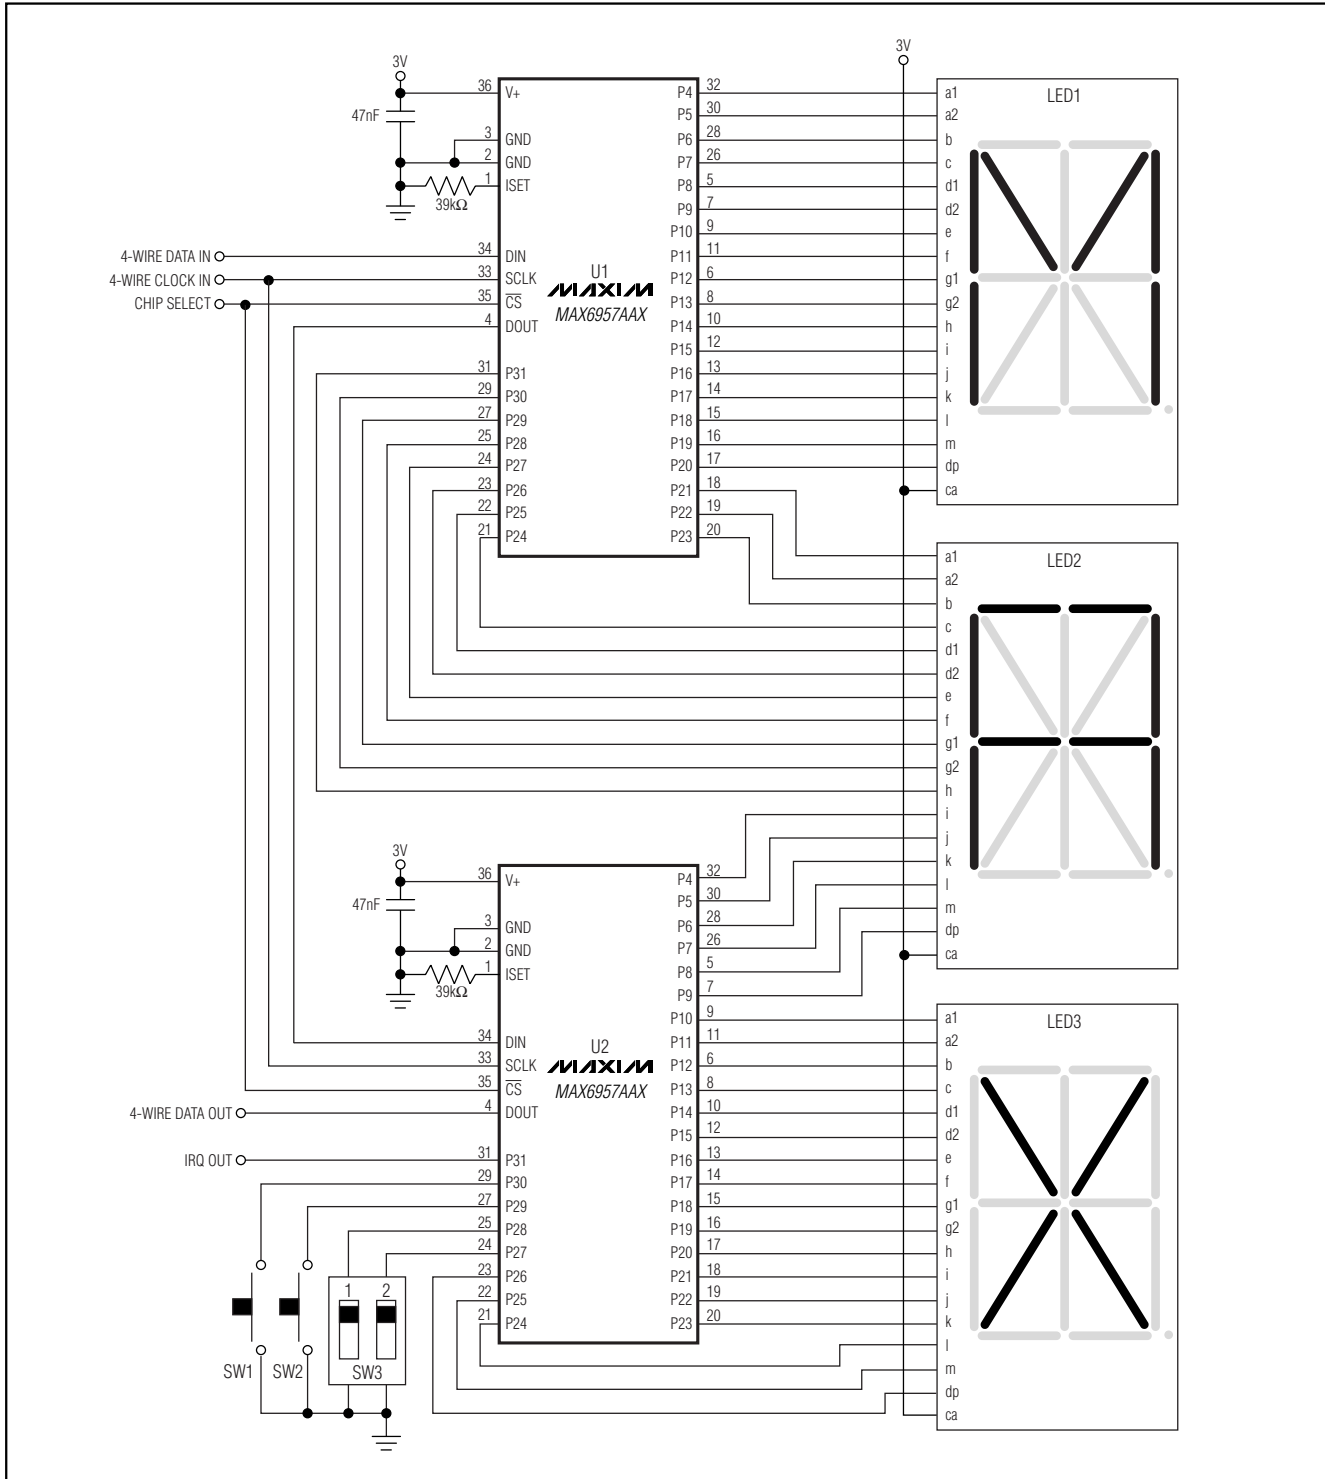

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander



Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

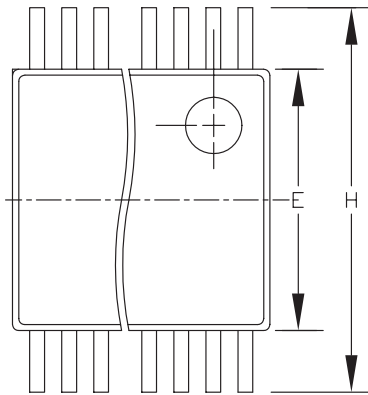

| DIM | INCHES | | MILLIMETERS | |
|----------|----------------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | 0.068 | 0.078 | 1.73 | 1.99 |
| A1 | 0.002 | 0.008 | 0.05 | 0.21 |
| B | 0.010 | 0.015 | 0.25 | 0.38 |
| C | 0.004 | 0.008 | 0.09 | 0.20 |
| D | SEE VARIATIONS | | | |
| E | 0.205 | 0.209 | 5.20 | 5.38 |
| e | 0.0256 | BSC | 0.65 | BSC |
| H | 0.301 | 0.311 | 7.65 | 7.90 |
| L | 0.025 | 0.037 | 0.63 | 0.95 |
| α | 0° | 8° | 0° | 8° |

| | INCHES | | MILLIMETERS | | N |
|---|--------|-------|-------------|-------|-----|
| | MIN | MAX | MIN | MAX | |
| D | 0.239 | 0.249 | 6.07 | 6.33 | 14L |
| D | 0.239 | 0.249 | 6.07 | 6.33 | 16L |
| D | 0.278 | 0.289 | 7.07 | 7.33 | 20L |
| D | 0.317 | 0.328 | 8.07 | 8.33 | 24L |
| D | 0.397 | 0.407 | 10.07 | 10.33 | 28L |

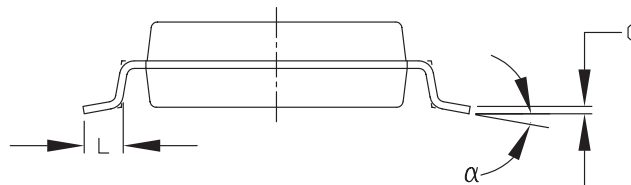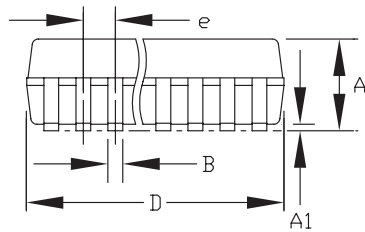

NOTES:

1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006").
3. CONTROLLING DIMENSION: MILLIMETERS.
4. MEETS JEDEC MO150.

| MAXIM | | | |
|----------------------------------|----------------------|-----|-----|
| PROPRIETARY INFORMATION | | | |
| TITLE: | | | |
| PACKAGE OUTLINE, SSOP, 5.3x6.5mm | | | |
| APPROVAL | DOCUMENT CONTROL NO. | REV | 1/1 |
| | 21-0056 | B | |


SSOP-PS

4-Wire-Interfaced, 2.5V to 5.5V, 20-Port and 28-Port LED Display Driver and I/O Expander

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

MAX6957

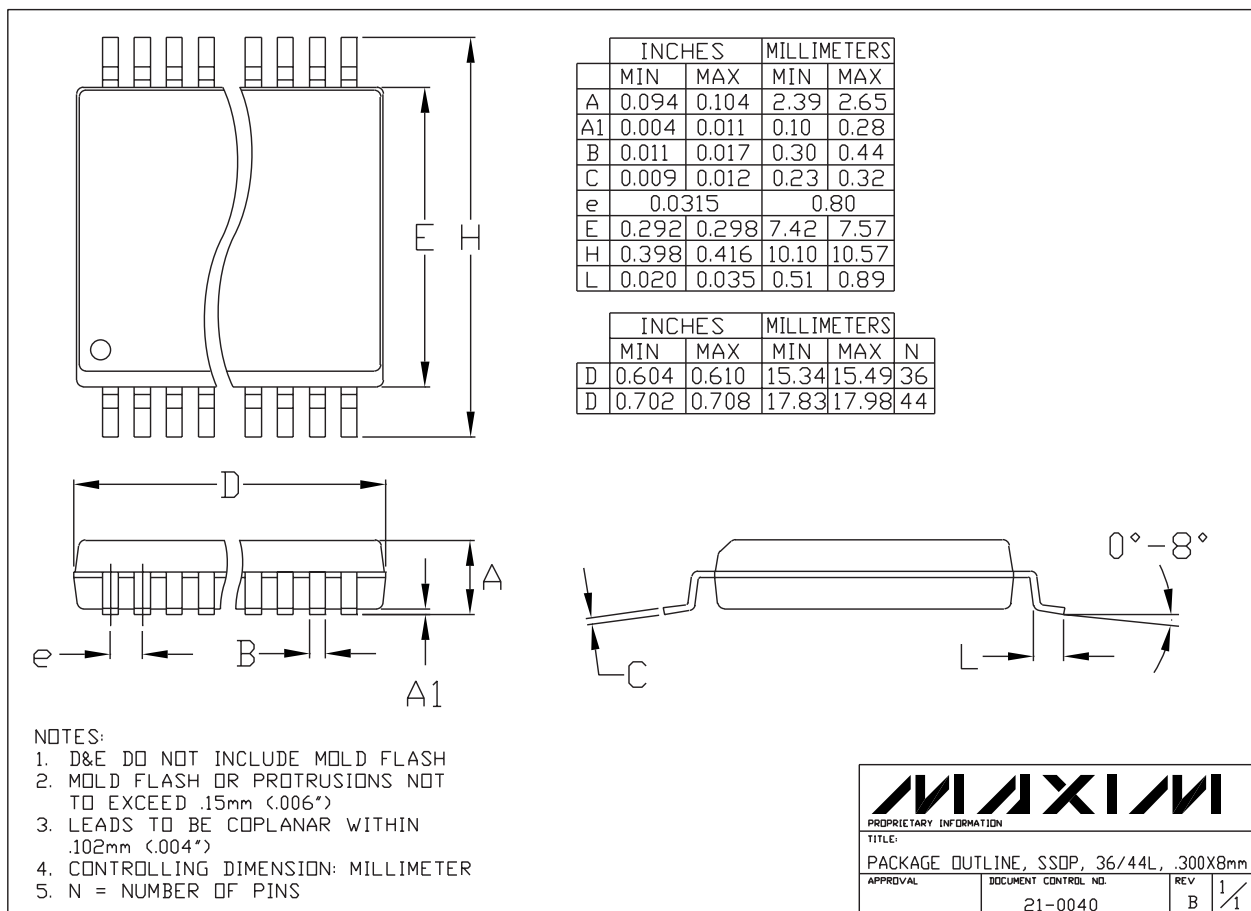

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 23