


DESCRIPTION

MGB75D is high brightness output green LED lamp encapsulated in a 1.9mm x 3.1mm rectangular bars with green diffused lens.

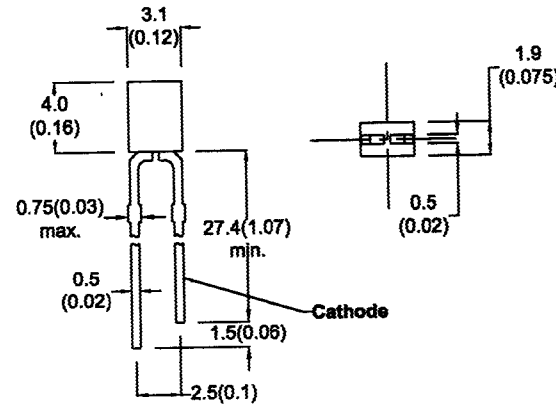

- All dimension in mm(inch)
- No Scale
- Tol. : +/-0.3mm

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @ $T_a=25^{\circ}\text{C}$
Forward Current, DC (IF)
Reverse Voltage
Operating & Storage Temperature Range
Lead Temperature

100mW
30mA
5V
-55 to +100°C
260°C

ELECTRO-OPTICAL CHARACTERISTICS($T_a=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	VF			3.0	V	IF=20mA
Reverse Breakdown Voltage	BVR	5			V	IR=100μA
Luminous Intensity	IV	4	8		mcd	IF=20mA
Peak Wavelength	λ_p		570		nm	IF=20mA
Spectral Line Half Width	$\Delta\lambda$		30		nm	IF=20mA



MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Tel: 2343 0181-5