

DESCRIPTION


MORB51 Series are red LED lamp with 5mm diameter epoxy package.

MRB51C is red chip with red transparent lens.

MB51D is red chip with red diffused lens.

MRB51T is red chip with clear transparent lens.

MRB51W is red chip with clear diffused lens.

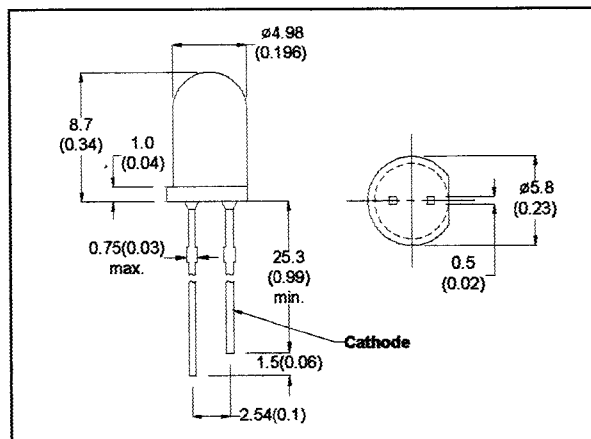

- All Dimension in mm (inch)
- No Scale
- Tol : + / - 0.3mm

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @ Ta=25°C

80mW

Forward Current, DC (IF)

40mA

Reverse Voltage

5V

Operating & Storage Temperature Range

-55 to +100°C

Lead Soldering Temperature (1/16" from body)

260°C for 5 sec.

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MRB51C	MRB51D	MRB51T	MRB51W	UNIT	CONDITIONS
Forward Voltage	MAX	VF	2.0	2.0	2.0	V	IF=20mA
Reverse Breakdown Voltage	MIN	BVR	5	5	5	V	IR=100 μ A
Luminous Intensity	MIN	IV	8	3	8	mcd	IF=20mA
	TYP		12	4.5	12	mcd	
Peak Wavelength	TYP	λ_p	660	660	660	nm	IF=20mA
Spectral Line Half Width	TYP	$\Delta\lambda$	20	20	20	nm	IF=20mA

Rev.A.

MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

Page 1 of 2

Sep-99

MRB51D

