

RECTIFIER ASSEMBLIES

High Voltage Stacks, .125 Amp to 1 Amp,
Standard and Fast Recovery

US12-US200A
USR12-USR180A

3

FEATURES




- Controlled Avalanche Characteristics
- Recovery Times: to 500ns
- Transfer Molded for Voidless Encapsulation
- High Forward and Reverse Surge Capability
- PIV: from 1200 to 20,000V
- Only Fused-in-Glass Diodes Used

DESCRIPTION

This series of High Voltage, Medium Current Stacks are assembled from hermetically sealed, controlled avalanche individual diodes. Therefore, they offer the ultimate in reliability for such applications as clipper diodes, back swing diodes and hold-off diodes in pulse modulators.


ABSOLUTE MAXIMUM RATINGS

Peak Inverse Voltage 1200 to 20,000V
Maximum Average D.C. Output Current See Electrical Specifications
Non-Repetitive Sinusoidal Surge (8.3ms) 20A
Operating and Storage Temperature Range -65°C to +150°C

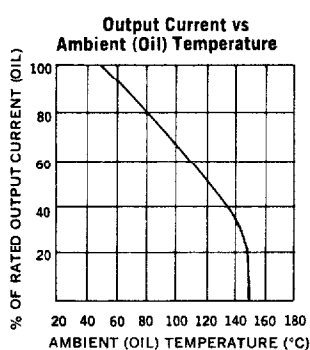


Electrical Specifications (at 25°C unless noted)							Maximum Ratings	
Type	PIV	Maximum Leakage Current at PIV		Maximum Forward Voltage Drop	Maximum Reverse Recovery Time†	Body Size	Max. Avg. D.C. Output Current	
		T _A = 25°C	T _A = 100°C				T _A = 25°C (Air)	T _A = 50°C (Oil)
	V	μA	μA		ns		mA	mA
Standard Recovery								
US 12	1200	2	100	2.0V @ 400mA	—	SA	1000	2500
US 15	1500	2	100	3.0V @ 400mA		SA	800	2000
US 18	1800	2	100	3.0V @ 400mA		SA	700	1750
US 20	2000	2	100	4.0V @ 400mA		SA	600	1500
US 25	2500	2	100	5.0V @ 400mA	—	SB	600	1500
US 30	3000	2	100	6.0V @ 400mA		SB	500	1250
US 35	3500	2	100	7.0V @ 200mA	—	SC	400	1000
US 40	4000	2	100	7.0V @ 200mA		SC	350	850
US 45A	4500	2	100	8.0V @ 200mA	—	SD	330	750
US 50A	5000	2	100	9.0V @ 200mA		SD	330	750
US 60A	6000	2	100	10.0V @ 200mA		SD	300	620
US 70A	7000	2	100	12.0V @ 200mA		SD	300	620
US 80A	8000	2	100	14.0V @ 100mA	—	SE	250	500
US 100A	10000	2	100	17.0V @ 100mA		SE	250	500
US 120A	12000	2	100	21.0V @ 100mA		SE	200	400
US 150A	15000	2	100	26.0V @ 100mA	—	SF	200	400
US 180A	18000	2	100	31.0V @ 100mA		SF	180	360
US 200A	20000	2	100	34.0V @ 100mA		SF	180	360
Fast Recovery								
USR 12	1200	5	150	3.3V @ 400mA	500	SA	750	1850
USR 15	1500	5	150	4.0V @ 400mA	500	SA	600	1500
USR 20	2000	5	150	5.5V @ 400mA	500	SB	500	1250
USR 25	2500	5	150	6.6V @ 400mA	500	SB	400	1000
USR 30	3000	5	150	7.7V @ 400mA	500	SC	400	1000
USR 35	3500	5	150	8.8V @ 200mA	500	SC	350	850
USR 40A	4000	5	150	9.9V @ 200mA	500	SD	300	750
USR 45A	4500	5	150	11.0V @ 100mA	500	SD	250	625
USR 50A	5000	5	150	13.0V @ 100mA	500	SD	250	625
USR 60A	6000	5	150	15.4V @ 100mA	500	SD	220	500
USR 70A	7000	5	150	17.6V @ 100mA	500	SE	220	500
USR 80A	8000	5	150	20.0V @ 100mA	500	SE	200	400
USR 100A	10000	5	150	24.0V @ 100mA	500	SE	200	400
USR 120A	12000	5	150	31.0V @ 100mA	500	SF	150	300
USR 150A	15000	5	150	33.0V @ 100mA	500	SF	150	300
USR 180A	18000	5	150	35.0V @ 100mA	500	SF	125	250


†Measured in a reverse recovery circuit switching from 10mA forward to 10mA reverse current recovering to 5mA.

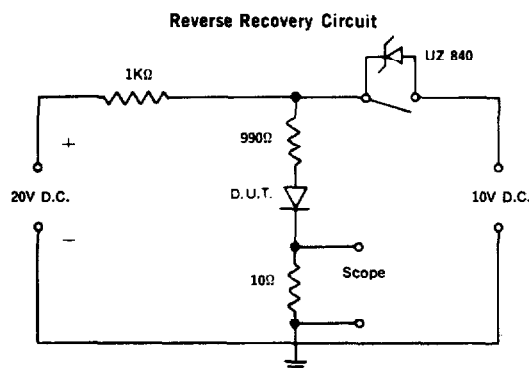


Typical Forward Current vs. Forward Voltage

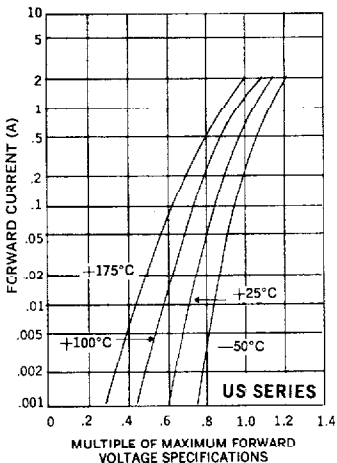


Typical Forward Current vs. Forward Voltage

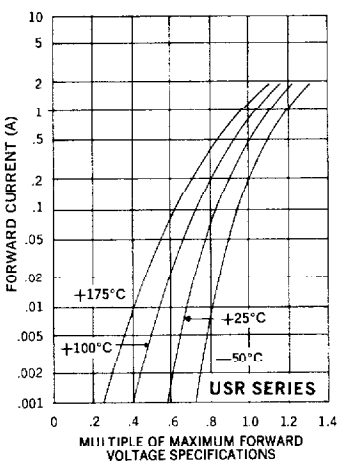


Typical Leakage Current vs. Voltage

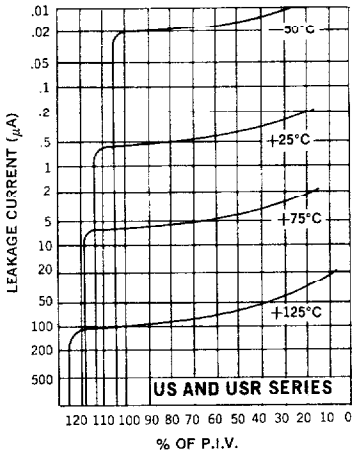


Forward Pulse Current vs. Duration

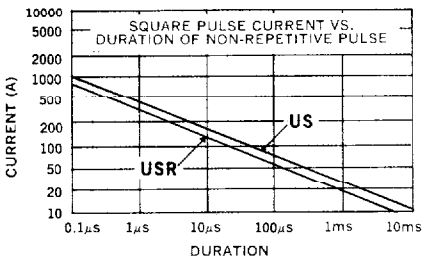


Multiple Forward Surge Rating

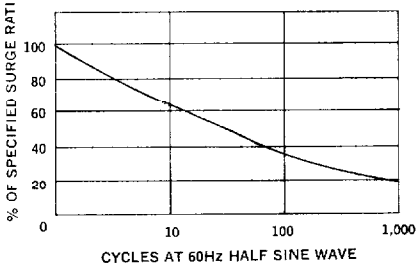



MECHANICAL SPECIFICATIONS





BODY SA






BODY SB






BODY SC



BODY SD



BODY SE

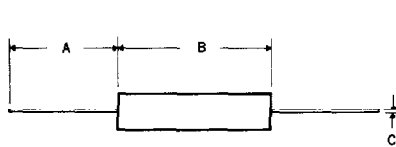

BODY SF

	SA		SB		SC		SD		SE		SF	
	ins.	mm.	ins.	mm.	ins.	mm.	ins.	mm.	ins.	mm.	ins.	mm.
A	.75 MIN.	19.05 MIN.	1.25 MIN.	31.75 MIN.	1.25 MIN.	31.75 MIN.	1.25 MIN.	31.75 MIN.	1.25 MIN.	31.75 MIN.	1.25 MIN.	31.75 MIN.
B	.50 MAX.	12.70 MAX.	0.85 MAX.	21.59 MAX.	1.125 MAX.	28.58 MAX.	.875 MAX.	22.23 MAX.	1.375 MAX.	34.93 MAX.	1.75 MAX.	44.45 MAX.
C	.028 DIA.	.71 DIA.	.032 DIA.	.81 DIA.	.032 DIA.	.81 DIA.	.032 DIA.	.81 DIA.	.032 DIA.	.81 DIA.	.032 DIA.	.81 DIA.
D	.187 MAX.	4.75 MAX.	.187 MAX.	4.75 MAX.	.187 MAX.	4.75 MAX.	.250 MAX.	6.35 MAX.	.250 MAX.	6.35 MAX.	.400 MAX.	10.16 MAX.
E							.375 MAX.	9.53 MAX.	.375 MAX.	9.53 MAX.	.400 MAX.	10.16 MAX.
F									.078	1.98	.078	1.98