


3 Phase Bridge Modules EH80, EH100

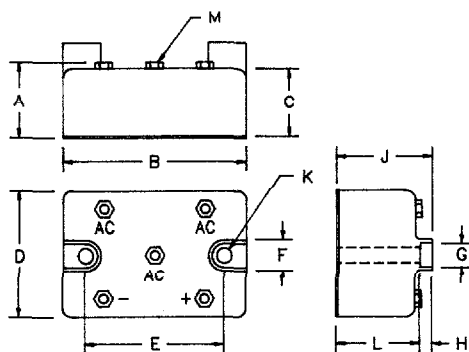

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	—	1.10	—	27.94	
B	2.25	2.40	57.15	60.96	
C	.930	.950	23.62	24.13	
D	1.740	1.760	44.19	44.70	
E	1.883	1.887	47.82	47.92	
F	.495	.505	12.57	12.83	
G	.325	.335	8.25	8.50	
H	.215	.225	5.46	5.71	
J	1.270	1.300	32.25	33.02	
K	.198	.208	5.02	5.28	Dia.
L	1.055	1.075	26.79	27.30	
M	#10-32 Tapped Holes				

Microsemi Catalog Number

EH8002Zi*	EH10002Zi*
EH8004Zi*	EH10004Zi*
EH8006Zi*	EH10006Zi*
EH8008Zi*	EH10008Zi*
EH8010Zi*	EH10010Zi*
EH8012Zi*	EH10012Zi*

Repetitive Peak Reverse Voltage

200
400
600
800
1000
1200

*Add S for Transient Suppressor across output

- Integral Transient Suppression Available
- High Terminal-to-base Isolation of 2500VAC RMS
- Available to 1200V
- Mounting Bolts Isolated From Power Terminals

Electrical Characteristics

	EH80	EH100	
Maximum DC output current, 3-phase	80A	100A	Sine wave, 120° conduction
Maximum case temperature	138°C	141°C	
Maximum surge current per diode	1050A	1500A	8.3ms, half sine, T _J = 175°C
Max. I _{2t} for fusing	4600A ² S	9300A ² S	
Max. peak forward voltage per diode	V _{FM} 1.2V	1.1V	• I _o ; T _J = 25°C
Max. peak reverse voltage per diode	V _{RM} 4mA		V _{RRM} , T _J = 150°C
Minimum isolation voltage	V _{SOL} 2500V _{RMS}		any terminal-to-base

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-40°C to 175°C
Operating junction temp range	T _J	-40°C to 175°C
Max thermal resistance per diode	EH80 R _{θJC}	1.0°C/W Junction to case
	EH100 R _{θJC}	0.85°C/W Junction to case
Max mounting torque		30 lb-in
Typical thermal resistance	R _{θCS}	0.07°C/W Case to sink
Typical Weight		5.8 ounces (165 grams)

Microsemi Corp.
Colorado

PH: 303-469-2161
FAX: 303-466-3775

E-69

EH80, EH100

Figure 1
Typical Forward Characteristics - Per Diode

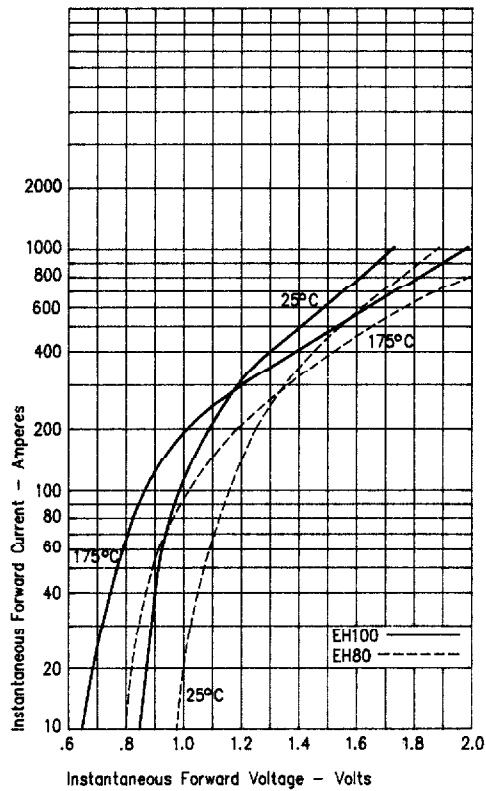


Figure 3
Maximum Nonrepetitive Surge Current - Per Diode

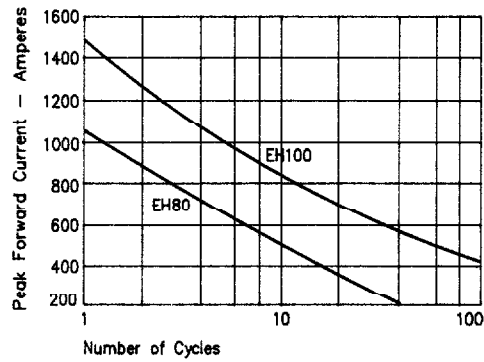


Figure 2
Forward Current Derating - Per Diode

