



Microsemi Corp.

The diode experts

SCOTTSDALE, AZ

For more information call:
(602) 941-6300

**ICTE-5
thru
ICTE-45C**

FEATURES

- DESIGNED TO PROTECT BIPOLAR, MOS, AND SCHOTTKY IMPROVED INTEGRATED CIRCUITS FROM ELECTRICAL DISTURBANCES.
- TRANSIENT PROTECTION FOR CMOS, MOS, BIPOLAR, ICs, (TTL, ECL, DTL, RTL AND LINEAR FUNCTIONS)
- VOLTAGE RANGE OF 5.0 to 45 VOLTS
- LOW CLAMPING RATIO

MAXIMUM RATINGS

1500 Watts of Peak Pulse Power dissipation at 25°C and 10 x 1000μs
t_{clamping} (0 volts to V_(BR) min.): Unidirectional—Less than 1 x 10⁻¹² seconds

Bidirectional—Less than 5 x 10⁻⁹ seconds

Operating and Storage Temperatures: -65° to +175°C

Forward Surge Rating: 200 amps, 1/120 second at 25°C

(Applies to Unidirectional or single direction only)

Steady State power dissipation: 5.0 watts @ T_L = 75°C, Lead Length = 3/8"

Repetition rate (duty cycle): .05%


ELECTRICAL CHARACTERISTICS

Clamping Factor: 1.33 @ Full rated power

1.20 @ 50% rated power

Clamping Factor: The ratio of the actual V_C (Clamping Voltage) to the actual V_(BR) (Breakdown Voltage) as measured on a specific device.

TRANSIENT ABSORPTION ZENER



MECHANICAL CHARACTERISTICS

CASE: Void free, molded thermal-setting plastic

FINISH: Silver plated copper readily solderable

POLARITY: Band denotes cathode

WEIGHT: 1.5 grams (Appx.)

MOUNTING POSITION: Any

ICTE - 5 thru ICTE - 45C

ELECTRICAL CHARACTERISTICS @ 25°C

MICROSEMI PART NUMBER	STAND-OFF VOLTAGE (Note 1) V_{WM} VOLTS	MAXIMUM REVERSE LEAKAGE @ V_{WM} I_{p} μA	MINIMUM* BREAKDOWN VOLTAGE @ 1 mA $V_{(BR)}$ (min.) VOLTS	MAXIMUM CLAMPING VOLTAGE (Fig. 2) @ $I_{PP1} = 1A$ V_C VOLTS	MAXIMUM CLAMPING VOLTAGE (Fig. 2) @ $I_{PP2} = 10A$ V_C VOLTS	MAXIMUM PEAK PULSE CURRENT @ $10 \times 1000 \mu s$ I_{PP3} A
ICTE-5	5.0	300	6.0	7.1	7.5	160
ICTE-8	8.0	25	9.4	11.3	11.5	100
ICTE-10	10.0	2	11.7	13.7	14.1	90
ICTE-12	12.0	2	14.1	16.1	16.5	70
ICTE-15	15.0	2	17.6	20.1	20.6	60
ICTE-18	18.0	2	21.2	24.2	25.2	50
ICTE-22	22.0	2	25.9	29.8	32.0	40
ICTE-36	36.0	2	42.4	50.6	54.3	23
ICTE-45	45.0	2	52.9	63.3	70.0	19

V_f at 100 amps peak, 8.3 msec sine wave equals 3.5 volts maximum

ELECTRICAL CHARACTERISTICS @ 25°C (Test Both Polarities)

ICTE-5C	5.0	300	6.0	7.1	7.5	160
ICTE-8C	8.0	25	9.4	11.4	11.6	100
ICTE-10C	10.0	2	11.7	14.1	14.5	90
ICTE-12C	12.0	2	14.1	16.7	17.1	70
ICTE-15C	15.0	2	17.6	20.8	21.4	60
ICTE-18C	18.0	2	21.2	24.8	25.5	50
ICTE-22C	22.0	2	25.9	30.8	32.0	40
ICTE-36C	36.0	2	42.4	50.6	54.3	23
ICTE-45C	45.0	2	52.9	63.3	70.0	19

C Suffix indicates Bidirectional

NOTE 1: TAZ are normally selected according to the reverse "Stand Off Voltage" V_{WM} which should be equal to or greater than the DC or continuous peak operating voltage level.

*The minimum breakdown voltage as shown takes into consideration the ± 1 volt tolerance normally specified for power supply regulation on most integrated circuit manufacturers data sheets. Similar devices are available with reduced clamping voltages where tighter regulated power supply voltages are employed.



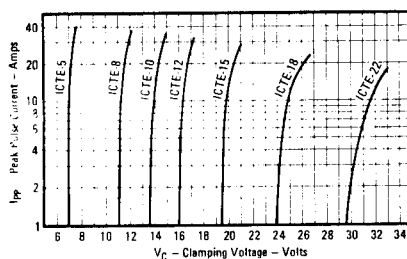


FIGURE 2
TYPICAL CHARACTERISTIC CLAMPING VOLTAGE
VS PEAK PULSE CURRENT



$V_{(BR)}$ — Breakdown Voltage — Volts

FIGURE 3
TYPICAL CAPACITANCE VS
BREAKDOWN VOLTAGE
(UNIDIRECTIONAL TYPES)



$V_{(BR)}$ — Breakdown Voltage — Volts

FIGURE 4
TYPICAL CAPACITANCE VS
BREAKDOWN VOLTAGE
(BIDIRECTIONAL TYPES)