

**Integrated EMI Filter & ESD Protection For
Earpiece Speaker Ports**
PRODUCTION DATA SHEET
DESCRIPTION

Proliferation of digital portable electronic equipment has created a noisy environment in which all devices become susceptible to Electromagnetic Interference (EMI). Interference from cell phone frequencies of 800-900 MHz and 1.9GHz as well as the growing wireless LAN frequencies of 2.4-6GHz can couple into the speaker port of a handheld device and adversely affect its performance. FCC Part 15 sets maximum allowable emission and immunity levels for all digital devices.

LX7205 is an integrated low pass filter with ESD protection that filters out the undesired frequencies as well as protecting the port against both positive and negative ESD voltages. The device is a 3x2 array flip chip and measures 1.5 x 1.0 x 0.65 mm. The small size and profile of this device is ideally suited for portable applications. The absence of leadframe and bondwires minimizes inductance and optimizes the high frequency filter performance. LX7205 exceeds the requirements of IEC61000-4-2 (15KV air discharge and 8KV contact discharge).

IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

KEY FEATURES



- Flip Chip construction
- Bi-directional EMI/RFI low-pass filter
- ESD protection with integrated line termination resistor
- Bi-directional TVS protects against negative ESD voltages in audio applications
- Low TVS operating voltage (5.0V)
- Low leakage current
- 0.5mm Pitch Chip Scale Package designed for direct assembly on FR4 PCB using conventional assembly techniques

BENEFITS

- Filter response characterized up to 6 GHz
- <2dB insertion loss in the pass band
- >20dB attenuation in the 800-900 MHz range
- >12dB attenuation in the WLAN frequencies of 2.4GHz and 5.0-6.0 GHz

APPLICATIONS

- Cell phones and Accessories
- Personal Digital Assistants (PDA's)
- Pagers
- MP3 Players
- Desktops and Notebook Computers
- Digital Camcorders

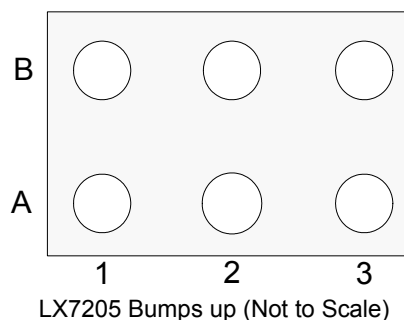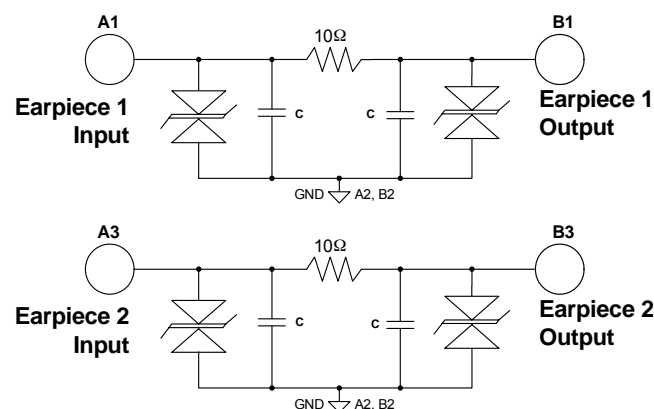PRODUCT HIGHLIGHT
Device Schematic

PACKAGE ORDER INFO

T_J (°C)	SP	0.5mm Pitch Chip Scale Package (CSP)
-40 to 125		LX7205ISP

Note: Available in Tape & Reel. Append the letters "TR" to the part number. (i.e. LX7205ISP-TR)

ABSOLUTE MAXIMUM RATINGS

Peak Pulse Power ($t_p = 8/20 \mu s$) IEC61000-4-5250W
 Peak Pulse Current ($t_p = 8/20 \mu s$) IEC61000-4-526A
 ESD Air Discharge per IEC61000-4-230KV
 ESD Contact Discharge per IEC61000-4-230KV
 Operating Temperature-40°C to +125°C
 Storage Temperature Range.....-55°C to +150°C

Note: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of specified terminal.

PACKAGE PIN OUT


SP PACKAGE
(Bump Up Angle)

FUNCTIONAL PIN DESCRIPTION

Name	Description
A1	Line 1 Input
B1	Line 1 Output
A2 & B2	Ground
A3	Line 2 Input
B3	Line 2 Output

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, the following specifications apply over the operating ambient temperature $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ except where otherwise noted and the following test conditions:

Parameter	Symbol	Test Conditions	LX7205			Units
			Min	Typ	Max	
Stand-Off Voltage	V_{RWM}				5.0	V
Breakdown Voltage	V_{BR}	$I_R = 1\text{mA}$	6			V
Leakage Current	I_R	$VRWM = \pm 5.0\text{V}, T_A = 25^\circ\text{C}$	-1		1	μA
Series Resistance, A1 to B1	R_S		9	10	11	Ω
Series Resistance, A3 to B3	R_S		9	10	11	Ω
Temperature Coefficient of R_S	T_{COEFF}	Each Line		200		Ppm
Capacitor, A1 or B1 to GND	C	$V_R = 2.5\text{V}, f = 1\text{MHz}$	115	145	175	pF
Capacitor, A3 or B3 to GND	C	$V_R = 2.5\text{V}, f = 1\text{MHz}$	115	145	175	pF



RECOMMENDED PCB PARAMETERS

Parameter	Value
Cu pad size	0.275 +0.0/-0.025 mm
Pad Pitch	0.5mm
Pad Definition	Non-Solder Mask Defined
Solder Mask Opening	0.325 ± 0.025 mm
Solder Stencil	0.25 x 0.25 mm square, 0.125 mm thick, laser cut, electro-polished
Pad Protective Finish	OSP (Organic Surface Preservative)

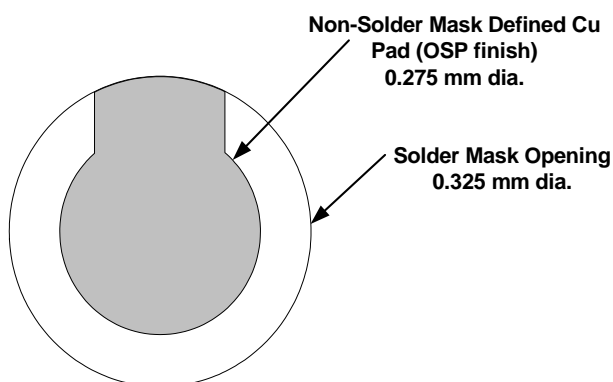


Figure 1 – Recommended Non-Solder Mask Defined Pad

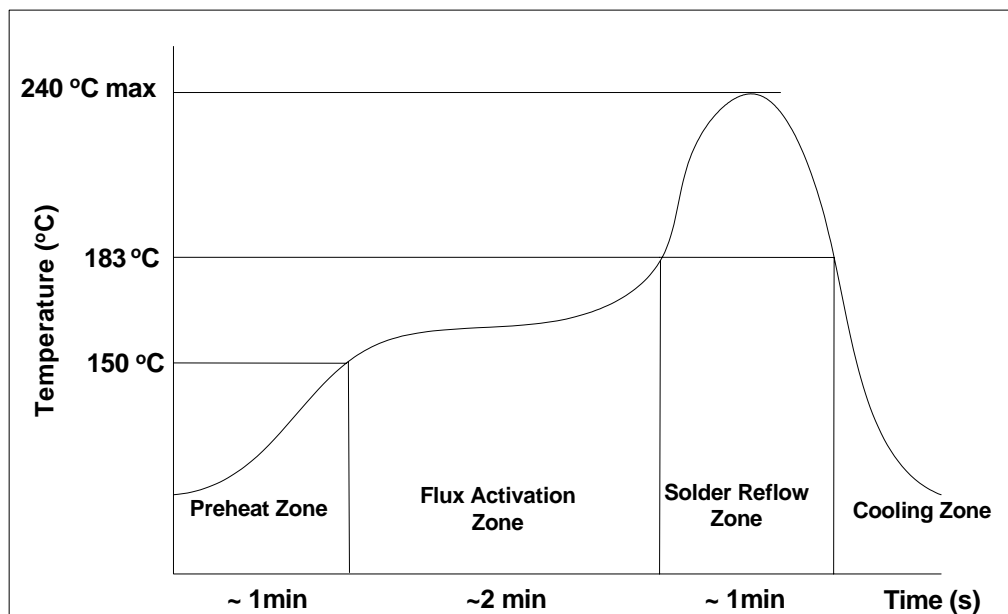


Figure 2 – Solder Reflow Profile. Max Temperature is 240°C and maximum time above liquious (183°C) is 60 seconds

**Integrated EMI Filter & ESD Protection For
Earpiece Speaker Ports**
PRODUCTION DATA SHEET

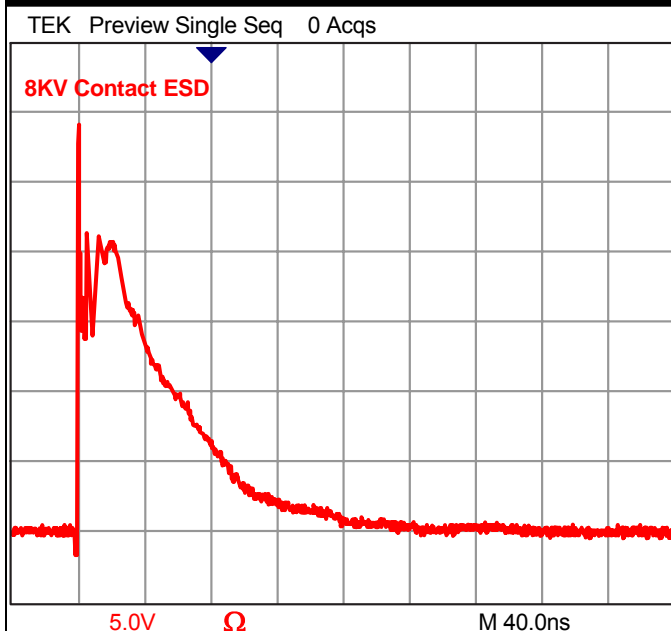


Chart 1 – 8KV ESD Input pulse as per IEC61000-4-2. Vertical scale is equivalent to 5A/DIV

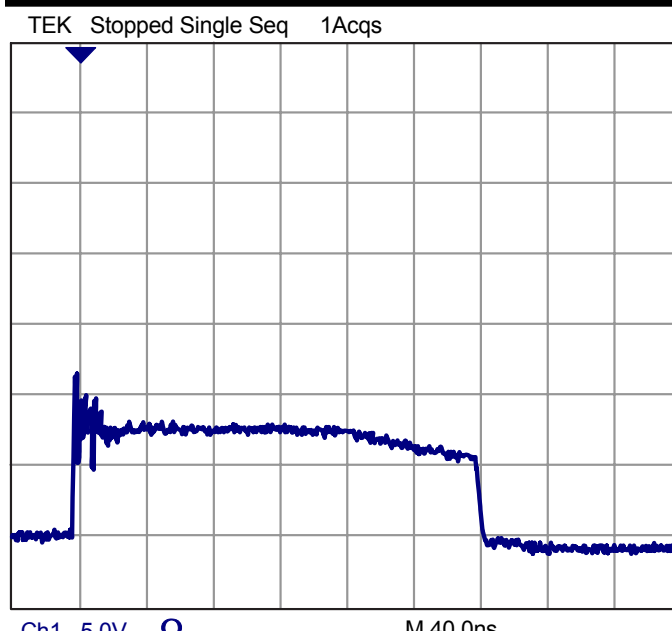


Chart 2 – Clamping Characteristics when device subjected to an 8KV ESD pulse.

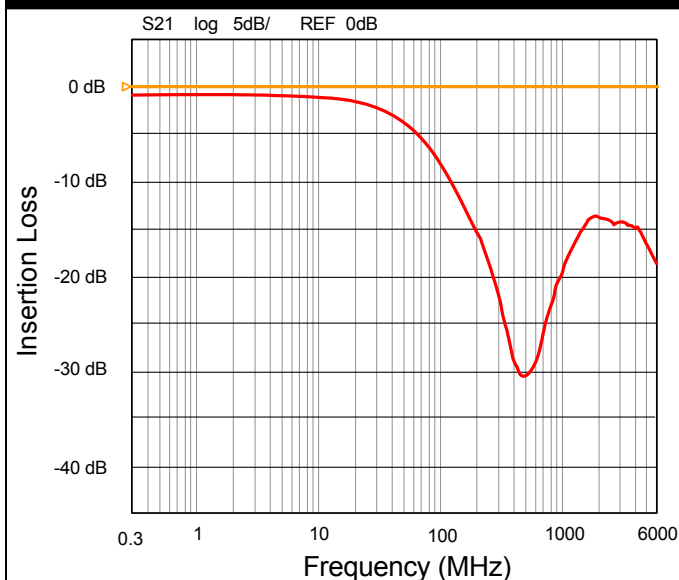


Chart 3 – Typical frequency response curve of the EMI filter (A1 – B1 or A3 – B3)




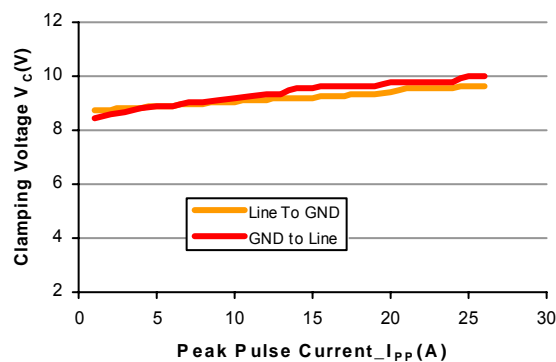


Chart 4 – Clamping Voltage vs. Peak Pulse Current.
Waveform parameters: $T_r = 8\mu s$, $t_d = 20\mu s$. Per IEC61000-4-5

PACKAGE DIMENSIONS & MARKING
SP 0.5mm Chip Scale Package

Pin A1 Identification Mark


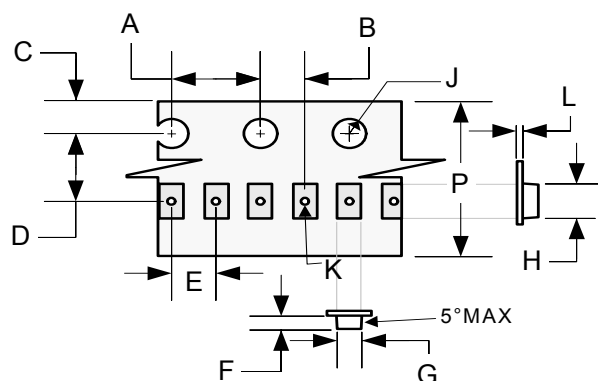
Y = Year | WW = Work Week | A = Lot Code
SP Package – Bump Side Down

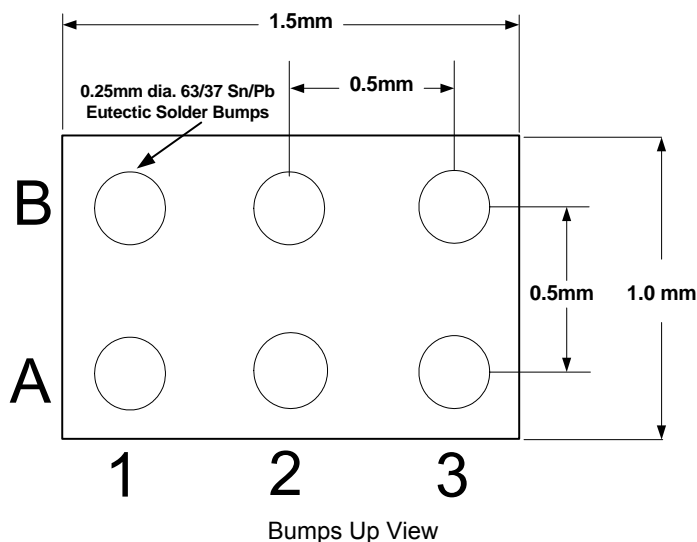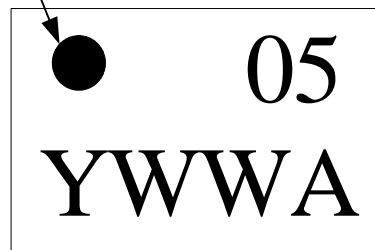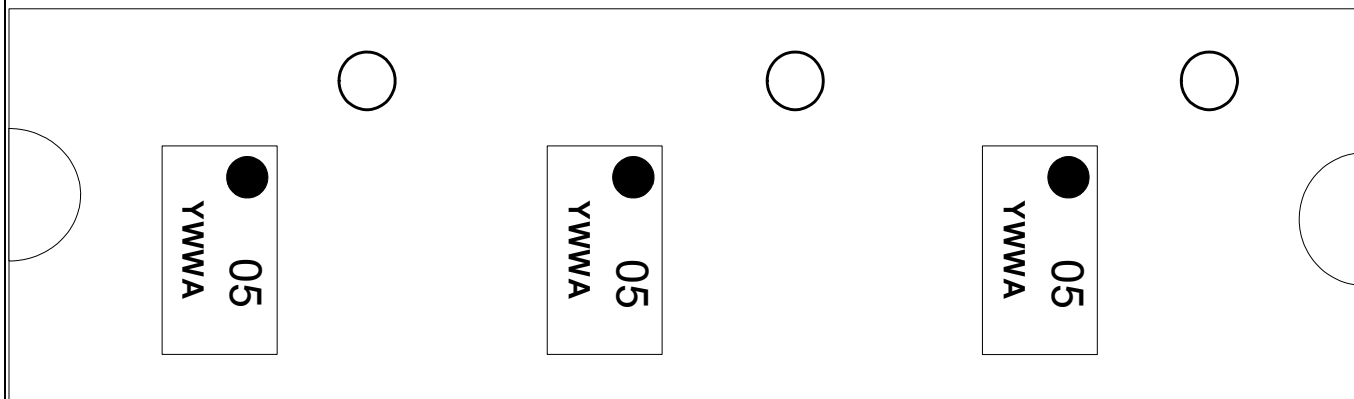


Part Orientation in Tape

**Integrated EMI Filter & ESD Protection For
Earpiece Speaker Ports**
PRODUCTION DATA SHEET

TAPE SPECIFICATIONS



Dim	MILLIMETERS	
	MIN	MAX
A	3.90	4.10
B	1.95	2.05
C	1.65	1.85
D	3.45	3.55
E	1.90	2.10
F	0.67	0.77
G	1.03	1.13
H	1.75	1.85
J	1.40	1.60
K	0.45	0.55
L	0.252	0.256

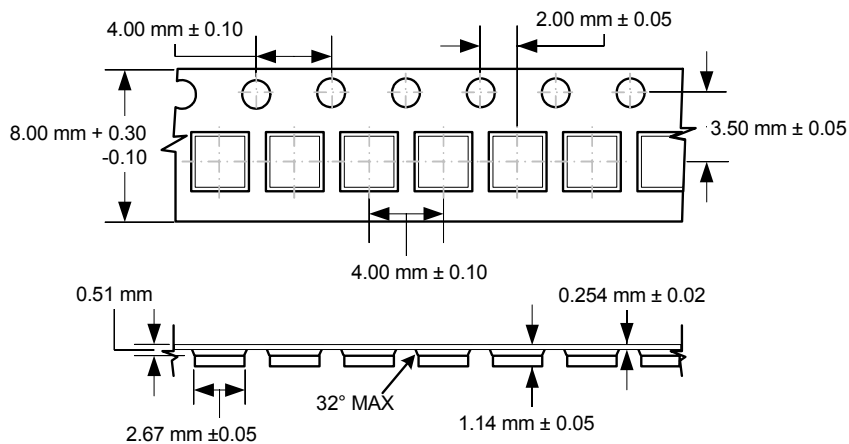



Microsemi[®]

LX7205

**Integrated EMI Filter & ESD Protection For
Earpiece Speaker Ports**

PRODUCTION DATA SHEET

NOTES

PRODUCTION DATA – Information contained in this document is proprietary to Microsemi and is current as of publication date. This document may not be modified in any way without the express written consent of Microsemi. Product processing does not necessarily include testing of all parameters. Microsemi reserves the right to change the configuration and performance of the product and to discontinue product at any time.