

Surface Mount Frequency Mixer

Level 7 (LO Power +7 dBm) 200 to 1000 MHz

ADE-4+
ADE-4




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA


Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
□ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low conversion loss, 6.8 dB typ.
- good L-R isolation, 53 dB typ.
- low profile package
- aqueous washable
- low cost
- protected by U.S. Patent 6,133,525

Applications

- cellular
- VHF/UHF receivers

CASE STYLE: CD542

PRICE: \$4.25 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)
LO/RF	IF	M	Total Range	Max.	L	M	U	L	M	U	
$f_L - f_U$		\bar{X}	σ		Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
200-1000	DC-800	6.8	0.10	8.5	60	45	53	40	45	30	15


1 dB COMP.: +1 dBm typ.

L = 200-400 MHz M = 400-500 MHz U = 500-1000 MHz

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
200.00	230.00	7.14	60.34	44.99	1.41	2.56
250.00	280.00	6.82	59.00	43.67	1.38	2.28
300.00	330.00	6.87	57.00	43.34	1.39	2.20
350.00	380.00	7.02	59.50	42.50	1.40	2.10
375.00	405.00	6.89	59.01	42.17	1.40	2.10
400.00	430.00	6.97	59.17	41.33	1.39	2.17
450.00	480.00	6.72	56.50	40.17	1.37	2.04
475.00	505.00	6.82	56.67	39.67	1.36	2.10
500.00	530.00	6.85	57.32	39.17	1.37	2.10
550.00	580.00	6.93	56.67	38.50	1.39	2.10
600.00	630.00	7.03	55.83	37.84	1.39	2.10
650.00	680.00	6.90	54.33	37.00	1.34	2.10
675.00	705.00	6.94	53.34	36.67	1.34	2.13
700.00	730.00	6.90	52.84	36.17	1.34	2.07
750.00	780.00	6.96	51.50	35.33	1.32	2.20
800.00	830.00	7.00	49.83	34.50	1.28	2.10
850.00	880.00	6.83	48.00	32.99	1.24	2.28
900.00	930.00	6.70	47.00	31.66	1.22	2.20
950.00	980.00	6.81	45.83	30.83	1.18	2.41
1000.00	1030.00	6.82	44.33	30.33	1.11	2.46

Electrical Schematic

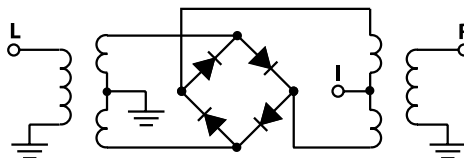

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. B
M98898
ADE-4
ED-7563/1
WL/TD/CP/AM
060613

Performance Charts

ADE-4+
ADE-4

