

Surface Mount Bi-Directional Coupler

High Power, 50Ω 1800 to 4200 MHz

BDCA-16-30+
BDCA-16-30




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C


Pin Connections

INPUT	1
OUTPUT	6
COUPLED (forward)	10
COUPLED (reverse)	5
GROUND	2,3,4,7,8,9

Outline Drawing

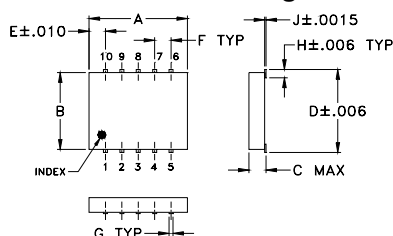

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.30	.250	.052	.262	.050	.050	.012
7.62	6.35	1.32	6.66	1.27	1.27	0.30
H	J	K	L	M	wt	
.027	.004	.085	.296	.030	grams	
0.69	0.10	2.16	7.52	0.76	0.25	

Demo Board MCL P/N: TB-115 Suggested PCB Layout (PL-004)

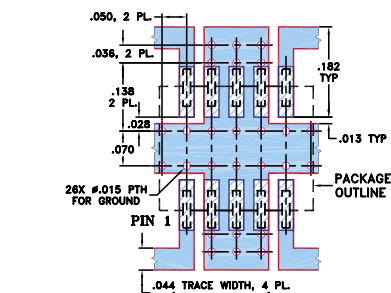

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020 ± .0015; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- four-port coupler
- wideband, 1800 to 4200 MHz
- low insertion loss, 0.4 dB typ.
- hermetically sealed
- low temperature variation
- low profile. 0.052" height
- protected by US Patent 7,049,905

Applications

- PCS
- ISM
- MDS
- defense

CASE STYLE: DZ944

PRICE: \$5.95 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Bi-Directional Coupler Electrical Specifications




FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT ² (W)
	Nom.	Max. Flatness	Typ.	Max.	Typ.	Min.		
1800-4200								
1800-3000	15.2±1.0	±1.2	0.5	0.9	23	13	1.3	24
1800-2500	15.5±0.7	±1.0	0.4	0.9	22	14	1.3	27
3000-4200	14.8±0.5	±1.0	0.7	1.2	18	13	1.3	18

1. Includes theoretical power loss of 0.11 dB at 16 dB coupling.


2. Derate linearly 1/3 at 100°C

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)		Directivity (dB)		Return Loss (dB)			
		In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd
1800.00	0.41		16.30	16.30	19.42	20.12	21.25	21.37	24.36
2000.00	0.47		15.80	15.79	18.24	18.65	19.08	19.19	21.44
2100.00	0.50		15.59	15.58	17.77	18.03	18.32	18.39	20.37
2300.00	0.55		15.24	15.25	17.27	17.21	17.42	17.40	18.62
2500.00	0.59		14.96	14.96	16.87	16.71	17.13	17.08	17.98
2700.00	0.61		14.72	14.72	17.09	16.46	17.58	17.63	18.07
2880.00	0.61		14.53	14.53	17.34	16.63	18.93	18.70	18.76
3000.00	0.61		14.42	14.43	17.62	16.96	20.57	20.11	19.50
3600.00	0.65		14.39	14.37	22.92	19.92	26.02	25.31	33.48
4200.00	0.84		15.24	15.23	19.29	17.42	15.01	14.78	19.56

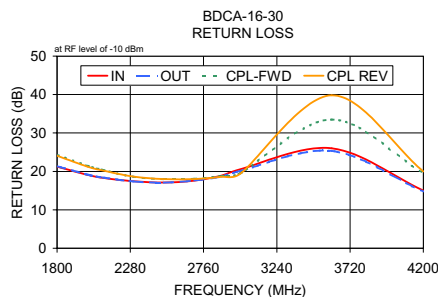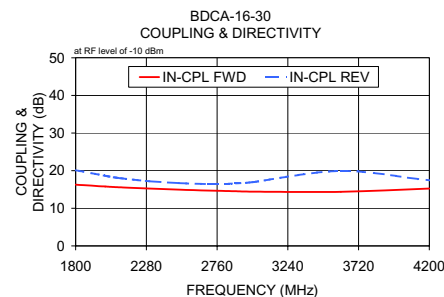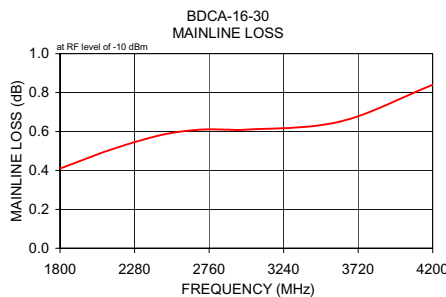

electrical schematic

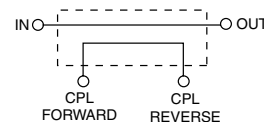

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. D
M102713
ED-9168
BDCA-16-30
LC/TD/CP
060720