

# Miniature Surface Mount Fixed Attenuator

50Ω 0.5W 12dB DC to 2500 MHz

LAT-12+  
LAT-12



## Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C

## Pin Connections

INPUT	4
OUTPUT	2
GROUND	1,3

## Features

- wideband, DC to 2500 MHz
- excellent VSWR, through entire band
- miniature size, SOT143 package
- aqueous washable

## Applications

- cellular
- PCS
- ISM
- VHF/UHF

CASE STYLE: MMM168


PRICE: \$1.95 ea. QTY (10-49)

**+ RoHS compliant in accordance  
with EU Directive (2002/95/EC)**

*The +Suffix identifies RoHS Compliance. See our web site  
for RoHS Compliance methodologies and qualifications.*

## Outline Drawing

PCB Land Pattern

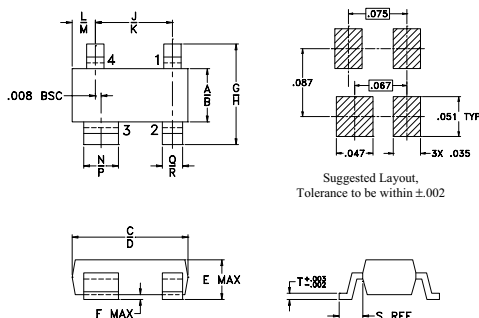

## Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K
.045	.055	.105	.120	.047	.005	.083	.104	.070	.080
1.14	1.40	2.67	3.05	1.19	0.13	2.11	2.64	1.78	2.03
L	M	N	P	Q	R	S	T	wt	
.018	.24	.030	.036	.015	.021	.023	.005	grams	
0.46	6.10	0.76	0.91	0.38	0.53	0.58	0.13		0.01

## Electrical Specifications at 25°C



FREQ. RANGE (MHz)	ATTENUATION (dB) Flatness, Max.			VSWR (:1) Max.			MAX. INPUT POWER <sup>1</sup> (W)	
	DC-0.5 GHz	DC-1 GHz	DC-2.5 GHz	DC-0.5 GHz	DC-1 GHz	DC-2.5 GHz		
f <sub>L</sub> -f <sub>U</sub>	Norm.							
DC-2500	12±0.8	0.3	0.5	0.8	1.3	1.4	1.6	0.5

1. RF power at 25°C case temperature: ½Watt. Derate linearly to 0.2 Watt at 85°C.

2. Flatness= variation over band divided by 2

## Typical Performance Data

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
1.00	11.68	1.08
10.00	11.69	1.07
50.00	11.70	1.07
100.00	11.71	1.08
500.00	11.75	1.09
1000.00	11.82	1.11
1600.00	11.90	1.19
2000.00	11.98	1.23
2250.00	12.06	1.27
2500.00	12.14	1.30

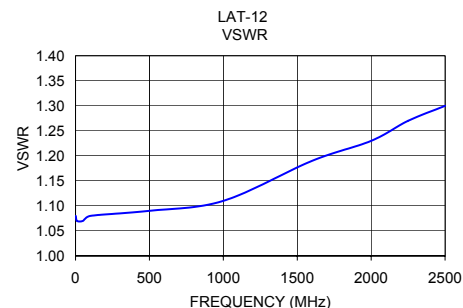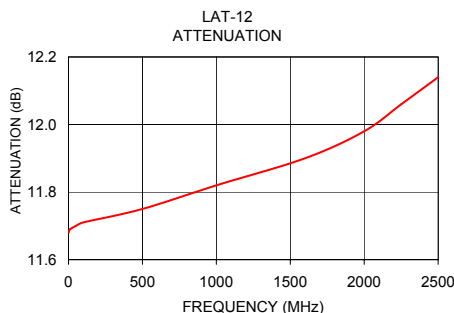

designers kit available

Kit No.	No. of Units in Kit	Description	Price \$ per Kit
K1-LAT	36	4 of ea. LAT-3(+), 6(+), 10(+), 15(+), 20(+) 2 of ea. LAT-1(+), 2(+), 4(+), 5(+), 7(+), 8(+), 9(+), 12(+)	59.95

**Mini-Circuits®**

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. D  
M104321  
LAT-12  
060828