

Ceramic

Low Pass Filter

DC to 2750 MHz

NEW!

LFCN-2750



BLUE CELL™

CASE STYLE: FV1206

Model	Price	Qty.
LFCN-2750	\$1.99	(10-49)
LFCN-2750D	\$2.49	(10-49)

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	10W max. at 25°C
DC Current Input to Output	0.5A max. at 25°C

*Passband rating, derate linearly to 3.5W at 100°C


ambient.

Pin Connections

RF IN	1**
RF OUT	3**
GROUND	2,4

**RF IN & RF OUT can be interchanged

Outline Drawing

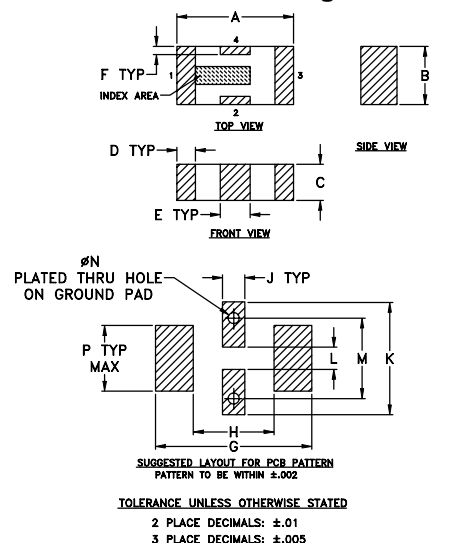


Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.126	.063	.039	.020	.032	.009	.169	.087
3.20	1.60	0.99	0.51	0.81	0.23	4.29	2.21
J	K	L	M	N	P	wt.	
.024	.122	.024	.087	.012	.071	grams	
0.61	3.10	0.61	2.21	0.30	1.80	.020	

Demo Board MCL P/N: TB-270

Suggested PCB Layout (PL-137)

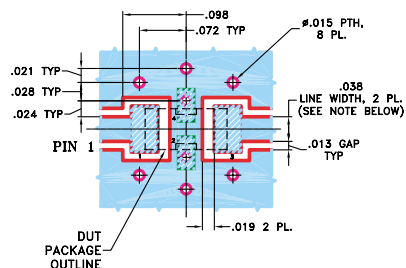

Features

- excellent power handling, 10W
- small size
- 7 sections
- temperature stable
- patent pending

Applications


- harmonic rejection
- VHF/UHF transmitters/receivers
- lab use

Low Pass Filter Electrical Specifications¹ (T_{AMB}=25°C)


MODEL NO.	PASSBAND (MHz) (loss < 1 dB) Max.	fco, MHz Nom. (loss 3 dB) Typ.	STOP BAND (MHz) (loss, dB)			VSWR (:1)		NO. OF SECTIONS
			f 20 Min.	30 Typ.	fr 20 Typ.	Stopband Typ.	Passband Typ.	
LFCN-2750	DC-2750	3150	3875	4050-6800	8400	20	1.2	7

1. For Applications requiring DC voltage to be applied to the Input or output, use LFCN-2750D (DC Resistance to ground is 100 Mohms min.)

typical frequency response





schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
100.00	0.10	1.02
500.00	0.21	1.06
1300.00	0.39	1.09
2100.00	0.61	1.15
2750.00	1.15	1.50
3150.00	3.32	2.79
3775.00	23.45	18.70
3900.00	28.99	22.29
4400.00	35.96	32.79
5600.00	36.40	34.07
6400.00	34.00	28.49
6800.00	29.93	26.74
7800.00	23.36	22.87
8400.00	20.08	19.54
9000.00	17.02	16.41

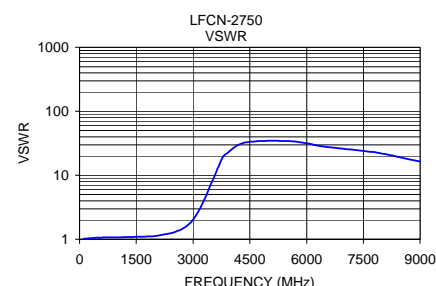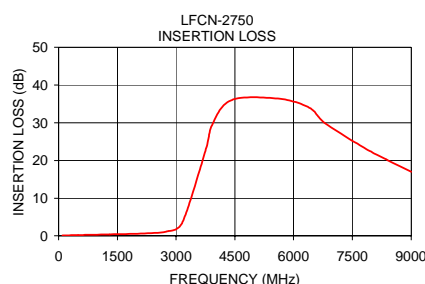

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. B
M96263
LFCN-2750
ED-6783/4
RVN/AD/CP
050113