

Surface Mount Directional Coupler

50Ω 300 to 1100 MHz


Maximum Ratings

Operating Temperature	-40°C to 85 °C
Storage Temperature	-55°C to 100°C

Pin Connections

INPUT	6
OUTPUT	1
COUPLED	4
GROUND	2,5
ISOLATE (DO NOT USE)	3


Outline Drawing

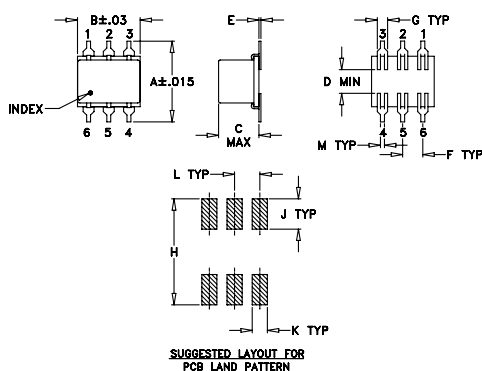

Outline Dimensions (inch)

A	B	C	D	E	F	G
.400	.31	.200	.10	.010	.100	.050
10.16	7.87	5.08	2.54	0.25	2.54	1.27
H	J	K	L	M	wt	
.420	.120	.060	.100	.020	grams	
10.67	3.05	1.52	2.54	0.51	0.55	

Demo Board MCL P/N: TB-31 Suggested PCB Layout (PL-087)

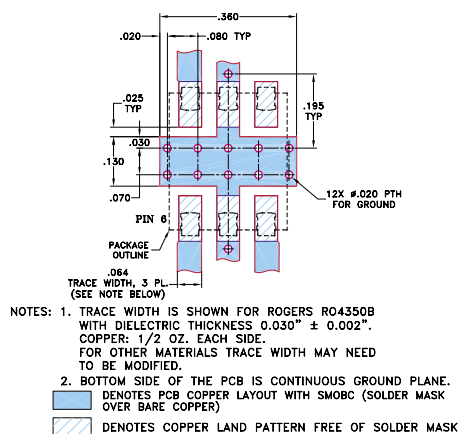

Features

- low insertion loss, 0.25 dB typ.
- high directivity, 17 dB typ.

Applications

- VHF/UHF
- cellular
- communications
- signal sampling



CASE STYLE: QQQ130
PRICE: \$15.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT, W	
f _L -f _U	Nom.	Flatness	Typ.	Max.	Typ.	Min.	Typ.	L Max.	MU Max.
300-1100	20.5±1.0	±1.3	0.25	0.6	17	10	1.2	2.0	2.0


1. Mainline loss includes theroretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
300.00	0.30	22.27	18.46	15.52	15.46	16.06
438.46	0.26	22.11	17.25	18.41	18.43	19.61
576.92	0.26	21.96	16.06	20.51	20.53	24.62
715.38	0.28	21.80	15.20	22.14	22.18	31.13
807.69	0.30	21.67	14.83	22.93	23.08	31.10
900.00	0.32	21.51	14.54	23.56	23.66	27.46
950.00	0.34	21.43	14.42	23.84	24.00	33.75
1000.00	0.35	21.33	14.34	23.91	24.09	25.94
1050.00	0.37	21.21	14.26	23.80	24.04	32.75
1100.00	0.39	21.10	14.24	23.78	24.01	25.15

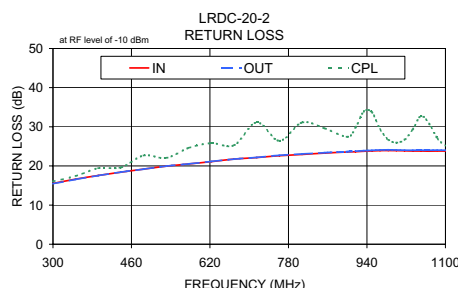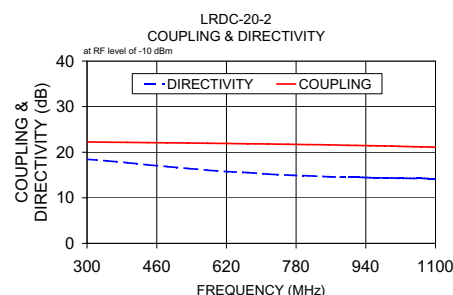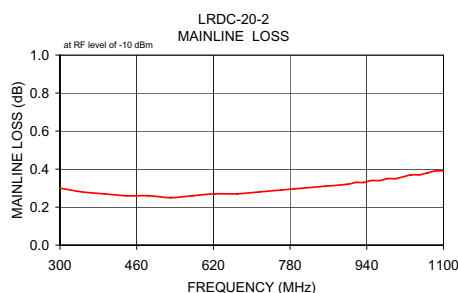

electrical schematic



Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. A
M98898
LRDC-20-2
WZ/TD/CP
060718