

Surface Mount Frequency Mixer

Level 7 (LO Power +7dBm) 5 to 1000 MHz

LRMS-2+
LRMS-2



CASE STYLE: QQQ130
PRICE: \$6.95 ea. QTY (1-9)

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Pin Connections

LO	1
RF	4
IF	5
GROUND	2,3,6

Features

- low conversion loss, 6.67 dB typ.
- excellent L-R isolation, 40 dB typ.


Applications

- VHF/UHF
- instrumentation
- cellular

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Outline Drawing

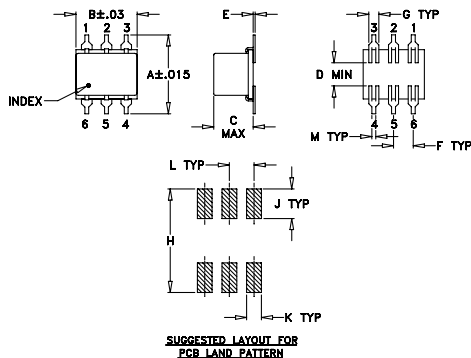


Outline Dimensions (inch)

A	B	C	D	E	F	G
.400	.31	.200	.10	.010	.100	.050
10.16	7.87	5.08	2.54	0.25	2.54	1.27

H	J	K	L	M	wt
.420	.120	.060	.100	.020	grams
10.67	3.05	1.52	2.54	0.51	0.55

Demo Board MCL P/N: TB-44 Suggested PCB Layout (PL-083)

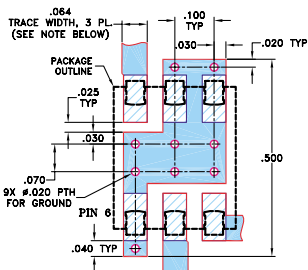

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF f_L - f_U	IF	Mid-Band m			Total Range Max.	L		M		U		L		M		U		
		\bar{X}	σ	Max.		Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.			
5-1000	DC-1000	6.67	.26	8.0	9.5	60	40	40	20	25	18	55	30	30	20	20	12	16

1 dB COMP.: +1 dBm typ.

L = low range [f_L to 10 f_L]
m= mid band [$2f_L$ to $f_U/2$]

M = mid range [10 f_L to $f_U/2$]
U = upper range [$f_U/2$ to f_U]

1 dB COMP.: +1 dBm typ.

L = low range [f_L to 10 f_L]
m = mid band [$2f_L$ to $f_U/2$]


M = mid range [10 f_L to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
5.00	35.00	7.10	54.80	61.28	1.65	2.68
10.00	40.00	6.75	53.66	60.10	1.39	2.70
34.00	64.00	6.65	49.48	56.02	1.28	2.69
42.00	72.00	6.71	48.42	54.85	1.29	2.68
50.00	80.00	6.65	47.48	53.84	1.30	2.65
75.00	105.00	6.64	45.18	51.63	1.31	2.61
100.00	130.00	6.75	43.57	50.79	1.31	2.68
200.00	230.00	6.76	38.78	47.49	1.32	2.76
250.00	280.00	6.77	37.05	44.64	1.34	2.60
300.00	330.00	6.83	35.93	42.49	1.32	2.72
400.00	430.00	6.97	34.39	38.85	1.30	2.70
450.00	480.00	6.93	33.35	36.67	1.30	2.67
500.00	530.00	7.05	32.80	35.07	1.29	2.83
550.00	580.00	7.12	31.89	32.96	1.29	2.91
600.00	630.00	7.08	31.55	31.69	1.29	2.60
700.00	730.00	7.06	30.41	29.33	1.26	2.90
750.00	780.00	7.16	29.49	27.72	1.31	2.89
800.00	830.00	7.08	28.87	26.26	1.38	3.38
900.00	930.00	6.95	27.66	22.68	1.65	3.59
1000.00	1030.00	7.11	27.40	21.43	1.80	3.96

Electrical Schematic

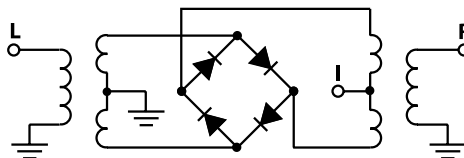

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. A
M98898
LRMS-2
DJ/FL/CP/AM
060804
Page 1 of 2

Performance Charts

LRMS-2+ LRMS-2

