

Surface Mount

# Power Splitter/Combiner

2 Way-0° 75Ω 2 to 500 MHz


## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.


## Pin Connections

SUMPORT	6
PORT 1	4
PORT 2	3
GROUND	1
NOT USED	2,5

## Outline Drawing

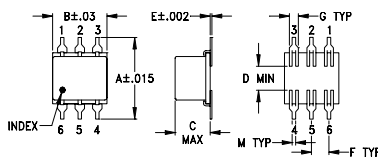

### PCB Land Pattern




## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.400	.31	.200	.10	.010	.100	.050
10.16	7.87	5.08	2.54	0.25	2.54	1.27

H	J	K	L	M	wt
.420	.120	.060	.100	.020	grams
10.67	3.05	1.52	2.54	0.51	0.55

## Demo Board MCL P/N: TB-221 Suggested PCB Layout (PL-109)

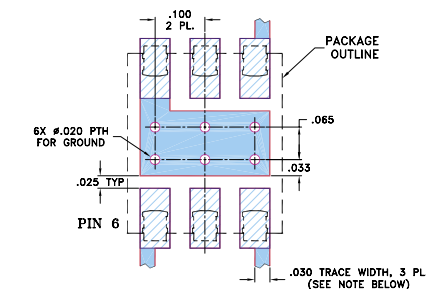

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- insertion loss 0.35 dB typ.
- high isolation, 35 dB typ.

## Applications

- VHF/UHF
- catv
- communications systems



CASE STYLE: QQQ130  
PRICE: \$8.95 ea. QTY. (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




## Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L		M		U	
f <sub>L</sub> -f <sub>U</sub>	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
2-500	35	18	35	25	27	20	0.3	0.8	0.35	0.6	0.5	1.0	1.0	2.0	3.0	0.15	0.2	0.3

L = 2-20 MHz M = 20-250 MHz U = 250-500 MHz

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
2.00	3.32	3.29	0.03	30.42	0.05	1.07	1.25	1.25
10.00	3.29	3.28	0.01	39.35	0.00	1.07	1.20	1.20
14.00	3.29	3.27	0.03	39.99	0.01	1.07	1.20	1.20
20.00	3.30	3.27	0.02	39.87	0.05	1.07	1.20	1.20
50.00	3.30	3.28	0.02	37.98	0.01	1.08	1.19	1.19
80.00	3.31	3.28	0.03	35.87	0.11	1.08	1.19	1.19
110.00	3.33	3.30	0.03	34.24	0.17	1.09	1.18	1.19
140.00	3.32	3.30	0.03	32.73	0.18	1.09	1.17	1.18
170.00	3.33	3.30	0.03	31.50	0.24	1.10	1.16	1.17
200.00	3.34	3.31	0.03	30.43	0.22	1.11	1.16	1.16
275.00	3.36	3.33	0.03	28.50	0.38	1.14	1.13	1.13
350.00	3.39	3.35	0.04	27.19	0.40	1.17	1.11	1.10
425.00	3.40	3.37	0.03	26.27	0.49	1.20	1.09	1.08
475.00	3.41	3.37	0.04	25.83	0.48	1.22	1.09	1.08
500.00	3.44	3.39	0.05	25.63	0.49	1.24	1.10	1.08

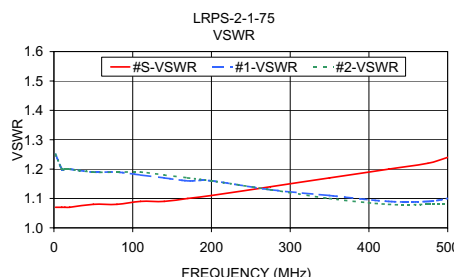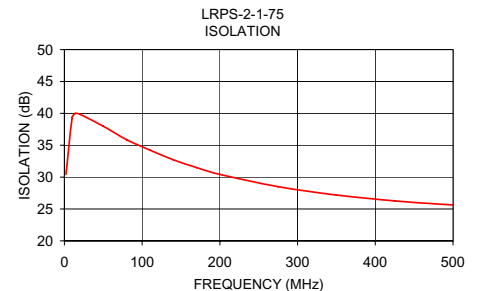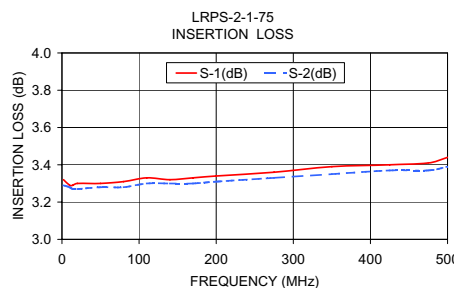

## electrical schematic



**Mini-Circuits®**

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. C  
M102713  
LRPS-2-1-75  
ED-1514/7  
DJ/CP  
060915