

Surface Mount

# Power Splitter/Combiner

2 Way-0° 75Ω 10 to 650 MHz


## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.


## Pin Connections

SUM PORT	6
PORT 1	4
PORT 2	3
GROUND	1
NOT USED	2,5

## Outline Drawing

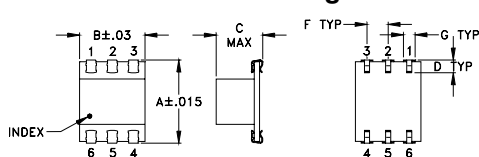

## PCB Land Pattern



Suggested Layout,  
Tolerance to be within ±.002


## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.390	.31	.225	.060	--	.100	.045
9.91	7.87	5.72	1.52	--	2.54	1.14

H	J	K	L	M	wt
.420	.120	.060	.100	--	grams
10.67	3.05	1.52	2.54	--	0.50

## Demo Board MCL P/N: TB-221 Suggested PCB Layout (PL-109)

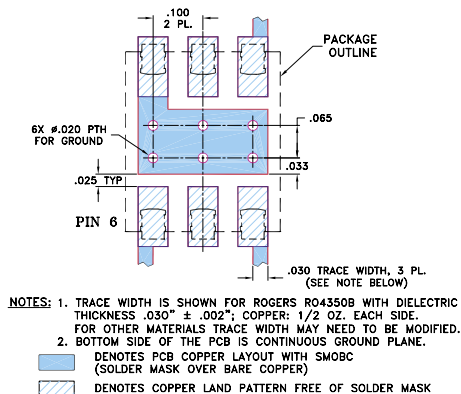

## Features

- low insertion loss, 0.6 dB typ.
- high isolation, 29 dB typ.
- aqueous washable
- J-leads for strain relief and excellent solderability

## Applications

- VHF/UHF
- communications systems
- CATV



CASE STYLE: QQQ569

PRICE: \$9.95 ea. QTY. (10-49)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




## Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L		M		U	
f <sub>c</sub> -f <sub>u</sub>	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
10-650	28	22	29	24	30	20	0.5	1.0	0.6	0.75	0.6	1.2	1.0	2.0	3.0	0.15	0.2	0.3


L = 10-100 MHz M = 100-325 MHz U = 325-650 MHz

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
10.00	3.45	3.43	0.02	31.24	0.00	1.03	1.29	1.29
20.00	3.46	3.45	0.01	31.51	0.03	1.03	1.28	1.28
40.00	3.48	3.46	0.02	30.86	0.02	1.03	1.29	1.28
70.00	3.48	3.47	0.01	30.34	0.15	1.03	1.28	1.28
100.00	3.48	3.48	0.01	29.92	0.05	1.04	1.28	1.28
130.00	3.49	3.49	0.00	29.46	0.15	1.05	1.27	1.27
160.00	3.51	3.50	0.01	29.12	0.12	1.06	1.26	1.26
190.00	3.51	3.50	0.01	28.74	0.21	1.07	1.24	1.25
220.00	3.52	3.51	0.01	28.45	0.22	1.08	1.23	1.24
250.00	3.53	3.51	0.02	28.20	0.24	1.10	1.22	1.23
325.00	3.56	3.55	0.01	27.91	0.29	1.13	1.19	1.20
400.00	3.60	3.58	0.03	28.03	0.31	1.18	1.17	1.18
475.00	3.63	3.60	0.02	28.71	0.22	1.23	1.16	1.16
550.00	3.67	3.63	0.04	29.92	0.24	1.28	1.16	1.15
650.00	3.77	3.71	0.06	31.90	0.18	1.36	1.21	1.18

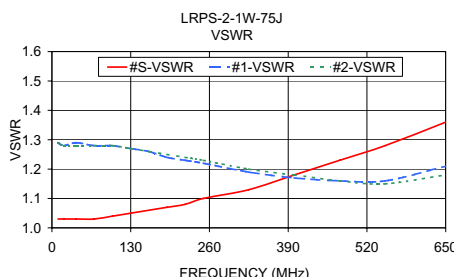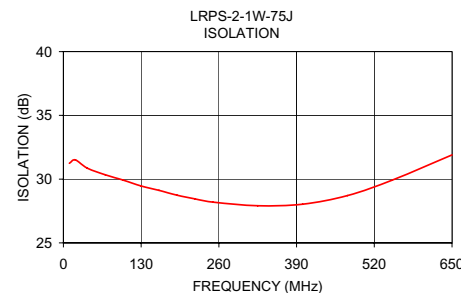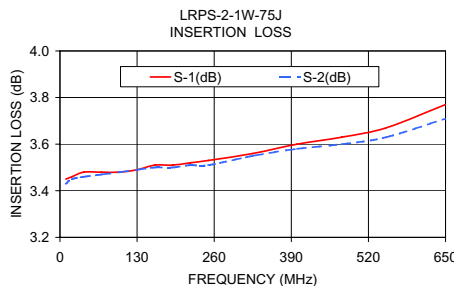

## electrical schematic

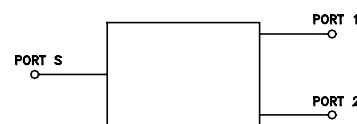

**Mini-Circuits®**

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. C  
M102713  
LRPS-2-1W-75J  
ED-1514/6  
DJ/CP  
060914